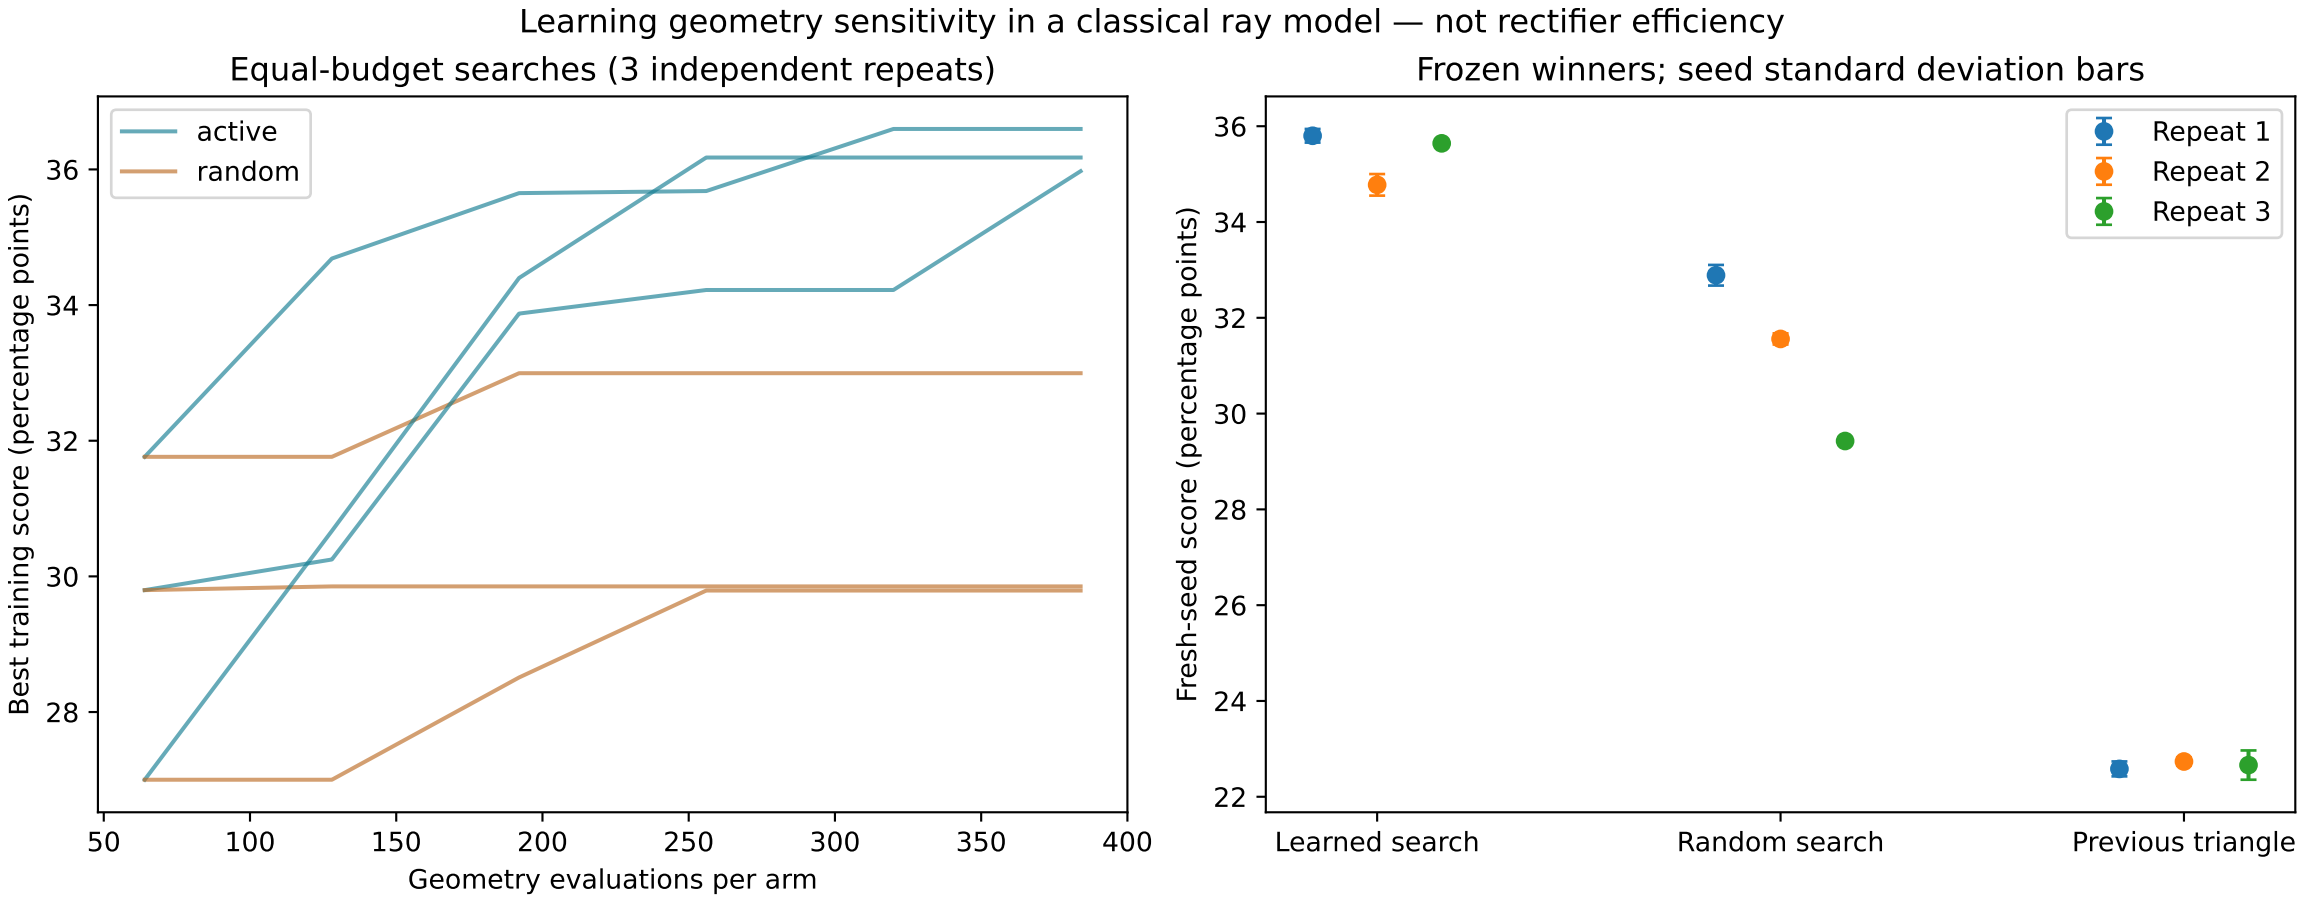
Learning geometry sensitivity in a classical ray model — not rectifier efficiency
Equal-budget searches (3 independent repeats)
active
random
Best training score (percentage points)
Geometry evaluations per arm
Frozen winners; seed standard deviation bars
Repeat 1
Repeat 2
Repeat 3
Fresh-seed score (percentage points)
Learned search
Random search
Previous triangle