[220 / 319] Iteration

Meena Syamkumar

Andy Kuemmel

- **Exam 1 next Monday (24-hour period)**
- **Fill out exam1 conflict form – by 17th Feb**

Learning Objectives Today

Reason about loops

- Motivation: need for repetition
- Condition and body of loop
- "while" syntax
- loops inside loops

Chapter 7 of Think Python

Understand common use cases

- Taking input from a user
- Computing over ranges of numbers

Learn to avoid pitfalls

- Infinite loops (when unintentional)
- Off-by-one mistakes

Worksheet

State:

N | 4

⑥

total | 0

answer | 0

Code:

1. Put 1 in the "total" box
2. If "N" equals 1, skip to step 6, otherwise continue to step 3
3. Multiply the value in "total" by the value in "N", and put the result back in "total"
4. Decrease the value in "N" by 1
5. Go to step 2
6. Copy the value in total to the answer box

Combination of conditionally skipping forward (2) with going back is (5) is called a "while loop"

Worksheet

State:

N | 4

(circle: 6)

total | 0

answer | 0

Code:

loop condition

skip past loop body

continue to loop body

1. Put 1 in the "total" box
2. If "N" equals 1, skip to step 6, otherwise continue to step 3
3. Multiply the value in "total" by the value in "N", and put the result back in "total"
4. Decrease the value in "N" by 1
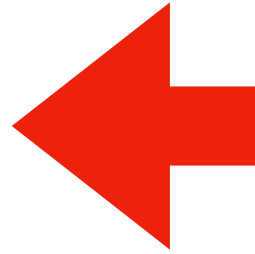5. Go to step 2
6. Copy the value in total to the answer box

loop body

going back will be implicit in Python, and will happen right after loop body. you can identify the loop body because it will be indented
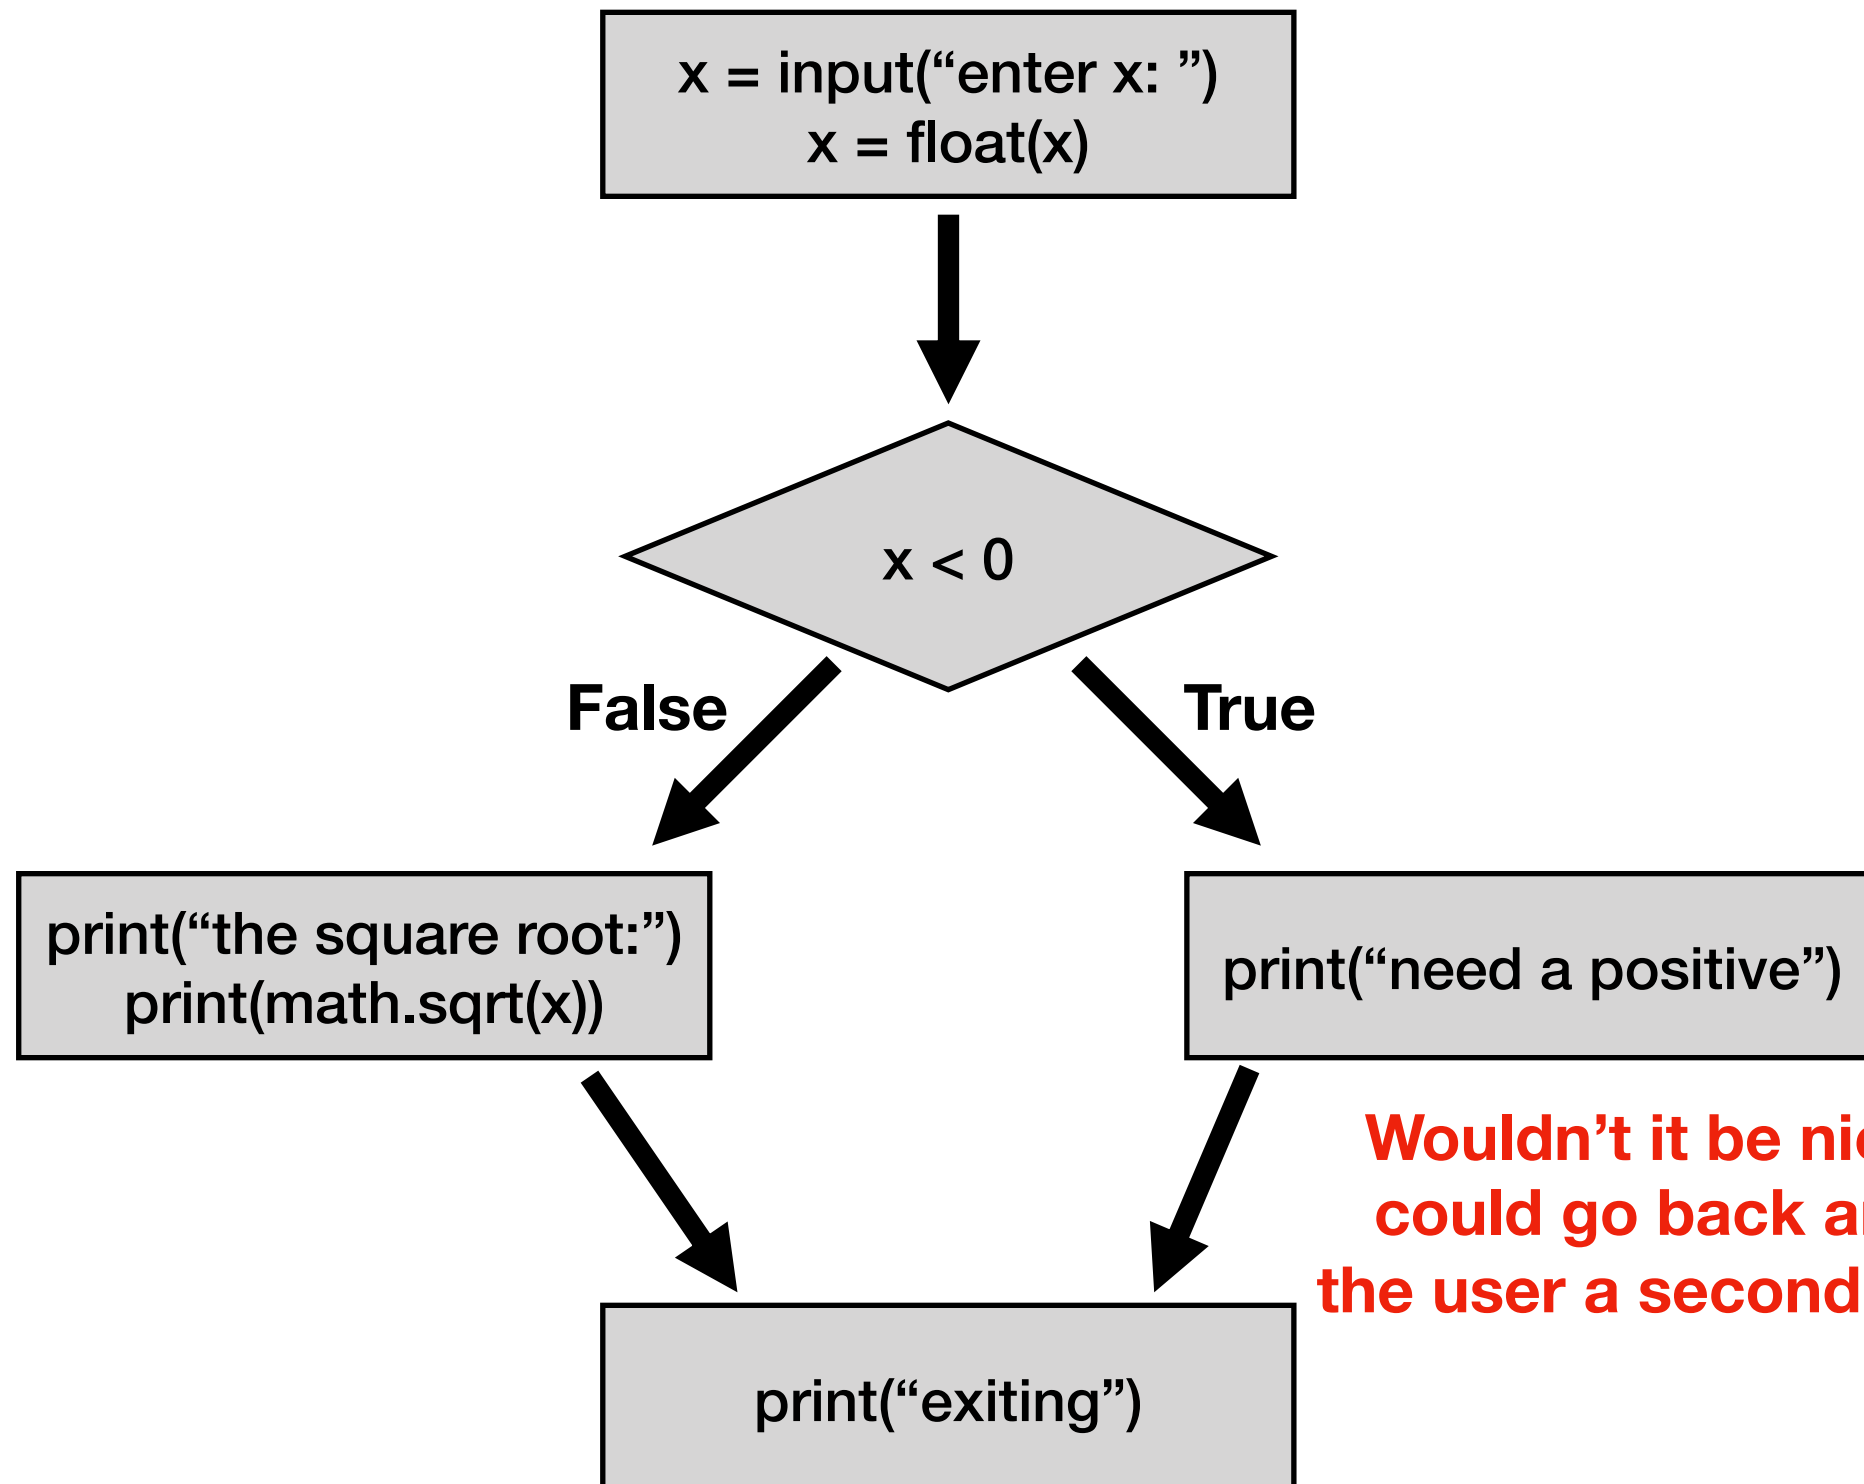
Today's Outline
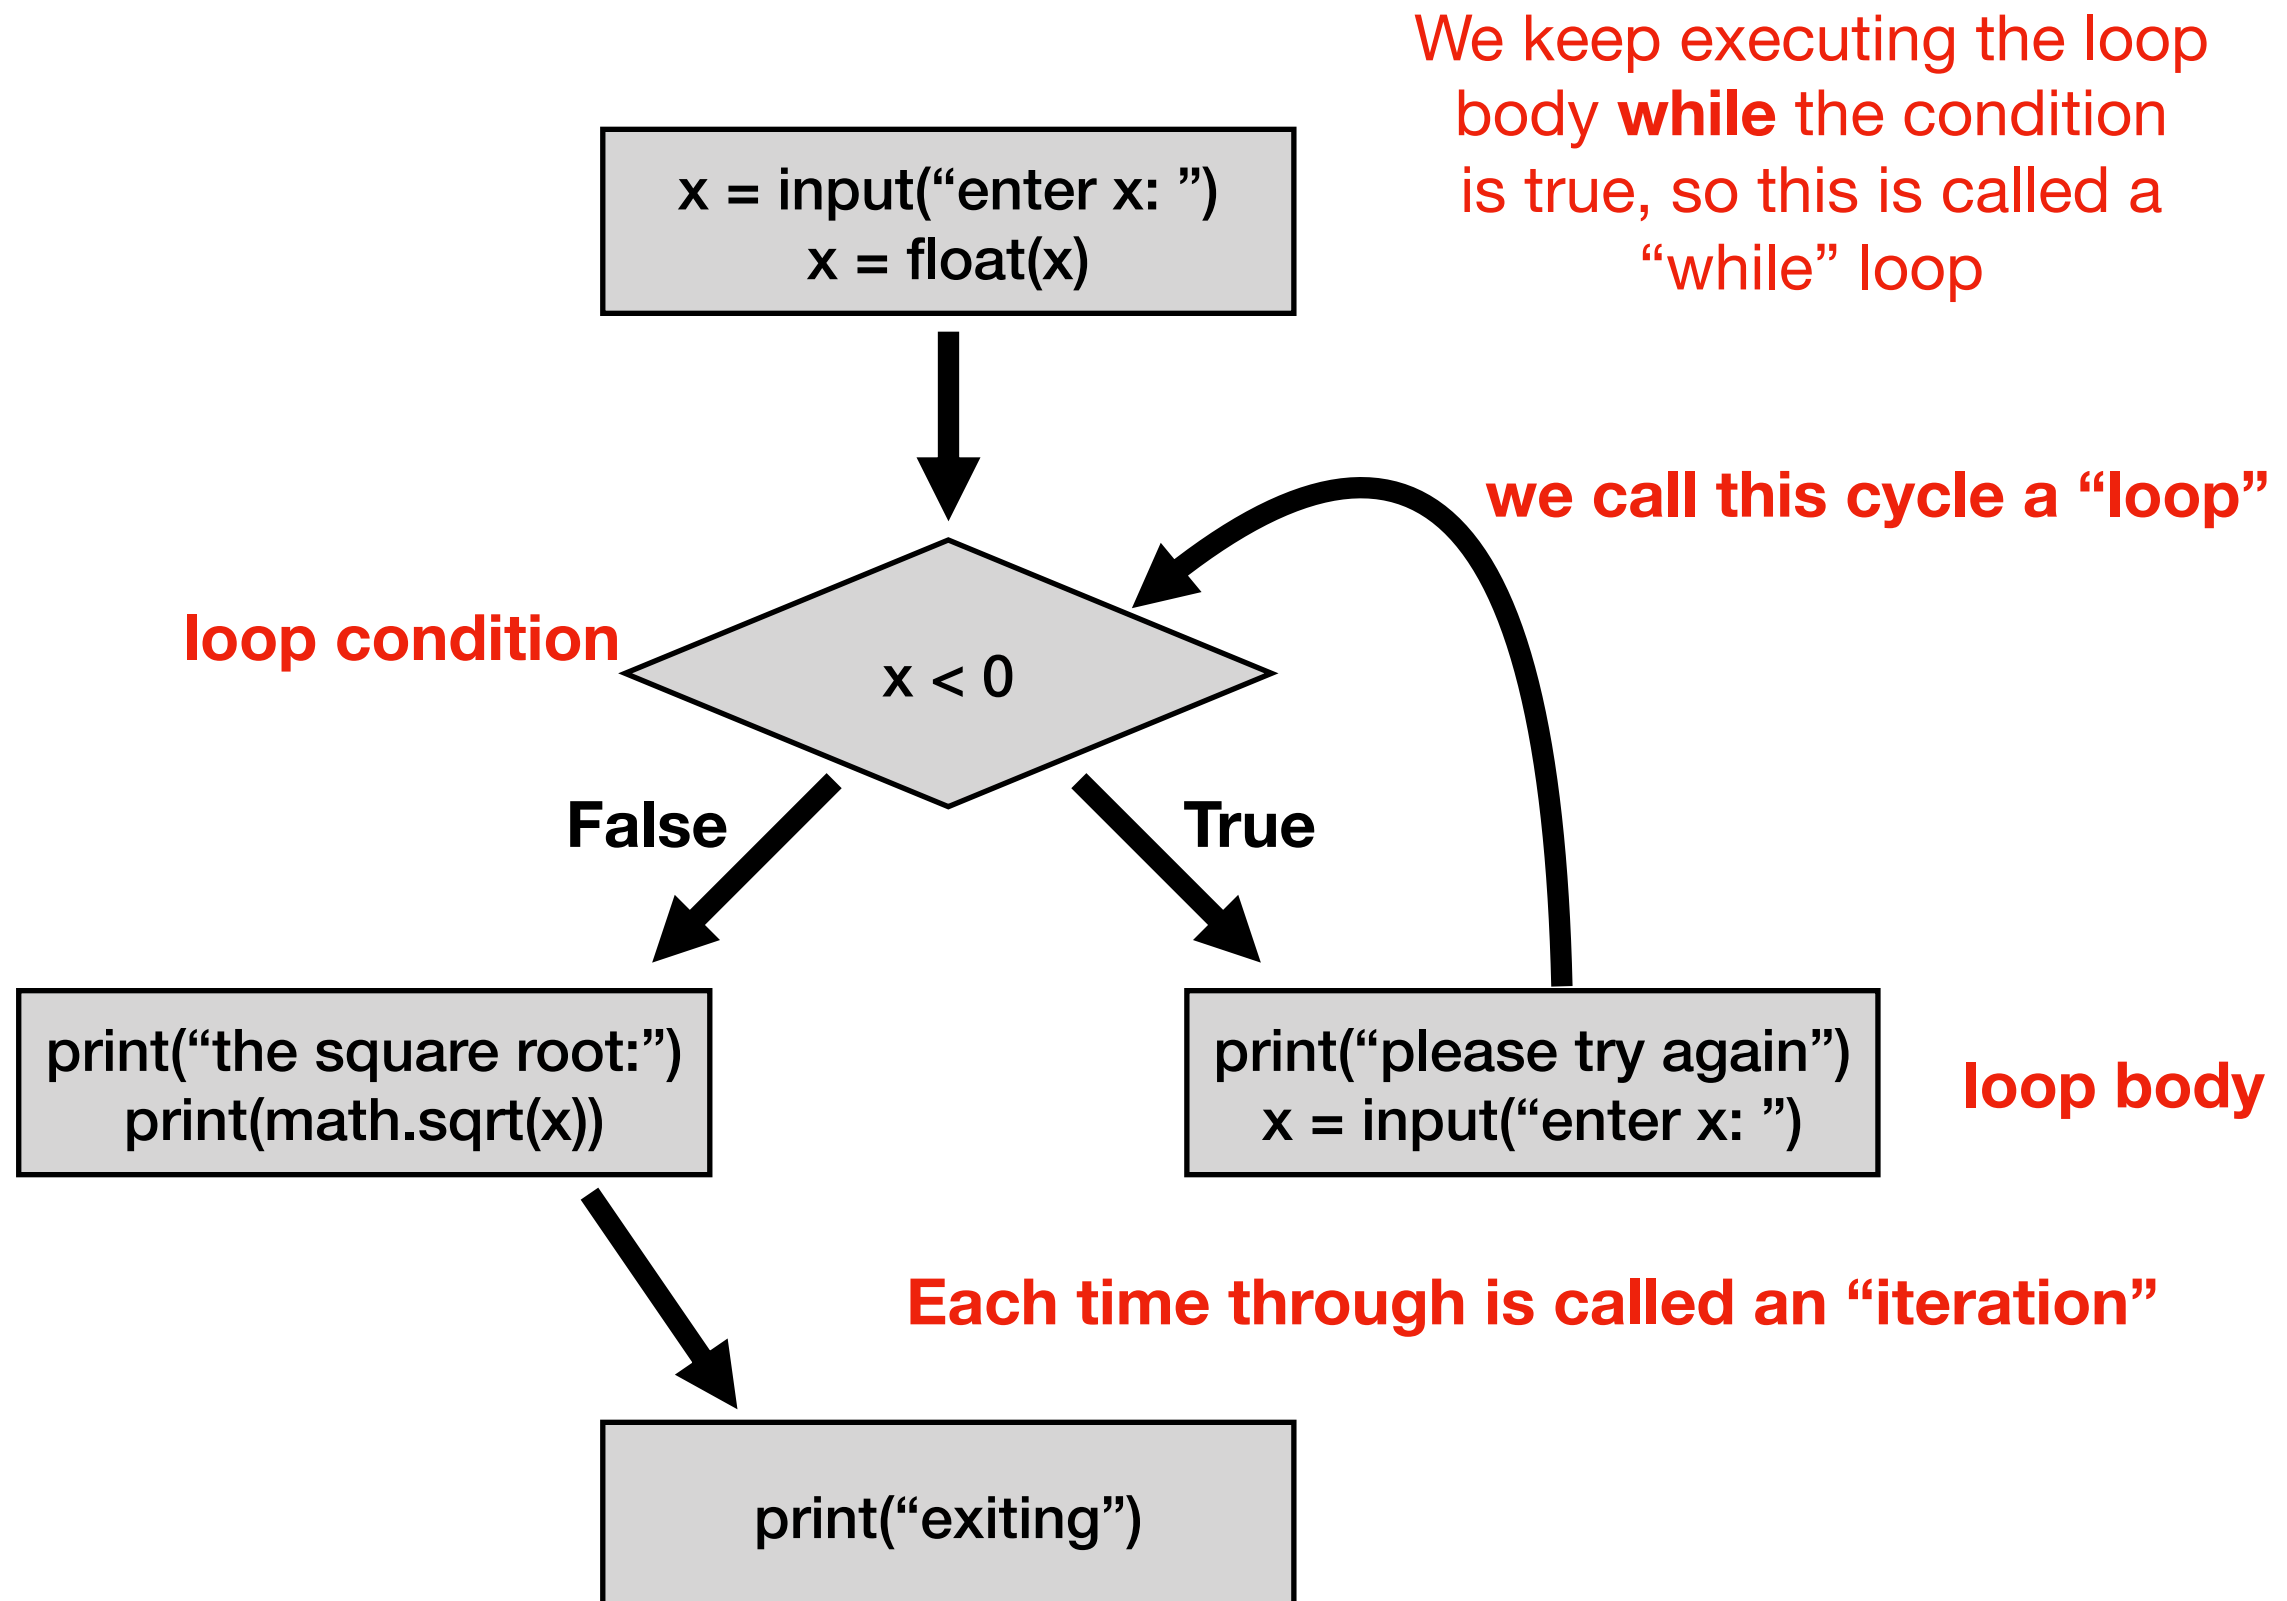
Control Flow Diagrams ⬅

Basic syntax for "while"

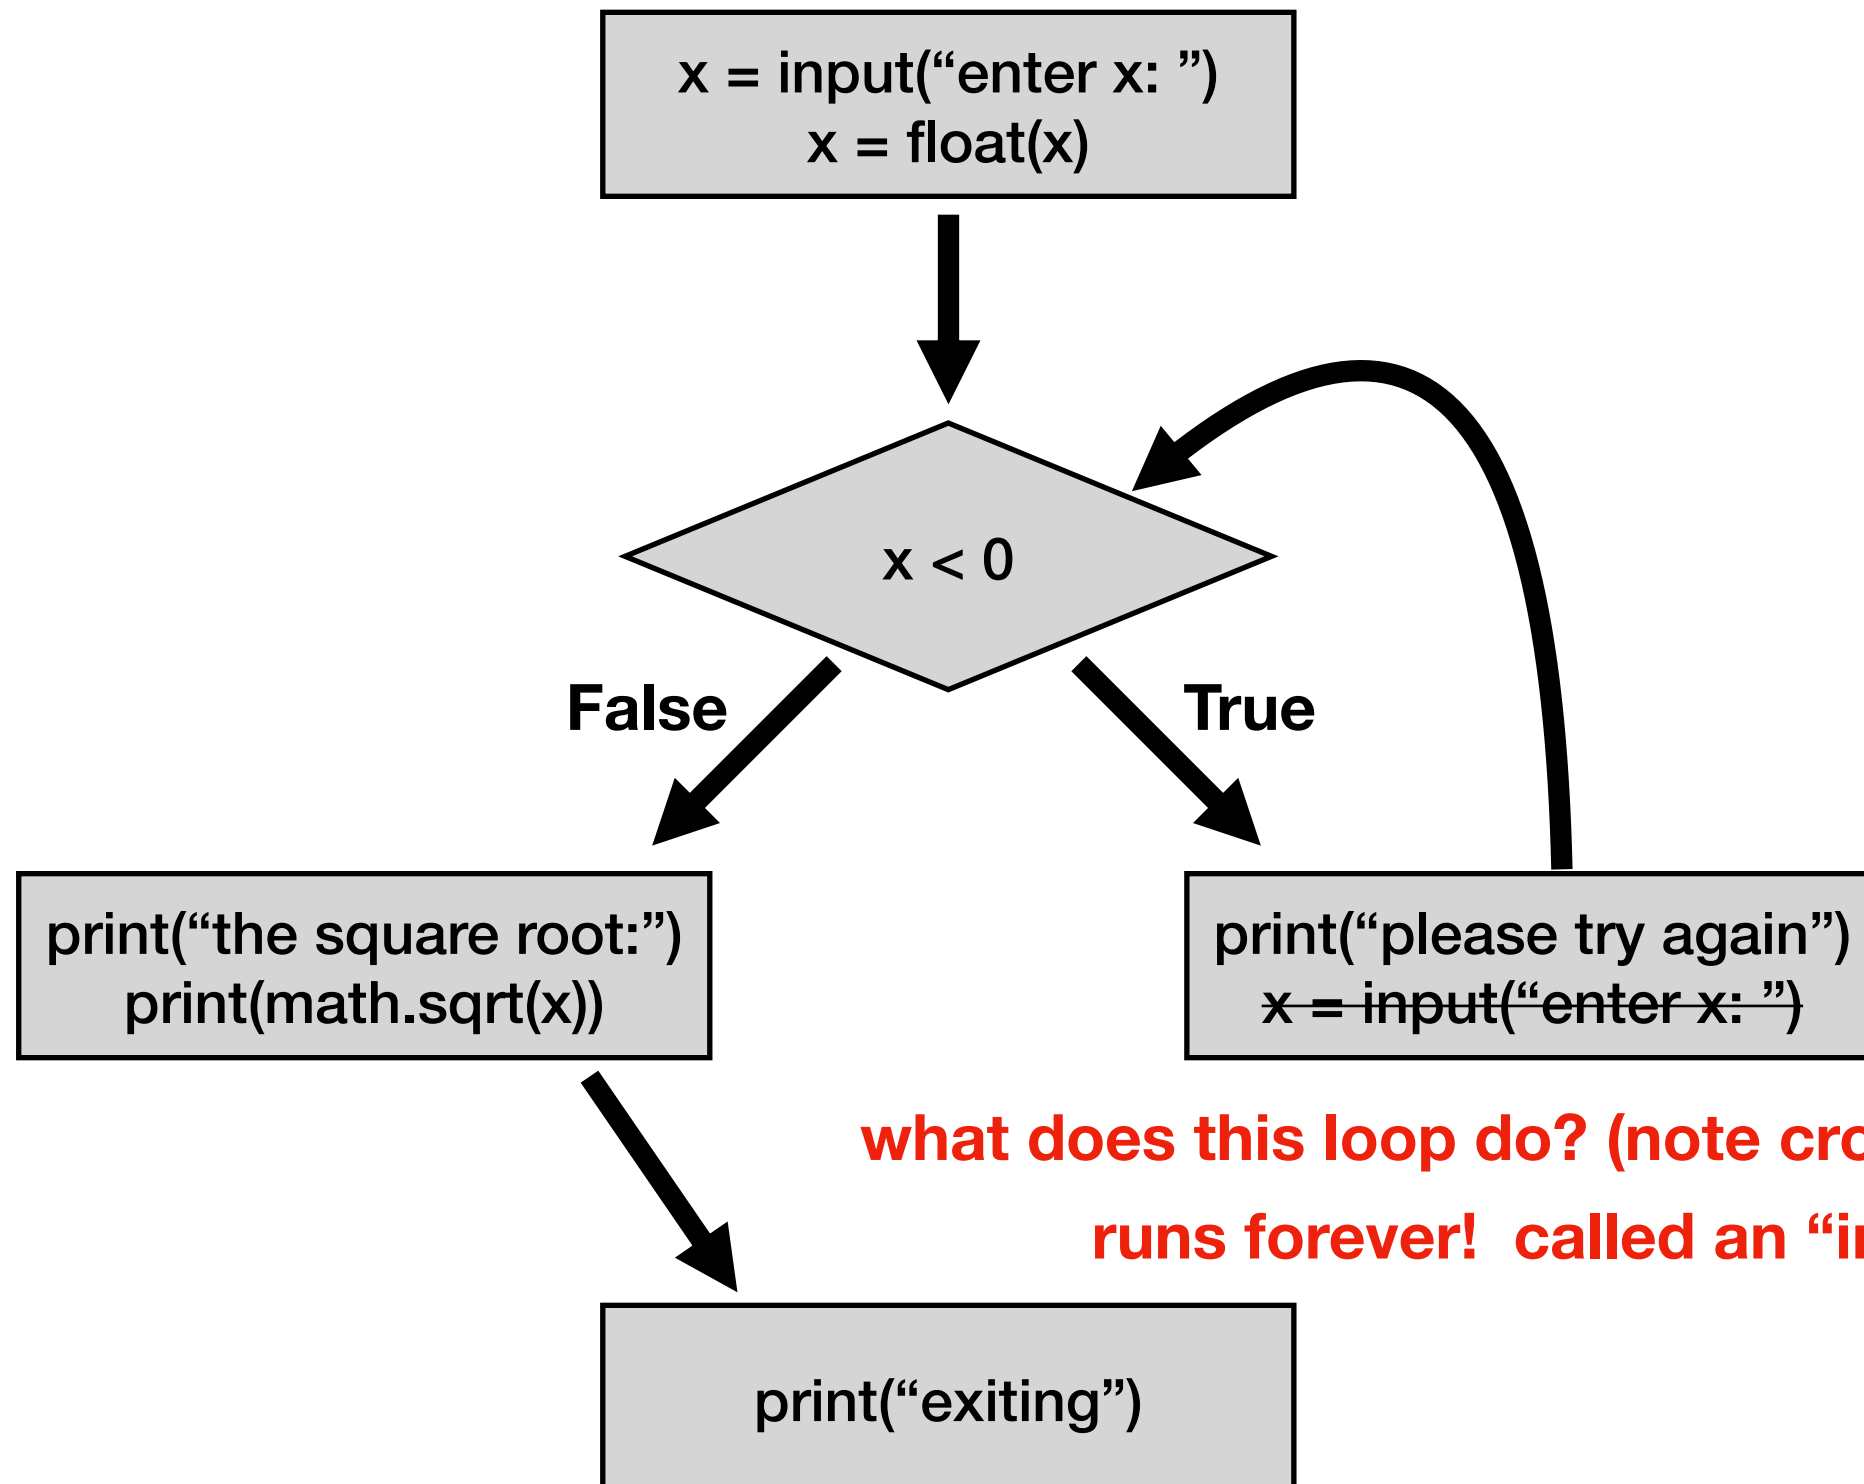*Demos*

Control Flow Diagrams: "if"

```
x = input("enter x: ")
x = float(x)
```

x < 0

False

True

```
print("the square root:")
print(math.sqrt(x))
```

```
print("need a positive")
```

```
print("exiting")
```

Wouldn't it be nice if we could go back and give the user a second chance?

Control Flow Diagrams: "while"

x = input("enter x: ")
x = float(x)

We keep executing the loop body **while** the condition is true, so this is called a "while" loop

we call this cycle a "loop"

loop condition

x < 0

False

True

print("the square root:")
print(math.sqrt(x))

print("please try again")
x = input("enter x: ")

loop body

Each time through is called an "iteration"

print("exiting")

Control Flow Diagrams: "while"

x = input("enter x: ")
x = float(x)

x < 0

False   **True**

print("the square root:")
print(math.sqrt(x))

print("please try again")
~~x = input("enter x: ")~~

print("exiting")
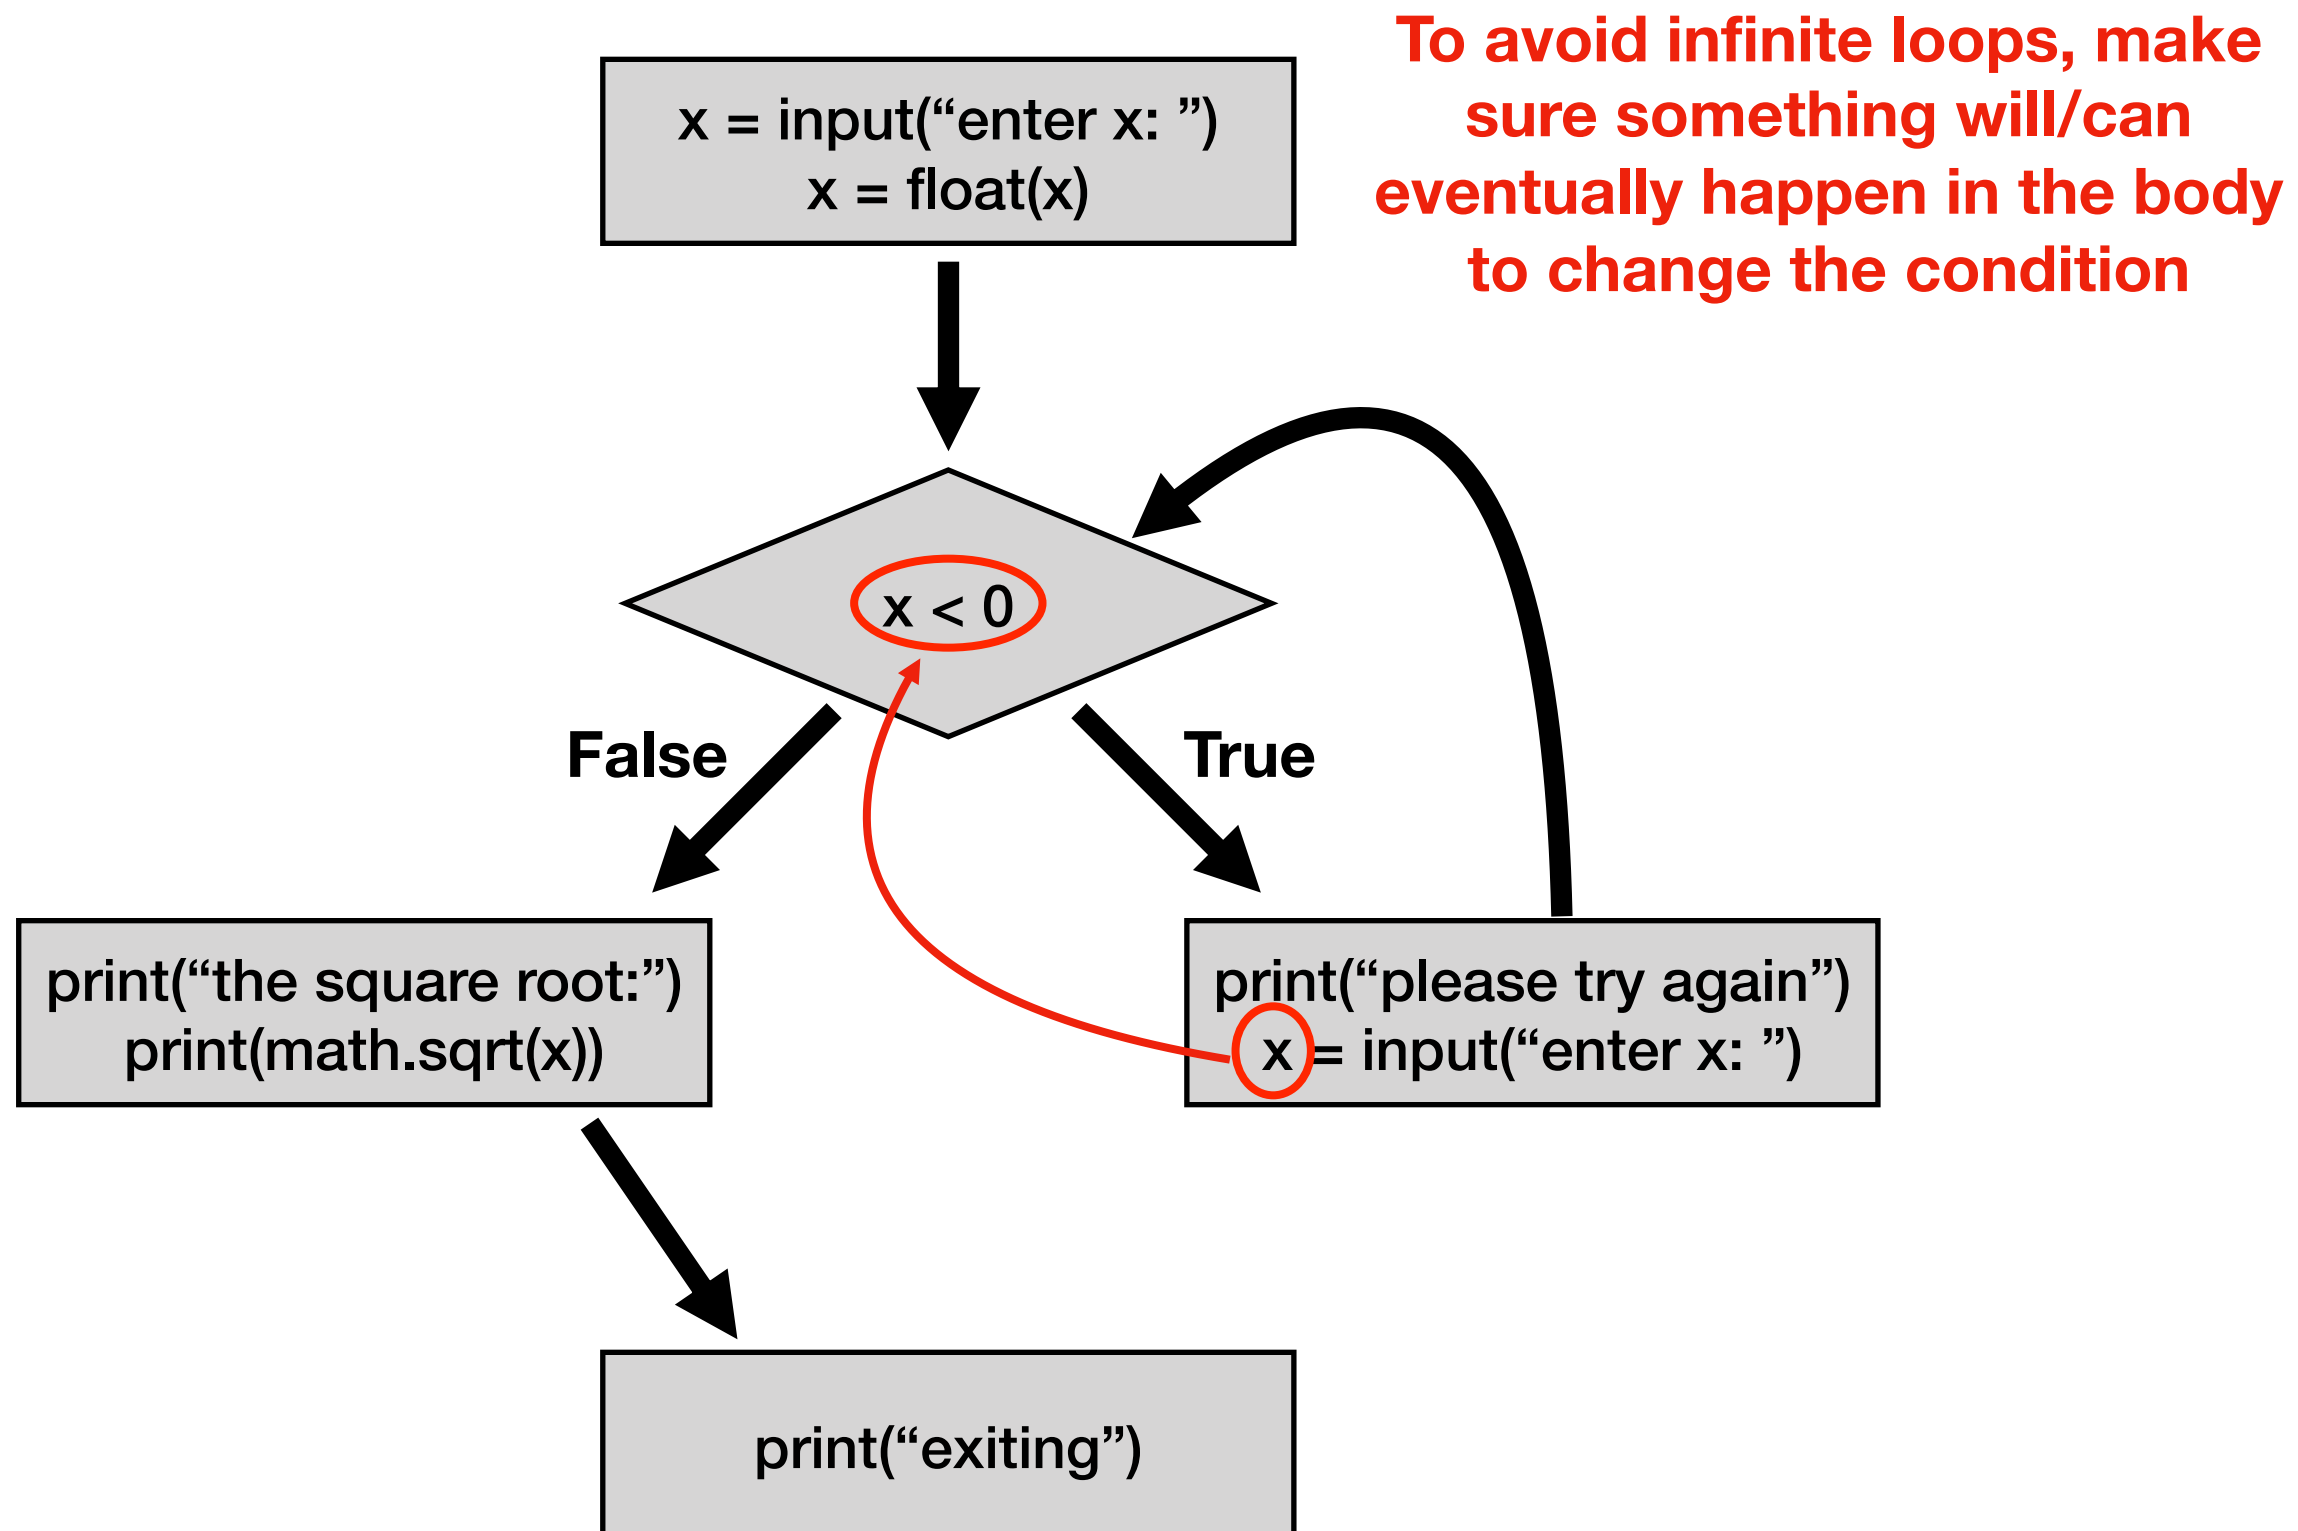
what does this loop do? (note crossed out line)

runs forever! called an "infinite loop"

Control Flow Diagrams: "while"

x = input("enter x: ")
x = float(x)

To avoid infinite loops, make sure something will/can eventually happen in the body to change the condition

x < 0

False

True

print("the square root:")
print(math.sqrt(x))

print("please try again")
x = input("enter x: ")

print("exiting")

Today's Outline

Control Flow Diagrams

Basic syntax for "while" ⬅
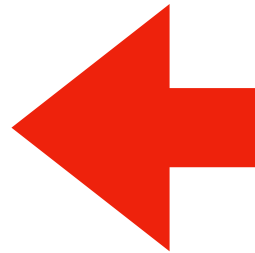
Demos

Syntax

```
x = int(input("enter x: "))

if x < 0:
    x = int(input("please try again: "))
```
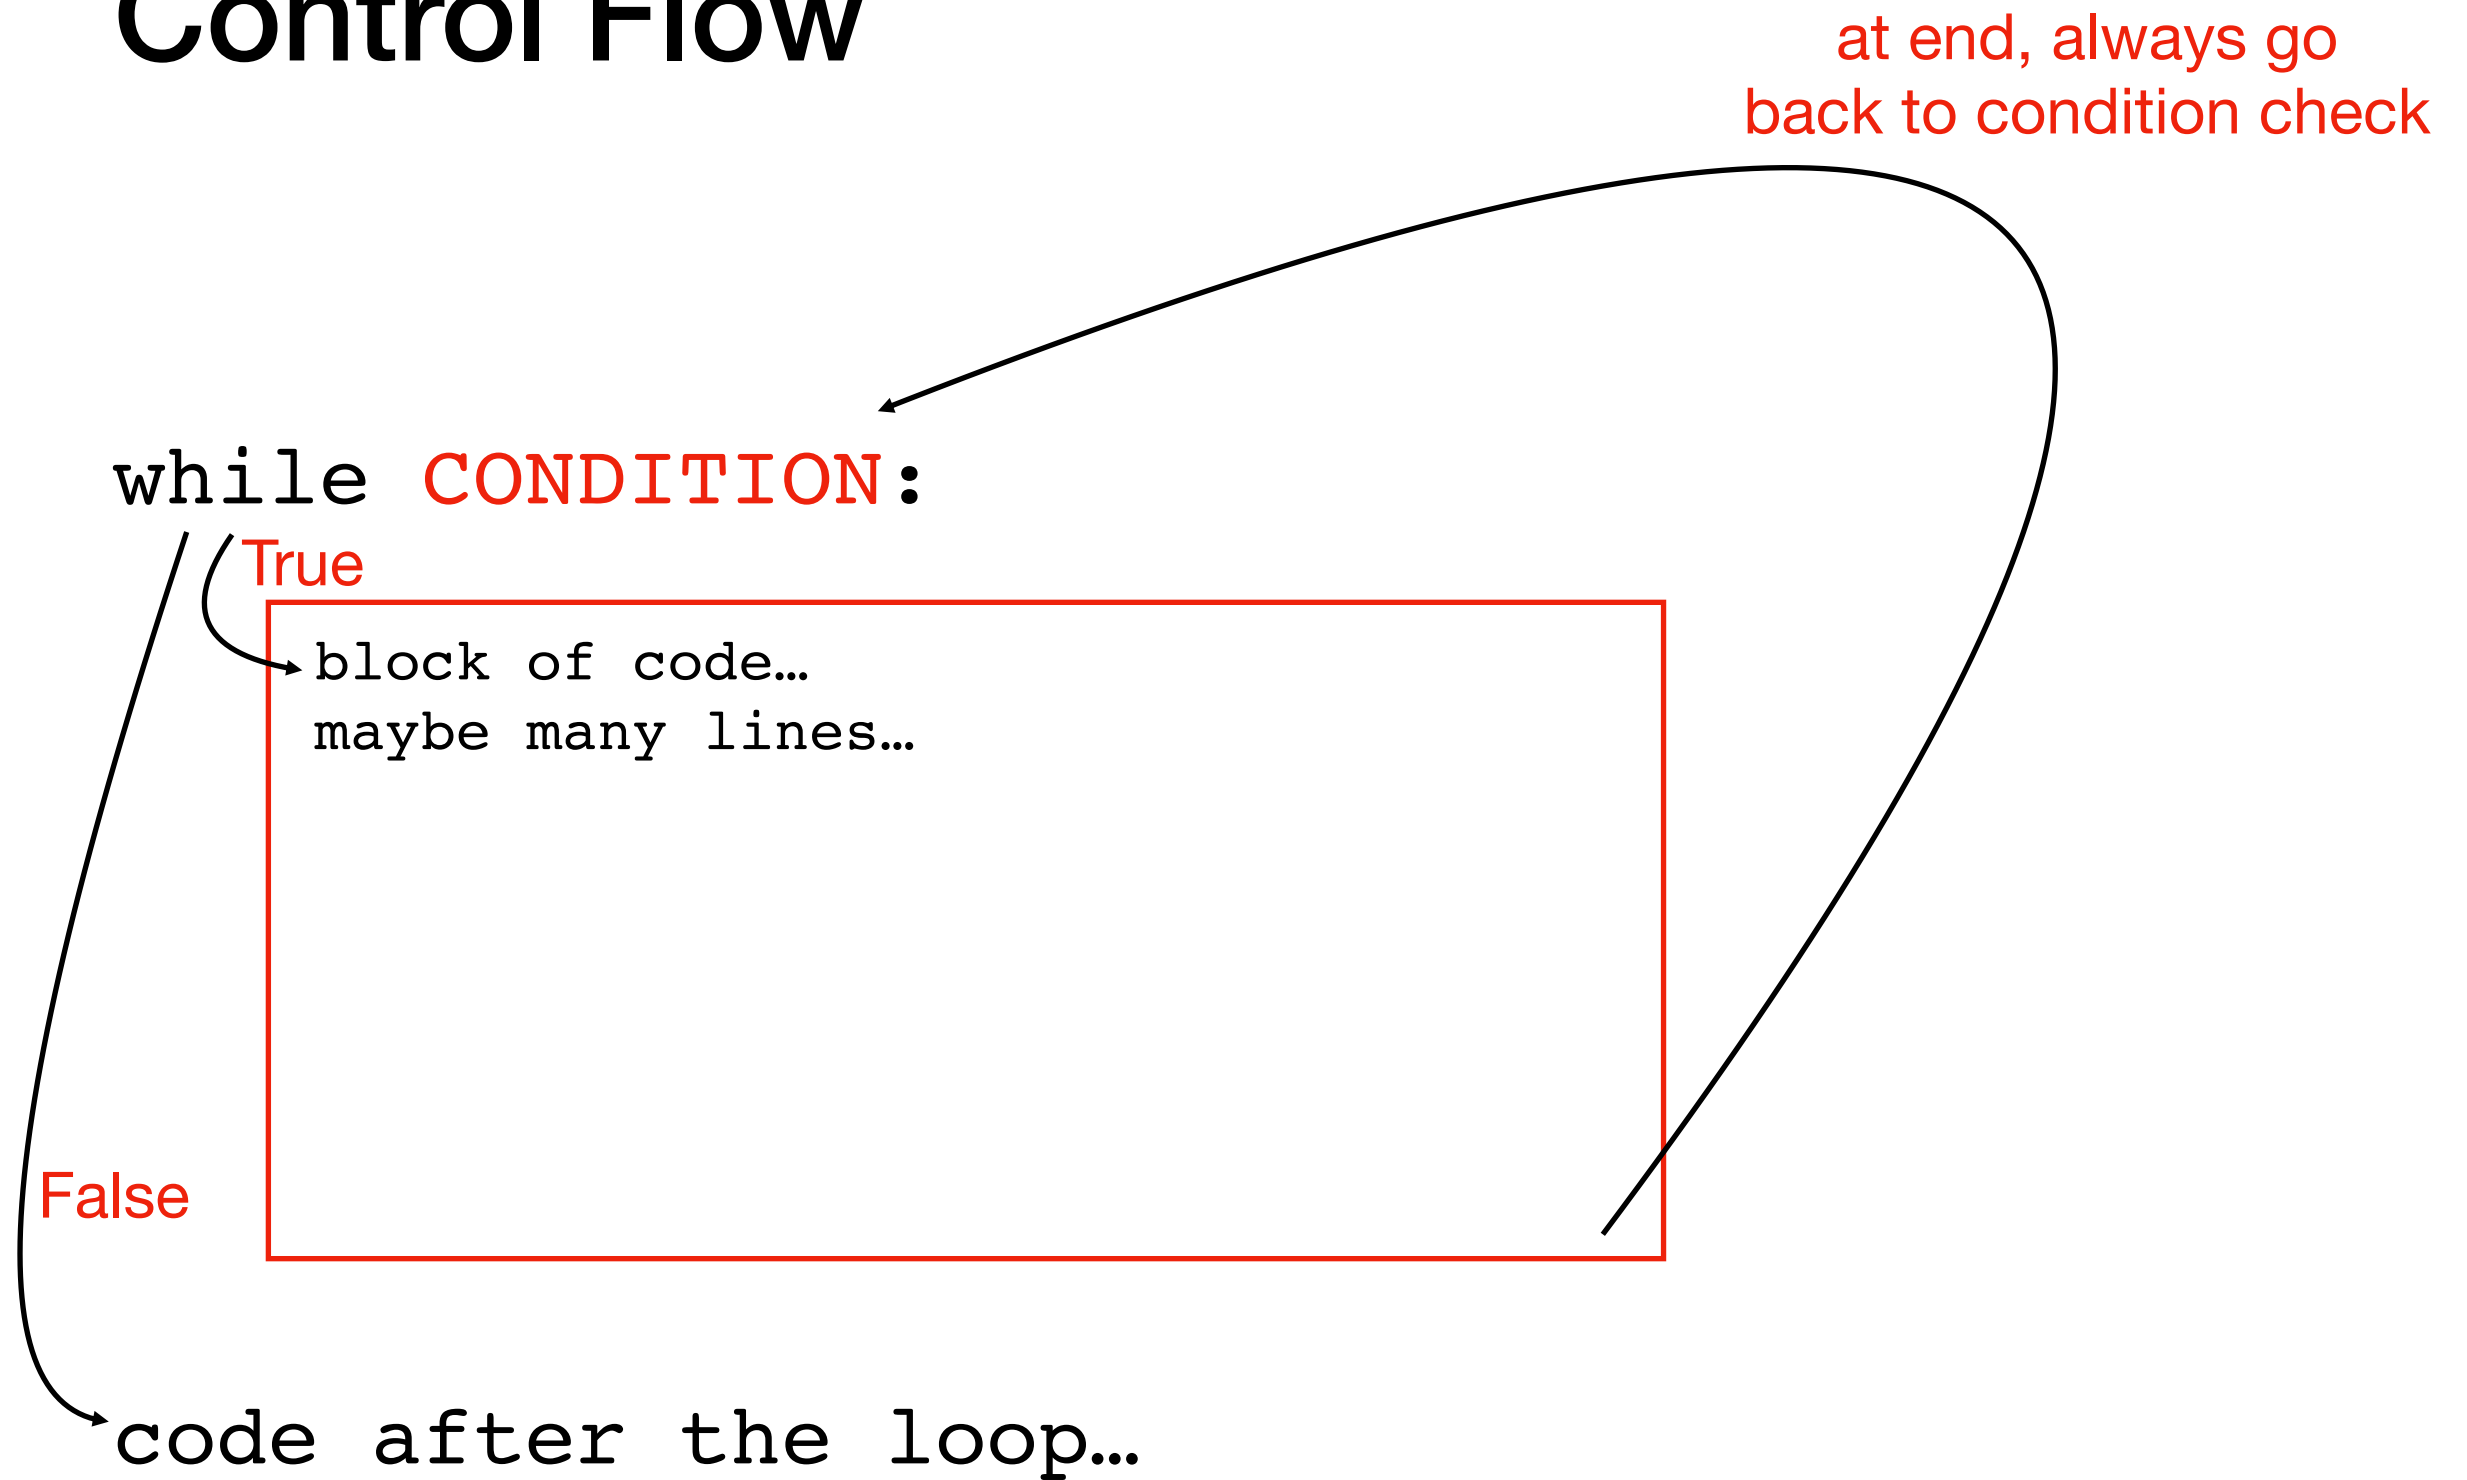
Syntax for "if"

Syntax

```
x = int(input("enter x: "))

while x < 0:
    x = int(input("please try again: "))
```

Syntax for "while loop" is just like for "if", just replace "if" with "while"

this example gives user an arbitrary number of tries
until they get it right

Control Flow

```
while CONDITION:
        True
            block of code…
            maybe many lines…




    False


code after the loop…
```

Steps to follow

Whenever you write a while loop, keep these in mind:

1. **Initialize** your loop condition variable

2. a) **Update** your loop condition variable in loop body

   b) Make **progress towards** eventually turning your loop condition to **False**

Congrats!

You now understand the 4 key **Flow of Execution** ideas,
in the context of Python.

1. **generally, proceed forward, one step at a time**

2. sometimes go run a "mini program" somewhere else before continuing to the next line
•This is a function call

3. sometimes skip forward over some lines of code
•Conditional or while loop, when the condition is false

4. sometimes go back to a previous line of code
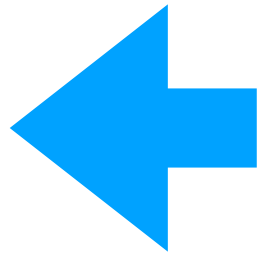•while loop. When at the end of body, always go back to condition

three primary exceptions to the general case (1)

Today's Outline

Control Flow Diagrams

Basic syntax for "while"

Demos

Demo: Countdown Timer

use `time.sleep(1)`

```
how many seconds? 5
5
4
3
2
1
DING DING DING DING DING!
```

Demo: Maximum (Finding the Peak)

where does this curve peak?
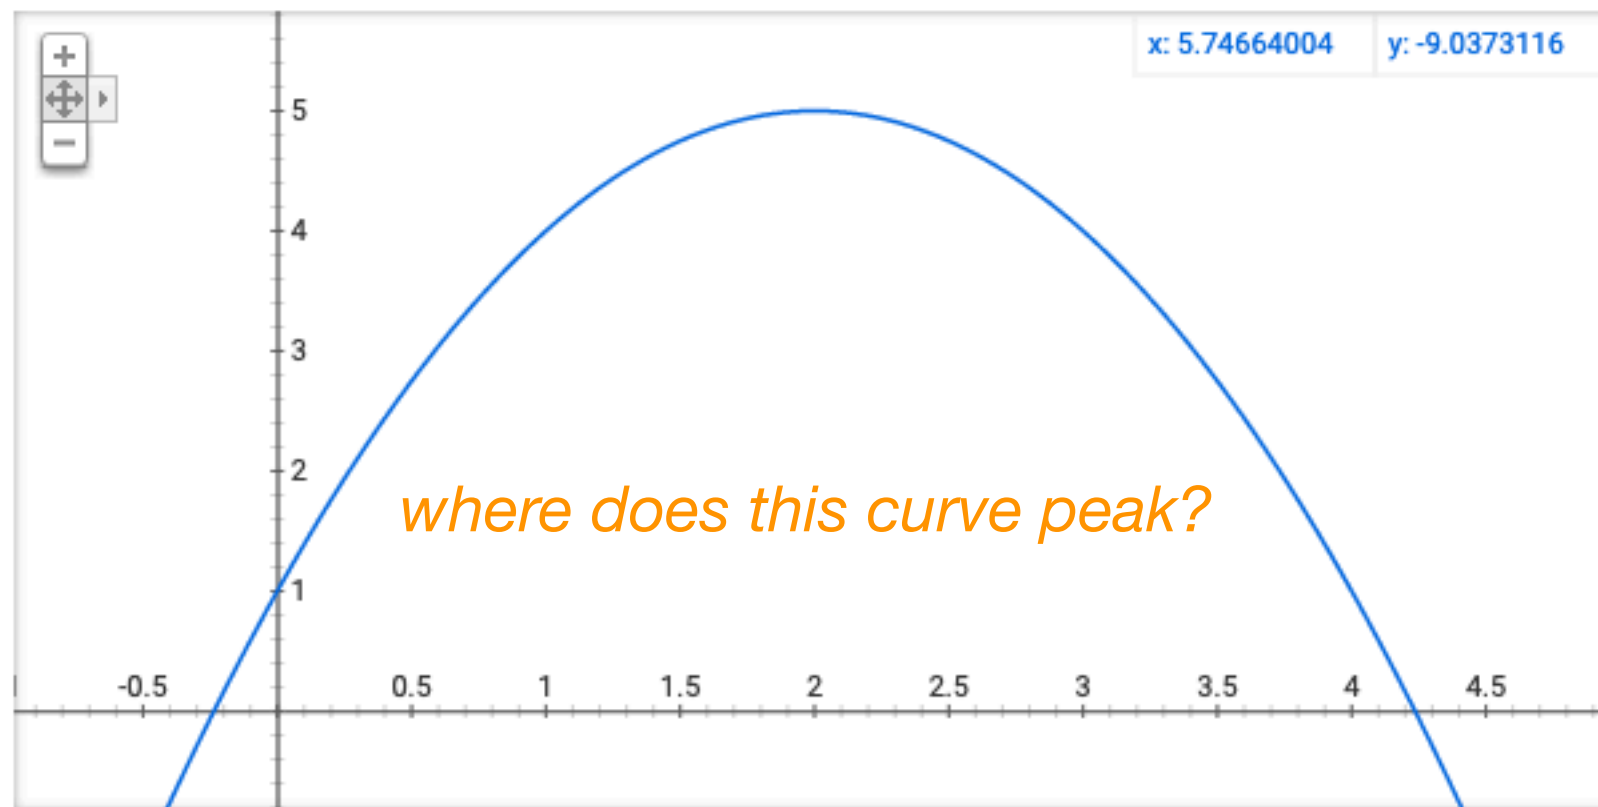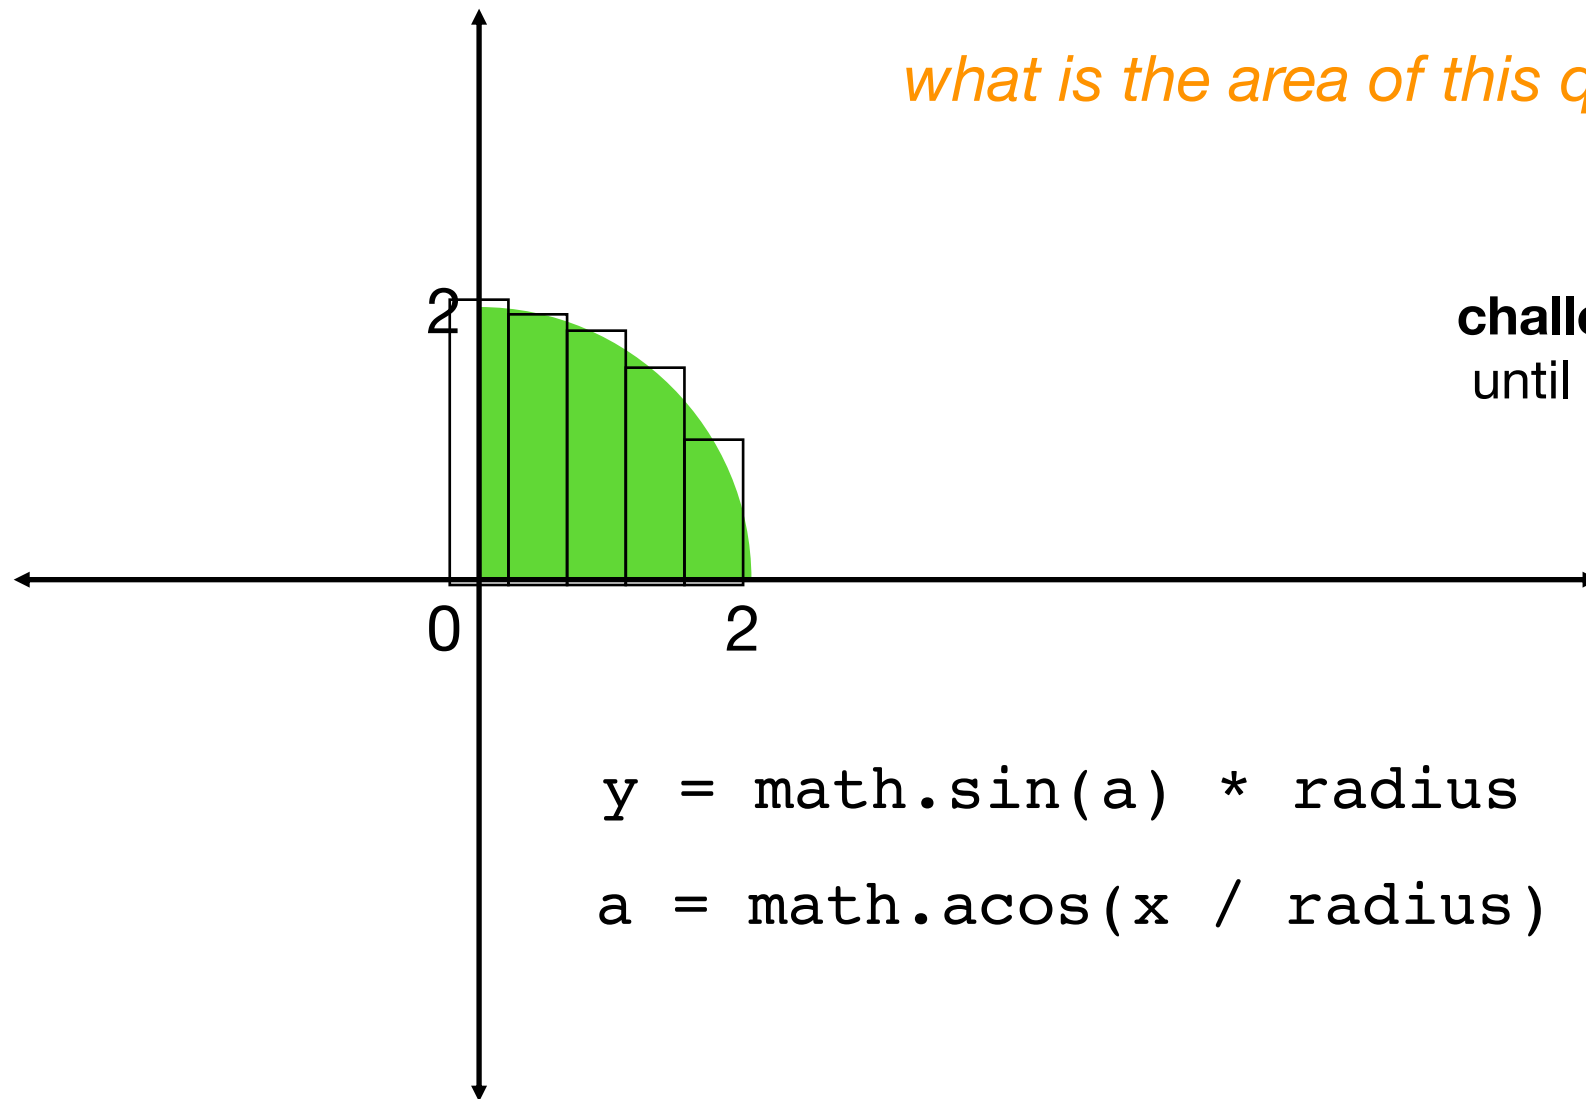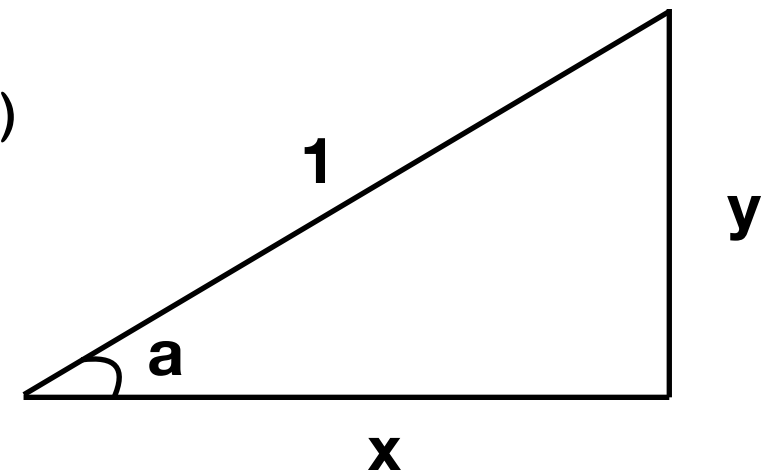
Demo: Integration (Finding the area)

what is the area of this quarter circle?

challenge: keep using narrower slices
until it doesn't make much difference

```
y = math.sin(a) * radius

a = math.acos(x / radius)
```

Demo: Prime Finder

```
Here are a "few" primes:
2
3
5
7
11
13
... runs forever ...
```

Demo: Battleship

columns

rows

. . . .
. . . .
. . *+*** . . .
. . . .
. . . . * .
. . . . * .
. . . .
. . . . * . . . .
. . . . * . . . .
. . . . * . . . . . .

show where ship(s) are after guess

```
guess and ship: +
      just ship: *
guess and miss: −
     blank spot: .
```