



Maximum Extractable Value (MEV) Mitigation Approaches in Ethereum and Layer-2 Chains: A Comprehensive Survey

*ZEINAB ALIPANAHLOO, ABDELHAKIM SENHAJI HAFID
AND KAIWEN ZHANG (Member, IEEE 2024)*


MAGISTRELLO CAMILLA (4512554)

MITIGATION STRATEGIES

Two major categories:

Prevention/Reduction: try to eliminate or reduce MEV opportunities.

Side-effects Reduction: try to reduce the negative effects.

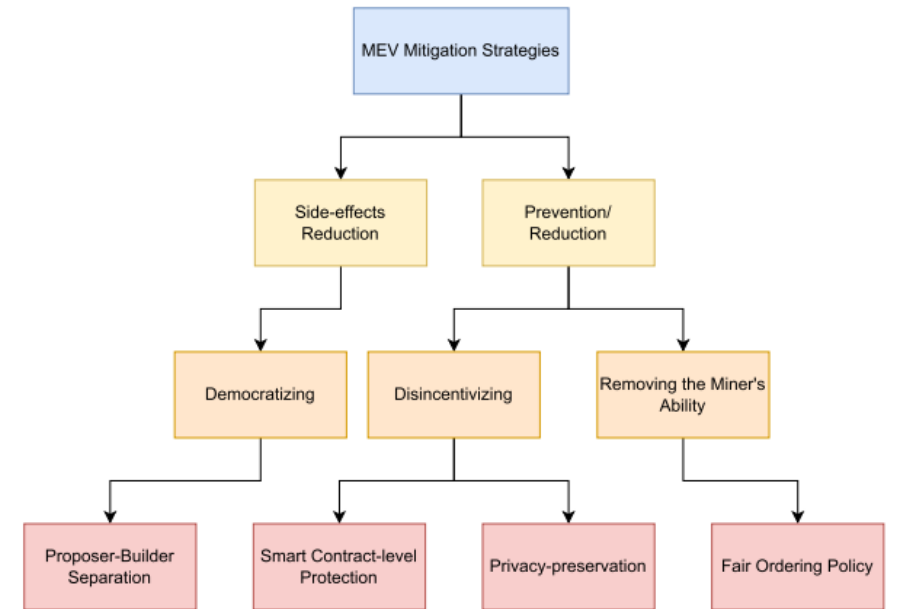

PREVENTION/REDUCTION: FAIR ORDERING POLICIES

If the problem arise because sequencer can reorder transaction then precise rule must be introduce.

Problems:

- the sequencer could still censor or delay transactions;
- the sequencer could leak information to external bots;
- in systems with a single sequencer, a strong level of trust is still required

PREVENTION/REDUCTION: FAIR ORDERING POLICIES

Single Sequencer

First Come First Serve policy:

- transactions are ordered according to their arrival time;
- whoever arrives first is processed first.

New problems emerge:

- Latency wars
- Spam attacks

PREVENTION/REDUCTION: FAIR ORDERING POLICIES

TimeBoost

Each transaction receives a score calculated using:

- a timestamp
- an economic bid

$$S(t_i, b_i) = \pi(b_i) - t_i$$

t_i = transaction arrival timestamp

b_i = bid (the tip paid by the user to gain priority)

$\pi(b_i)$ = bid priority function


PREVENTION/REDUCTION: FAIR ORDERING POLICIES

Decentralized Sequencing

Several nodes collaborate to decide transaction ordering instead of relying on a single operator.

Themis and Wendy: temporary leaders or synchronized timestamp across nodes

Require significant coordination and increase complexity and network overhead.

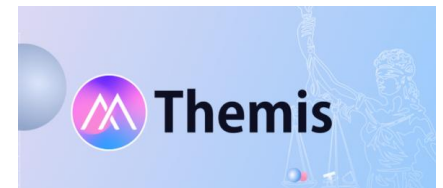

PREVENTION / REDUCTION: PRIVACY-PRESERVING METHODS

Transaction contents are hidden until the ordering has already been decided.

Threshold Encryption

- Transactions are encrypted
- Decryption key is distributed among multiple parties

Delay Encryption

- The transaction remains encrypted for a certain period of time
- Can only be obtained after solving a computational problem

Trusted Execution Environments

- Transactions are processed inside protected enclaves
- Published only after execution

PREVENTION / REDUCTION: SMART CONTRACT SOLUTIONS

Reduce the possibility of front-running directly inside applications.

Two main families:

- Entirely **on-chain** and remains inside smart contracts.
- **Off-chain** components connected to the blockchain ecosystem. Some important example are CoW Swap and Fair MM.



SIDE-EFFECT REDUCTION: PROPOSER-BUILDER SEPARATION



WHO BUILDS
THE BLOCK



WHO PROPOSES IT
TO THE NETWORK

The most important implementation today is **MEV-Boost**
In this model:

- searchers identify MEV opportunities;
- builders construct blocks;
- relays verify blocks;
- validators choose which block to propose.



Reduces the power of individual validators



Introduces new centralization risks around
relays and builders



CONCLUSION

Every approach introduces trade-offs between:

- ▶ Decentralization
- ▶ Privacy
- ▶ Latency
- ▶ Complexity
- ▶ Scalability

MEV cannot be completely eliminated, because it emerges directly from the structure of blockchains based on transaction ordering.