Module2 - R Markdown Document 1

Julián-Caballero, C. Camilo. M. Sc. 13 de febrero de 2019

This is a level 1 header

R Markdown

This is a level 3 header

This is an R Markdown document. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see http://rmarkdown.rstudio.com.

Here is a link to GOOGLE

Here is a word in **bold** and another word in **bold**.

Here is a word in *italics* and another word in *italics*.

When we compile our document, we are using the rmarkdown package.

Here are some example R commands:

2+2

mean(c(1,2,3,4,5))

Here is an example of a non-numbered list:

- Breakfast
 - food
 - * eggs
 - * toast
 - * bacon
 - drink
 - * apple juice
- Lunch
 - taco
- Dinner
 - baked chicken
 - broccoli
 - rice

Here is an example of a blockquote:

This is a block quote. This paragraph has two lines.

- 1. This is a list inside a block quote.
- 2. Second item.

Here is an example of a nested blockquote:

This is a block quote. This paragraph has two lines.

This text is nested

Here is an example of code in a blockquote:

```
2+2 mean(c(1,2,3,4,5))
```


When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document. You can embed an R code chunk like this:

summary(cars)

```
##
                          dist
        speed
##
    Min.
            : 4.0
                    Min.
                            :
                               2.00
    1st Qu.:12.0
                    1st Qu.: 26.00
##
##
    Median:15.0
                    Median : 36.00
##
    Mean
            :15.4
                    Mean
                            : 42.98
##
    3rd Qu.:19.0
                    3rd Qu.: 56.00
            :25.0
                            :120.00
##
    Max.
                    Max.
```


Including Plots

You can also embed plots, for example:

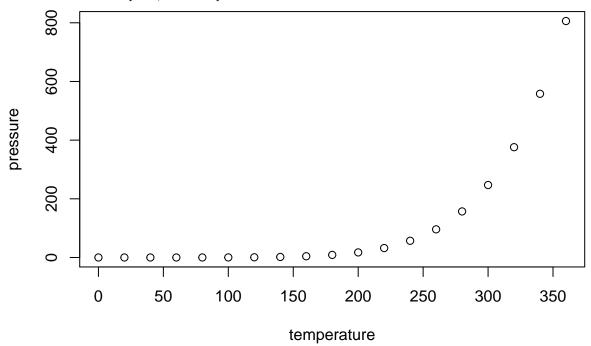

Note that the echo = FALSE parameter was added to the code chunk to prevent printing of the R code that generated the plot.

plot(pressure)

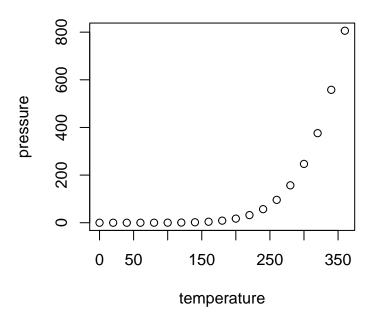

Insert Tables

```
knitr::kable(head(cars), caption = "Top 6 Rows of Cars Dataset")
```

Table 1: Top 6 Rows of Cars Dataset

dis	speed
6	4
10	4
4	7
22	7
16	8
10	9