
## Local debugging (All in the same JVM process)

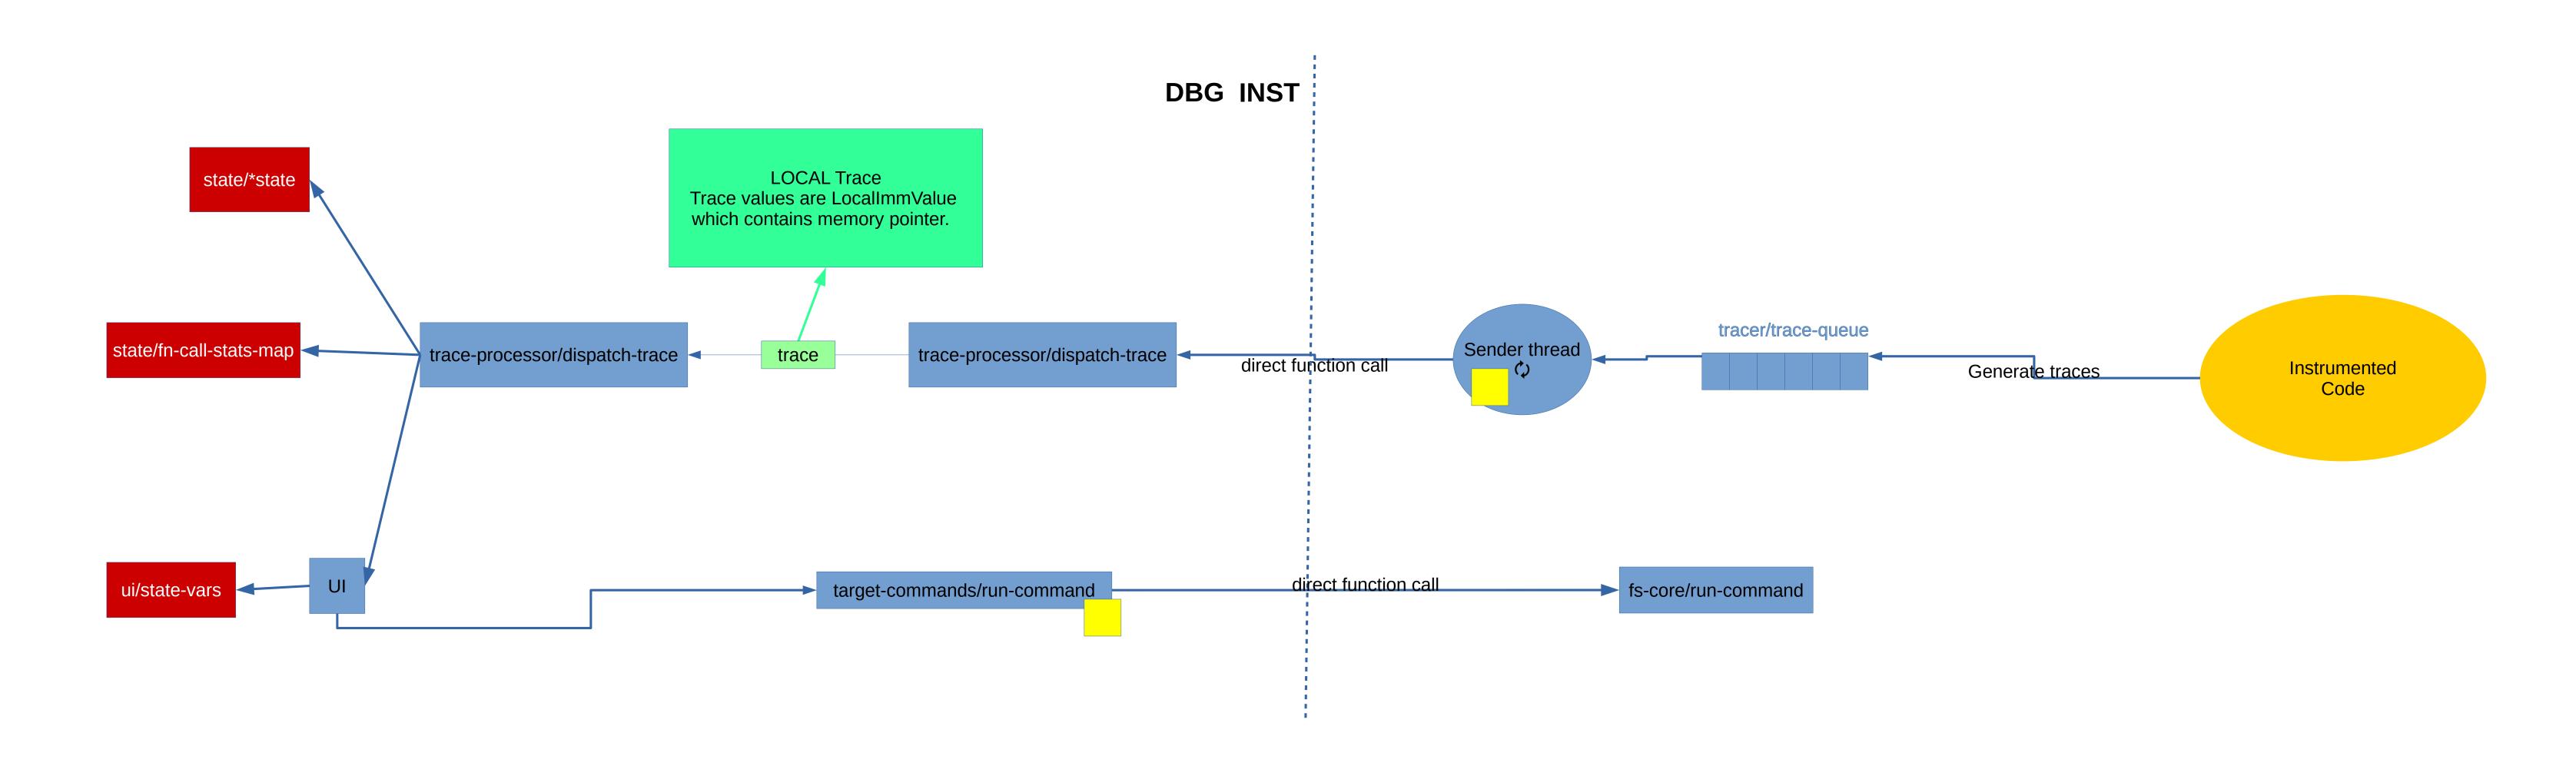

## Remote debugging (two processes) REMOTE Trace Trace values are RemoteImmValue which contains a value id. DBG Referenced values Trace The trace keeps a pointer and the values remain stored in \*values-references. state/\*state trace-processor/dispatch-trace -: trace trace-processor/remote-dispatch-trace state/fn-call-stats-map tracer/trace-queue Instrumented Code Generate traces process-comand-response \*pending-command-callbacks trace-types/\*values-references target-commands/run-command :get-remote-value

fs-core/run-command