

CANDY DIALOGUE ENGINE


Test Scene

1.1.0

The **Test_Scene.tscn** can be used to quickly test dialogues. It consists of nothing more than a node with a script attached.

The script is designed such that when the scene is run, it will load the dialogue in the **test_dialogue.txt** file into the dialogue engine, then start the engine to run it.

The script provides four exported variables, to allow you to configure what dialogue is loaded:

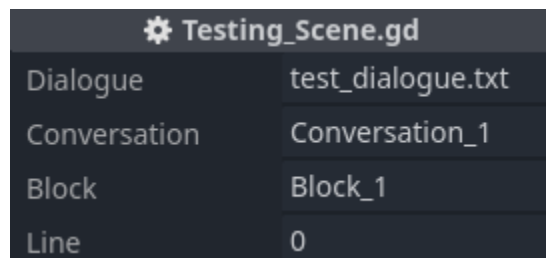

⚙ Testing_Scene.gd	
Dialogue	test_dialogue.txt
Conversation	Conversation_1
Block	Block_1
Line	0

Dialogue → The dialogue file to load

Conversation → The Conversation to start at.

Block → The Block to start at.

Line → The Line to start at (set this to 0 to start at the first line in a Block).

The scene requires you to have correctly setup the 'candy_ui' autoload. If you use another prefix or you want to use another dialogue engine instance, you'll need to edit the script accordingly.

The scene is otherwise empty. No elements of your game (i.e. anything not inside the Candy_UI) will be displayed if you run the scene directly.

This also means that some commands, such as control commands or the various §CS commands, may not work and may even cause crashes.

To solve this, you have two options:

1. Add game elements to the UI scene (make sure the paths in the Candy_Engine.gd script match).
2. Add the test scene to the game scene you want to test, and configure your game scene to call the **test_start()** function in the test scene's script. You'll also need to disable the test scene's

`_ready()` function, so it doesn't start dialogue before everything else has finished loading.
Run the game scene instead of the test scene.

Option 2 is probably the easiest, but will require you to re-edit the game scene later to remove the test scene.

If your game scene is simple, Option 1 might be simple enough to implement, and would keep your game scenes clean.