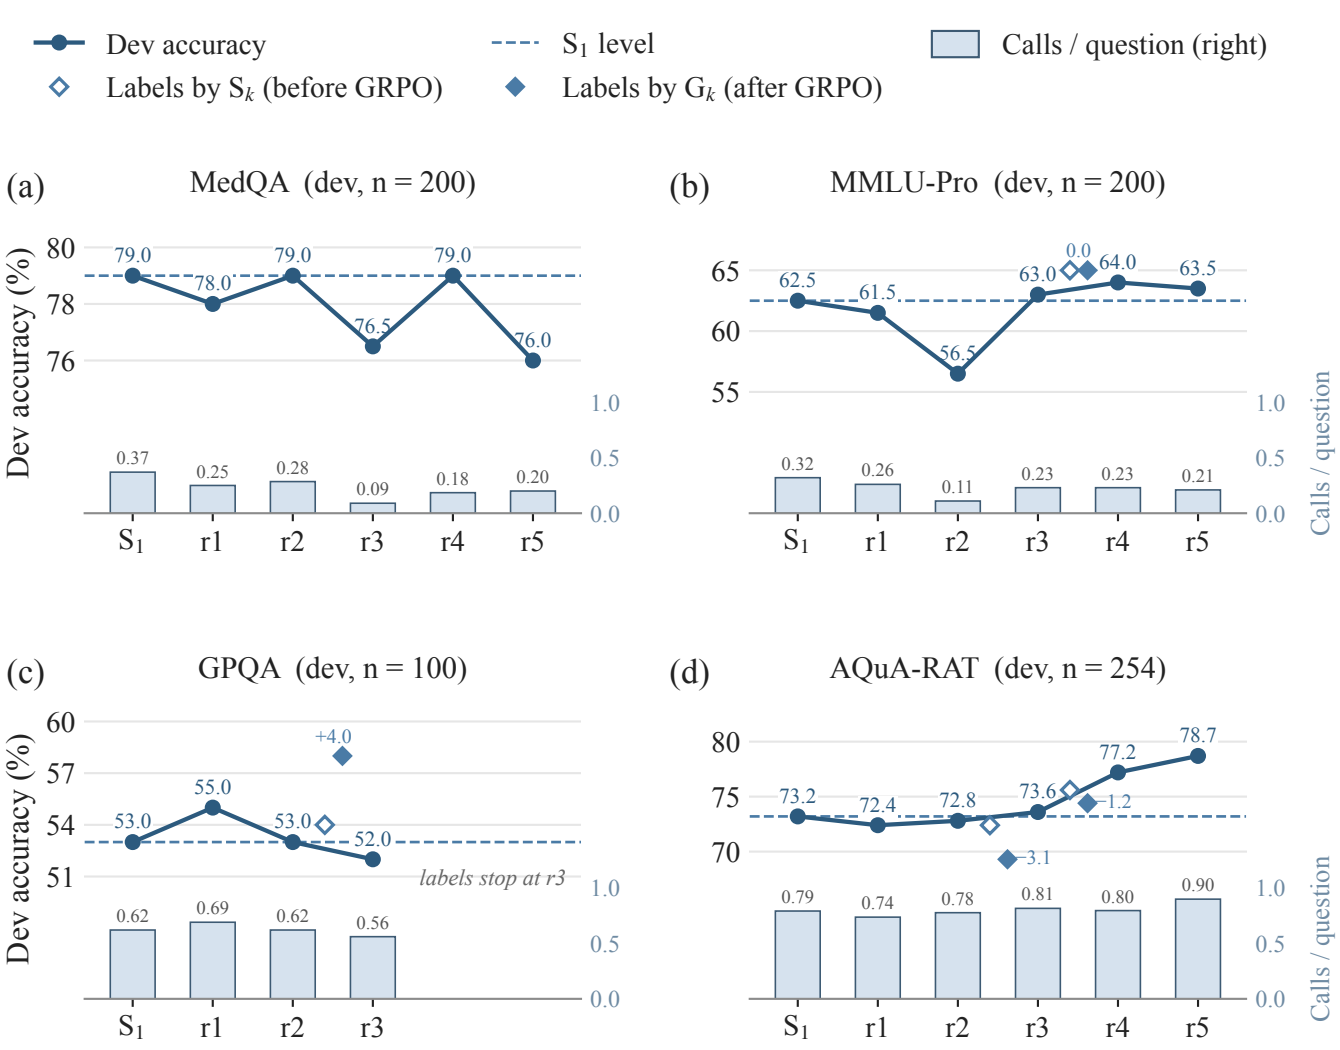



Dev pools (MedQA/MMLU-Pro 200, GPQA 100, AQuA 254). Each point: SFT from $S_1$ on one round's labels only.
Hollow/filled pairs: labels collected by $S_k$ vs $G_k$ (after GRPO), placed beside chain round $r_{k+1}$ (built from $S_k$'s labels).
Small number next to a pair: $G_k - S_k$ accuracy. Bars: advisor calls per question (right axis).
Rounds: r1 = the static arm's data; $r_k$ = labels re-collected by $S_{k-1}$. GPQA labels stop at r3.