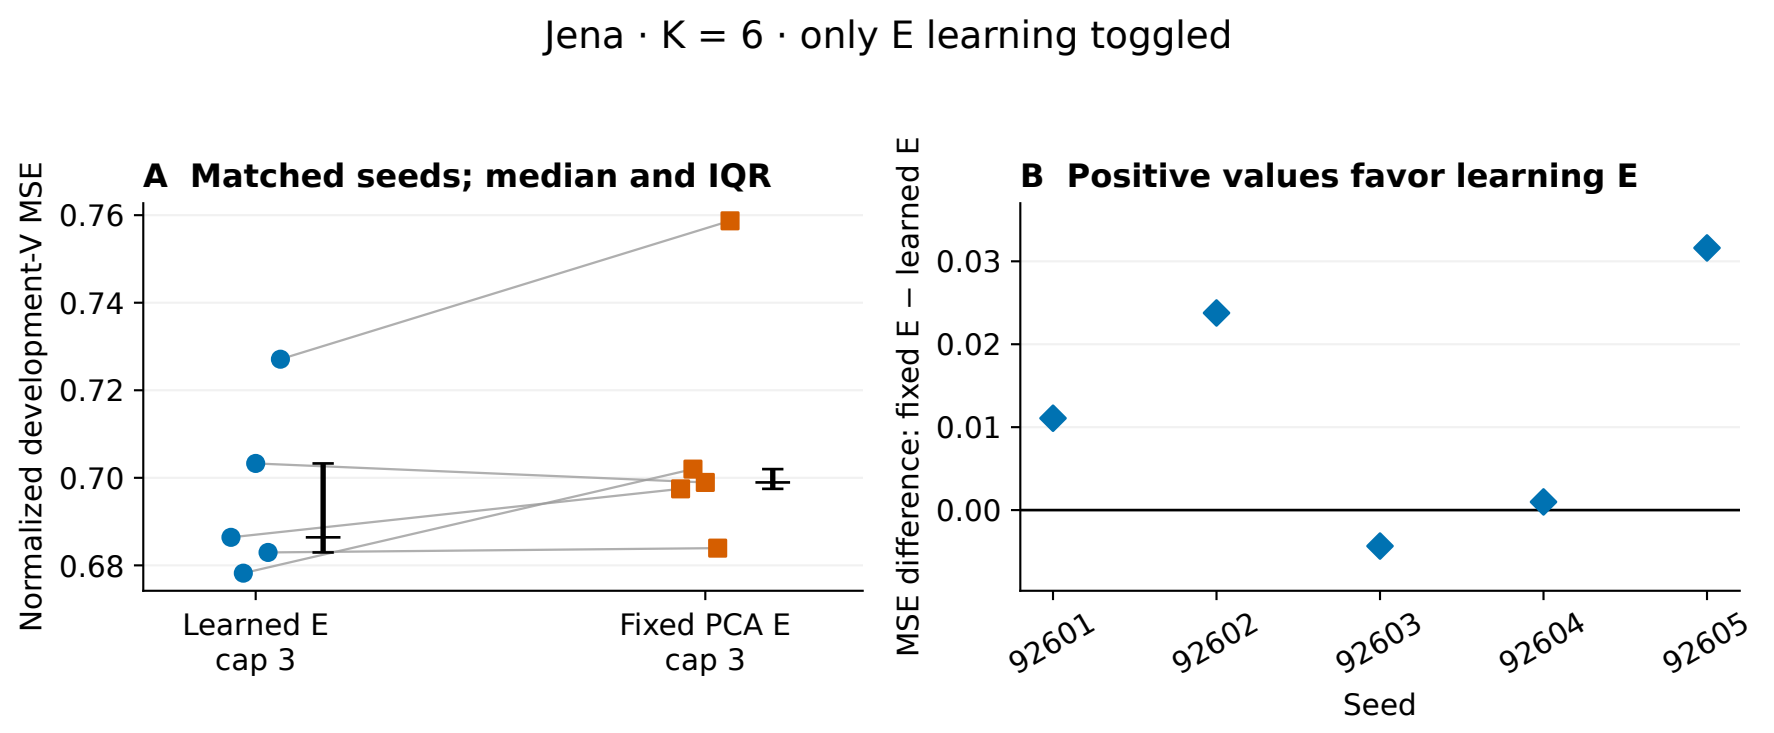

Trainable adapter parameters: learned E 35,717; fixed E 35,591. Both retain the same stored architecture.

Five matched seeds; repeatedly used development V. IQR is descriptive, not a confidence interval.