



Selected procedures on the future window

Dots: fixed optimizer seeds · diamonds: mean · bars: ± 1 sample SD across seeds (not a confidence interval)


A Bike sharing · 5 inputs / 2 targets

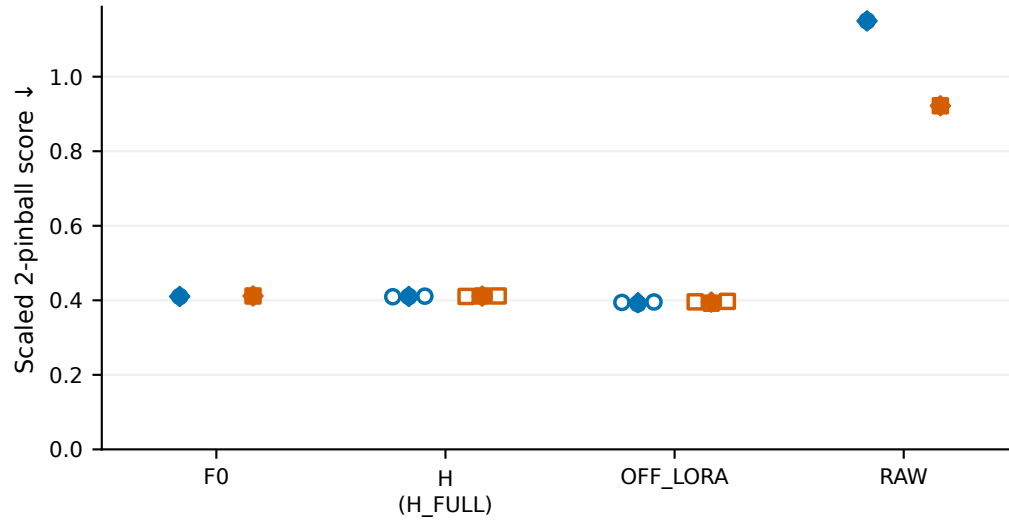


B Household power · 4 inputs / 2 targets

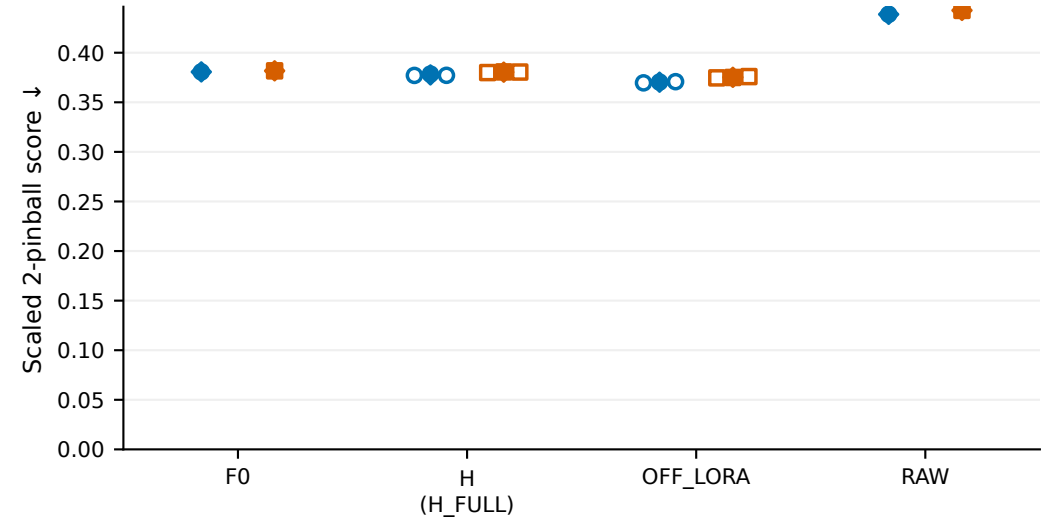

C Bike sharing · 5 inputs / 2 targets

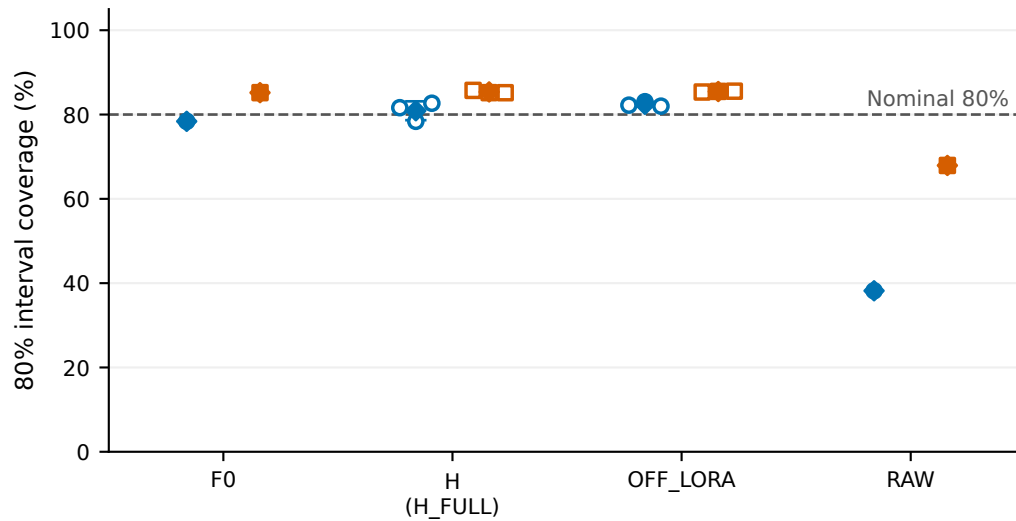

D Household power · 4 inputs / 2 targets

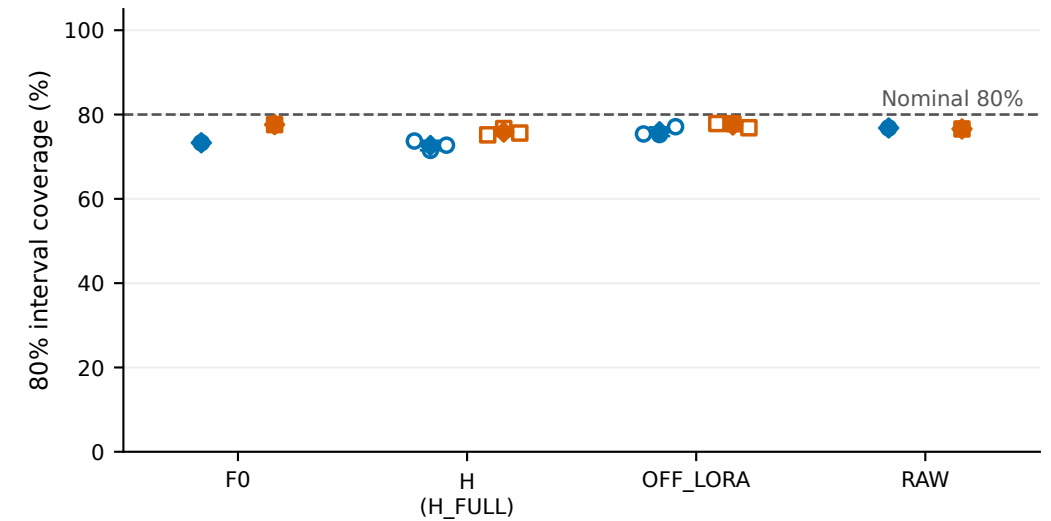

○ SORT □ QCAL

H and OFF_LORA: $n = 3$ fixed seeds; F0 and RAW: one deterministic procedure each, no seed SD. Equal weights for the two targets.

Chronological seasonal/distribution-change screen; no isolated causal shift mechanism. $L = 336$ h, $H = 48$ h; daily origins overlap by 24 h.

V_{select} : 13 origins; C_{cal} : 13 origins; evaluation: 84 days / 83 origins per source. QCAL uses C_{cal} only and gives no coverage guarantee.

Temporal CIs condition on the fixed selections and three fitted optimizer seeds; they exclude selection/training uncertainty and do not represent independent source replications.