



Standard LoRA versus the selected output head

QCAL: $100 \times (\text{score}_H - \text{score}_{\text{OFF_LORA}}) / \text{score}_{F0}$ · positive values favor OFF_LORA

A Bike sharing · 5 inputs / 2 targets

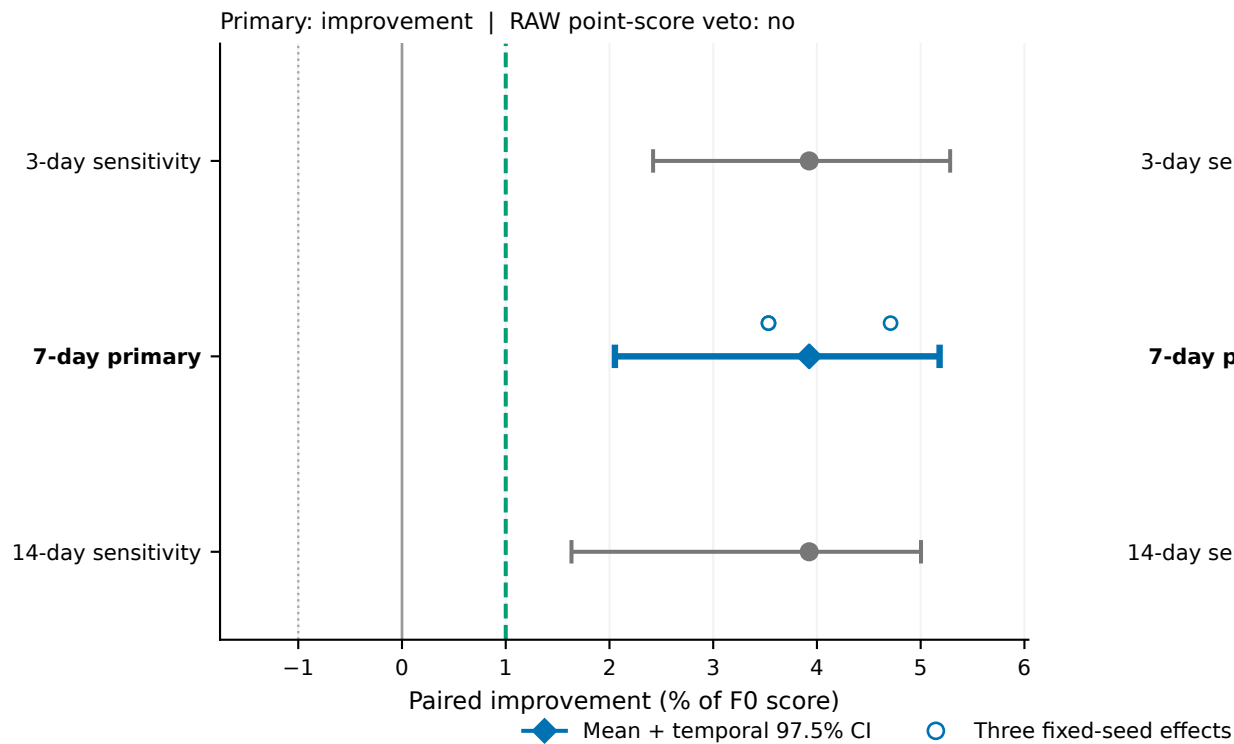

B Household power · 4 inputs / 2 targets

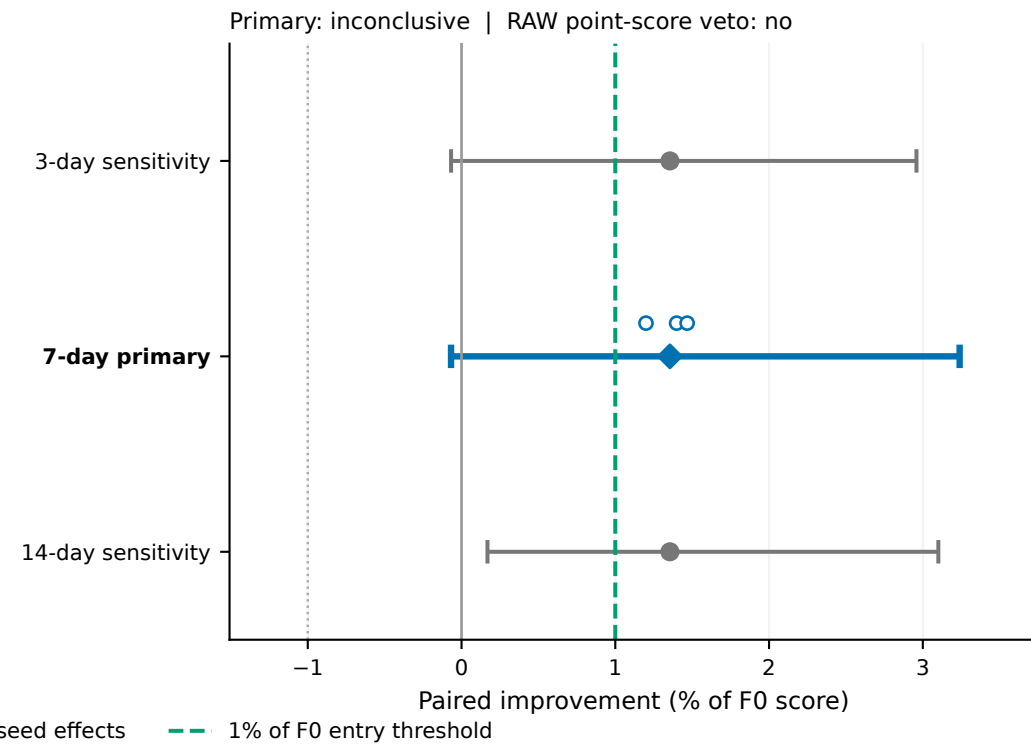

97.5% CI per source; 7-day blocks define the two-source primary family. 3/14-day intervals are descriptive sensitivity, not extra entry tests.

Chronological seasonal/distribution-change screen; no isolated causal shift mechanism. L = 336 h, H = 48 h; daily origins overlap by 24 h.

V_select: 13 origins; C_cal: 13 origins; evaluation: 84 days / 83 origins per source. QCAL uses C_cal only and gives no coverage guarantee.

Temporal CIs condition on the fixed selections and three fitted optimizer seeds; they exclude selection/training uncertainty and do not represent independent source replications.