

SEMANTIC DOCUMENT CLASSIFICATION

Nihan Gümüş-Merve Uğur-Mustafa Güngör Advisor:Erdoğan Doğdu



Çankaya University, Department of Computer Engineering

Abstract


The web is big and there are billions of text documents that cannot be searched efficiently. Most of the current efforts depend of the word vector representation of text documents, and since this does not involve any semantics, the classification methods are not very accurate. In this project we will investigate existing or currently being developed novel methods classification semantic of text in documents, test and extend them, and also develop new semantic methods to classify documents more accurately and compare all methods extensively.

Introduction

Grouping similar features means that the information obtained is valid for that group. The process of partitioning a set of data into subsets is Clustering. objects Document Clustering has wide application fields. Document clustering is used for data mining, information retrieval. knowledge discovery from a data of different category. Document clustering is an application that allows you to perform cluster analysis on text documents. Document clustering is an application that allows you to perform cluster analysis on text documents. The document clustering process includes and uses identifiers and conventions of these identifiers. The identifiers of the words in the cluster are recognized.


Solution


We have more than one document. Today, text documents; the internet, e-mail and electronic data base a lot on web pages and are stored in the format. Organize and browse through the papers every day. To overcome this problem are being used more than one method. This paper discusses the methods used. The purpose of a common set of semantic document set that contains a single semantic web documents logically is to categorize the document set. Understanding automatic and smart text due to insufficient billions of text that cannot be efficiently searching document. Vector representation of most current efforts depends on the text document and this does not include any semantics, classification methods are not very accurate. Classification of text documents in this project or still present in developing new semantic method are investigated and dialectics

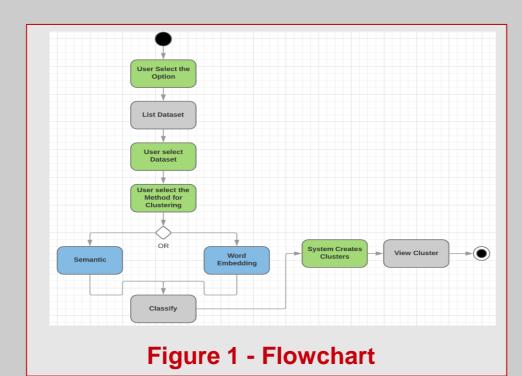

USER DATASET <u>UserID</u> **DatasetID** DOCUMENT DocumentID URL Detail ClusterID City Password CLUSTER IsActive ClusterID **ADMIN METHOD** DocumentID AdminID MethodID MethodTypeID Surname SuccessScore LogDataset METHOD_TYPE IsActive DatasetID <u>MethodTypeID</u> UserID MethodName ActionDateTime

Figure 2 – Database

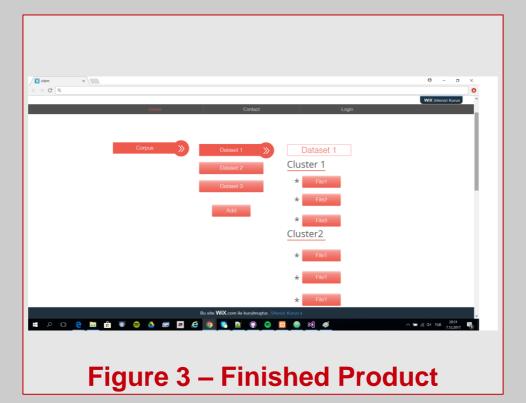

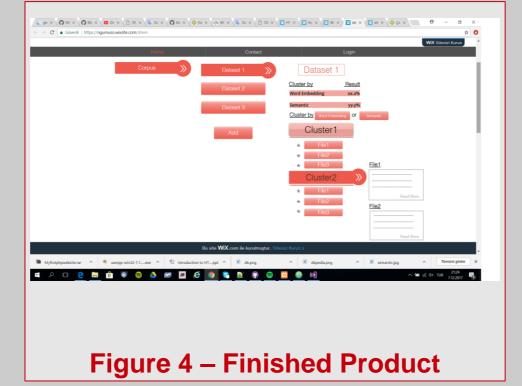

Company Info

Çankaya University is our company.

Results & Conclusion

We have more than one document. Today, text documents; the internet, e-mail and electronic data base a lot on web pages and are stored in the format. Organize and browse through the papers every day. To overcome this problem are being used more than one method. This paper discusses the methods used. The purpose of a common set of semantic document set that contains a single semantic web documents logically is to categorize the document set. Understanding automatic and smart text due to insufficient billions of text that cannot be efficiently searching document. Vector representation of most current efforts depends on the document and this does not include any semantics, classification methods are not very accurate. Classification of text documents in this project or still present in developing new semantic method are investigated and dialectics.

Acknowledgement

Our consultant in the project, Erdoğan Doğdu, helped us very much and supported us a lot. Thanks to him, we have made our project a bigger site by further improving. Her ideas, his aids are very important to us. Thank you very much our consultant. We are also grateful to our colleagues for their support while doing the project.

