DOCUMENTATION TECHNIQUE
Installation et configuration de GLPI

Fernandes Sébastien

13/12/2025

Installation Serveur LAMP :

Installation des paquets nécessaire aux fonctionnement GLPI
“sudo apt-get install apache2 php mariadb-server"

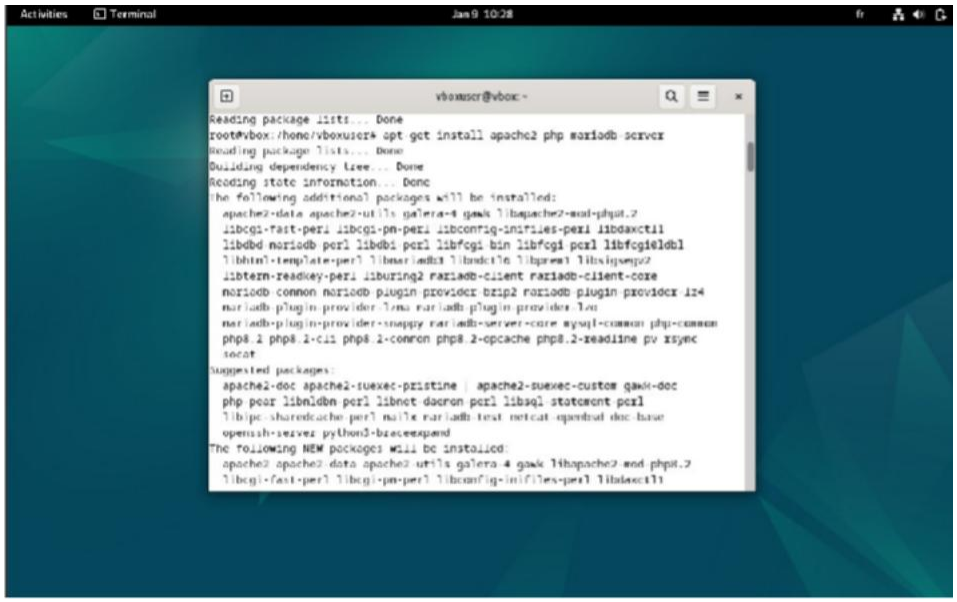

Et les extention lié
“sudo apt-get install php-xml php-common php-json php-mysql php-mbstring php-curl php-gd php-intl php-zip php-bz2 php-imap php-apcu"

Mise en place de MariaDB :

Instalation de de la base de données
“sudo mysql_secure_installation”

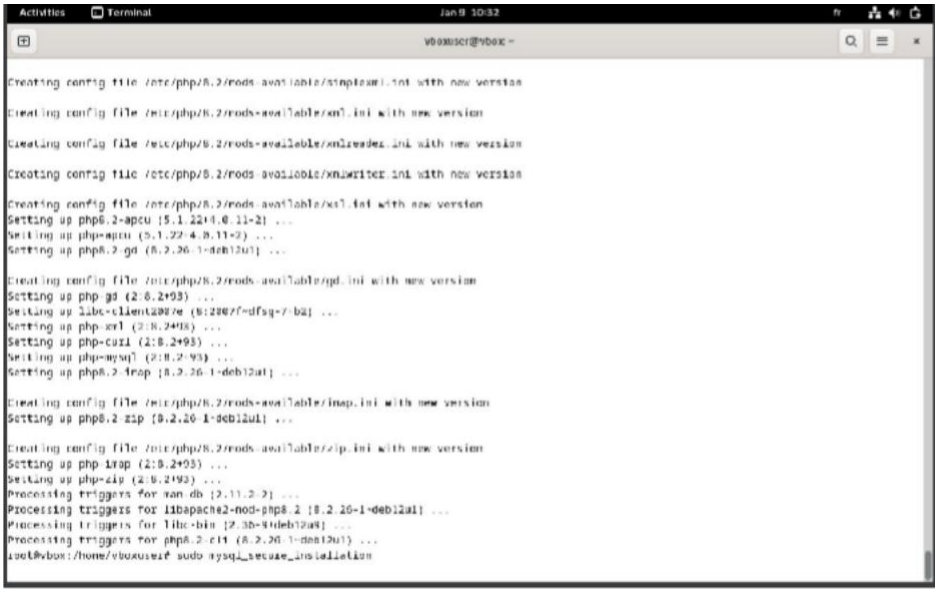

Configuration de la Base de données :

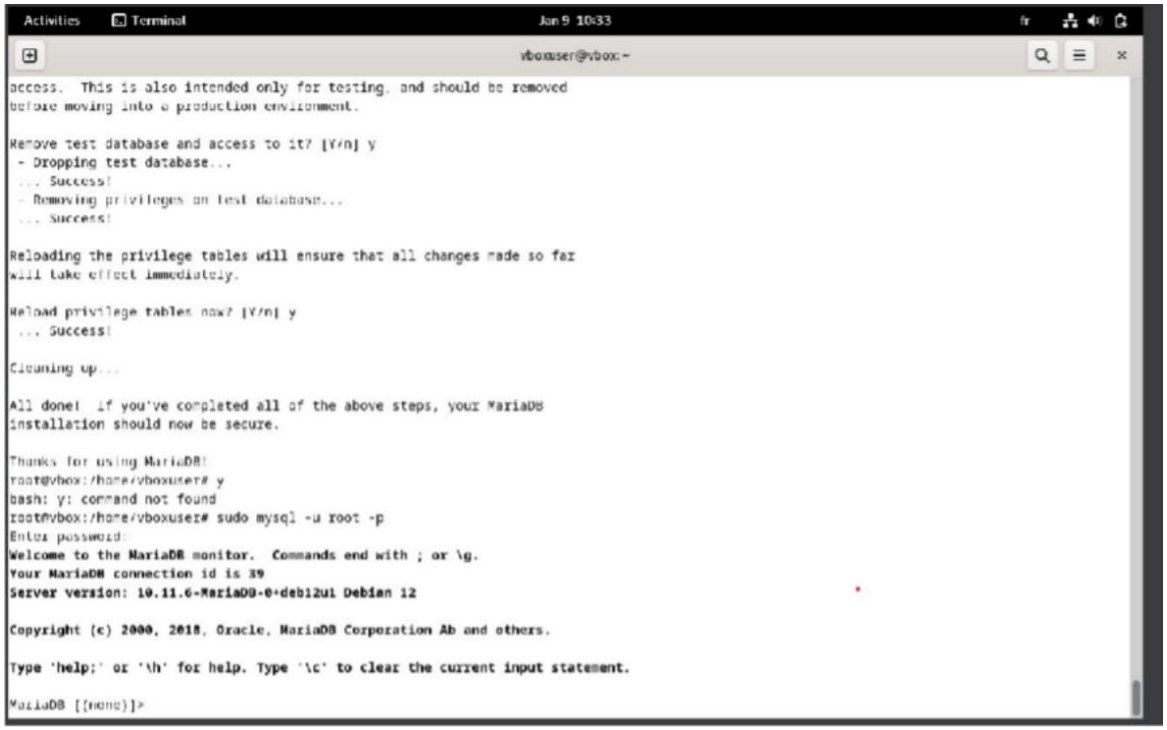

Création de la base de données GLPI et de l'utilisateur admin_GLPI, avec le mots de pass 1234 :

CREATE DATABASE GLPI;
GRANT ALL PRIVILEGES ON GLPI.* TO admin_GLPI@localhost IDENTIFIED BY "1234";
FLUSH PRIVILEGES;
EXIT

```
root@vbox:/home/vboxuser# sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 40
Server version: 10.11.6-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE GLPI;
Query OK, 1 row affected (0.003 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON GLPI.* TO admin_GLPI@localhost IDENTIFIED BY "1234";
Query OK, 0 rows affected (0.004 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> EXIT
Bye
root@vbox:/home/vboxuser#
```

Installation GLPI :
cd /tmp
wget https://github.com/glpi-project/glpi/releases/download/10.0.10/glpi-10.0.10.tgz

```
Activities   Terminal                    Jan 9 10:52                    fr
                                   vboxuser@vbox: ~

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> reset
    ->
    -> Ctrl-C -- exit!
Aborted
root@vbox:/home/vboxuser# sudo mysql -u root -p
Enter password:
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 40
Server version: 10.11.6-MariaDB-0+deb12u1 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> CREATE DATABASE GLPI;
Query OK, 1 row affected (0.003 sec)

MariaDB [(none)]> GRANT ALL PRIVILEGES ON GLPI.* TO admin_GLPI@localhost IDENTIFIED BY "1234";
Query OK, 0 rows affected (0.004 sec)

MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.000 sec)

MariaDB [(none)]> EXIT
Bye
root@vbox:/home/vboxuser# cd /tmp
wget https://github.com/glpi-project/glpi/releases/download/10.0.10/glpi-10.0.10.tgz
--2025-01-09 10:51:51--  https://github.com/glpi-project/glpi/releases/download/10.0.10/glpi-10.0.10.tgz
Resolving github.com (github.com)... 140.82.121.4
Connecting to github.com (github.com)|140.82.121.4|:443... connected.
```

Décompression de l'archive .tgv :
sudo tar -xzvf glpi-10.0.10.tgz -C /var/www/

```
Activities   Terminal                    Jan 9 11:09                    fr
vboxuser@vbox: ~
MariaDB [(none)]> EXIT
Bye
root@vbox:/home/vboxuser# cd /tmp
wget https://github.com/glpi-project/glpi/releases/download/10.0.12/glpi-10.0.12.tgz
--2025-01-09 10:51:51--  https://github.com/glpi-project/glpi/releases/download/10.0.10/glpi-10.0.10.tgz
Resolving github.com (github.com)... 140.82.121.4
Connecting to github.com (github.com)|140.82.121.4|:443... connected.
HTTP request sent, awaiting response... 302 Found
Location: https://objects.githubusercontent.com/github-production-release-asset-2e65be/391827555/2799160e-e62f-47bd-8fe6-a8c58209f3ab?X-Amz-A
lgorithm=AWS4-HMAC-SHA256&X-Amz-Credential=releaseassetproduction%2F20250109%2Fus-east-1%2Fs3%2Faws4_request&X-Amz-Date=20250109T095152Z&X-A
mz-Expires=300&X-Amz-Signature=f4a2c114f3936fd289e8a5775c3f8298bb0b084a8835c666498fbfda0fc08e9a&X-Amz-SignedHeaders=host&response-content-di
sposition=attachment%3D%20filename%3Dglpi-10.0.12.tgz&response-content-type=application%2Foctet-stream [following]
--2025-01-09 10:51:52--  https://objects.githubusercontent.com/github-production-release-asset-2e65be/391827555/2799160e-e62f-47bd-8fe6-a8c50
209f3ab?X-Amz-Algorithm=AWS4-HMAC-SHA256&X-Amz-Credential=releaseassetproduction%2F20250109%2Fus-east-1%2Fs3%2Faws4_request&X-Amz-Date=20250
109T095152Z&X-Amz-Expires=300&X-Amz-Signature=f4a2c114f3936fd289e8a5775c3f8298bb0b084a8835c666498fbfda0fc08e9a&X-Amz-SignedHeaders=host&resp
onse-content-disposition=attachment%3D%20filename%3Dglpi-10.0.10.tgz&response-content-type=application%2Foctet-stream
Resolving objects.githubusercontent.com (objects.githubusercontent.com)... 185.199.111.133, 185.199.108.133, 185.199.110.133, ...
Connecting to objects.githubusercontent.com (objects.githubusercontent.com)|185.199.111.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 59092816 (56M) [application/octet-stream]
Saving to: 'glpi-10.0.10.tgz'

glpi-10.0.10.tgz                    100%[===================================================>]  56.35M  26.5MB/s    in 2.1s

2025-01-09 10:51:54 (26.5 MB/s) - 'glpi-10.0.10.tgz' saved [59092816/59092816]

root@vbox:/tmp# sudo tar -xzvf glpi-10.0.10.tgz -C /var/www/
glpi/
glpi/css_compiled/
glpi/css_compiled/css_install.min.css
glpi/css_compiled/css_palettes_aerialgreen.min.css
glpi/css_compiled/css_palettes_auror.min.css
glpi/css_compiled/css_palettes_auror_dark.min.css
glpi/css_compiled/css_palettes_automn.min.css
```

Création de l'user www-data qui sera le propriétaire des fichier du GLPI et User du serveur Apache :
sudo chown www-data /var/www/glpi/ -R

```
root@vbox:/tmp# sudo chown www-data /var/www/glpi/ -R
```

Création du /etc/glpi, ou les fichier de configuration seront GLPI:
sudo mkdir /etc/glpi
sudo chown www-data /etc/glpi/

```
root@vbox:/tmp# sudo mkdir /etc/glpi
sudo chown www-data /etc/glpi/
```

Déplacé le fichier décompressé dans crépertoire :

```
root@vbox:/tmp# sudo mv /var/www/glpi/files /var/lib/glpi
```

Création du répertoire "/var/lib/glpi"
sudo mkdir /var/lib/glpi
sudo chown www-data /var/lib/glpi/

```
root@vbox:/tmp# sudo mkdir /var/lib/glpi
sudo chown www-data /var/lib/glpi/
```

sudo mv /var/www/glpi/files /var/lib/glpi

```
root@vbox:/tmp# sudo mv /var/www/glpi/files /var/lib/glpi
```

Création et configuration du premier Fichier de configuration :

sudo nano /var/www/glpi/inc/downstream.php

```
<?php

define('GLPI_CONFIG_DIR', '/etc/glpi/');

if (file_exists(GLPI_CONFIG_DIR . '/local_define.php'))

  { require_once GLPI_CONFIG_DIR . '/local_define.php';

}
```

Création et configuration du deuxieme Fichier de configuration :
sudo nano /etc/glpi/local_define.php

Configuration Apache2 :

sudo nano /etc/apache2/sites-available/support.it-connect.tech.conf

Puis, nous allons activer ce nouveau site dans Apache2 :

sudo a2ensite support.it-connect.tech.conf

```
root@vbox:/tmp# sudo a2ensite support.it-connect.tech.conf
Site support.it-connect.tech already enabled
```

Désactiver le site par défaut car il est inutile :

sudo a2dissite 000-default.conf

```
root@vbox:/tmp# sudo a2dissite 000-default.conf
Site 000-default disabled.
To activate the new configuration, you need to run:
  systemctl reload apache2
```

Nous allons aussi activer le module "rewrite" (pour les règles de réécriture) car on l'a utilisé dans le fichier de configuration du VirtualHost (RewriteCond / RewriteRule).

sudo a2enmod rewrite

```
root@vbox:/tmp# sudo a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
  systemctl restart apache2
```

Il ne reste plus qu'à redémarrer le service Apache2 :

sudo systemctl restart apache2

```
root@vbox:/tmp# sudo systemctl restart apache2
```

Installation PHP :
sudo apt-get install php8.2-fpm

```
root@vbox:/tmp# apt-get install apache2
```

Désactivation des modules inutiles
sudo a2enmod proxy_fcgi setenvif
sudo a2enconf php8.2-fpm
sudo systemctl reload apache2

```
root@vbox:/tmp# sudo a2enmod proxy_fcgi setenvif
sudo a2enconf php8.2-fpm
sudo systemctl reload apache2
```

Configuration PHP-FPM pour Apache2,
sudo nano /etc/php/8.2/fpm/php.ini

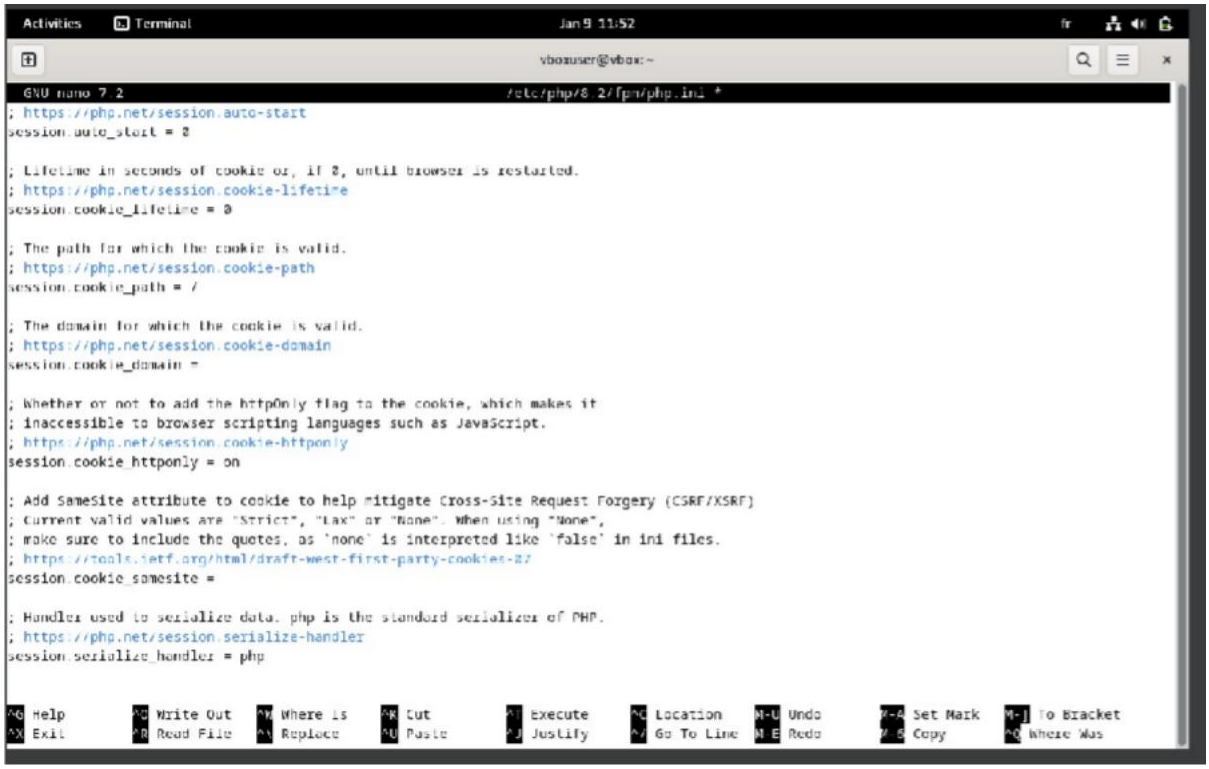

Redémarrage du service :
sudo systemctl restart php8.2-fpm.service

```
root@vbox:/tmp# sudo systemctl restart php8.2-fpm.service
```

Configuration de GLPI avec les informations précédemment définie

Activities
Firefox ESR
Jan 9 12:46
Comment installer GLPI
New Tab
Setup GLPI
[RESOLU] Installation
localhost/install/install.php
GLPI SETUP
Étape 1
Configuration de la connexion à la base de données
Serveur SQL (MariaDB ou MySQL)
localhost
Utilisateur SQL
admin_GLPI
Mot de passe SQL
Continuer

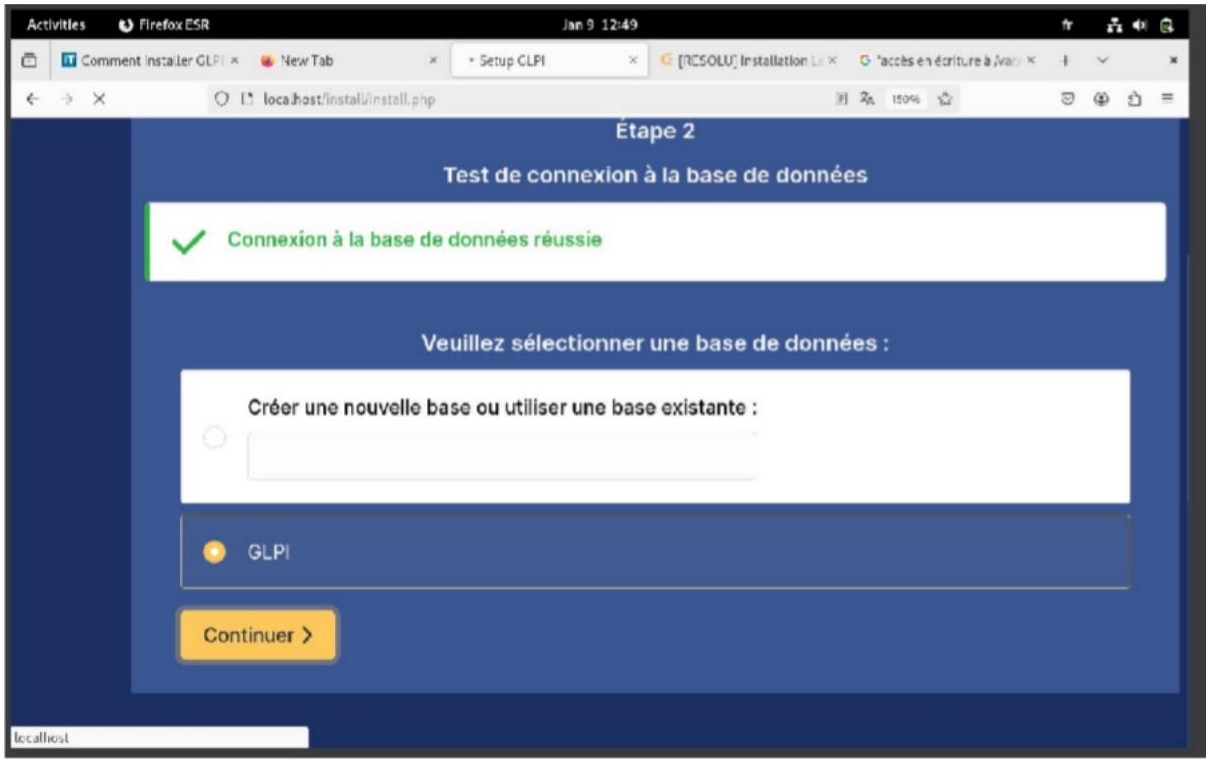
Activities
Firefox ESR
Jan 9 12:49
Comment installer GLPI
New Tab
Setup GLPI
[RESOLU] Installation
localhost/install/install.php
Étape 2
Test de connexion à la base de données
Connexion à la base de données réussie
Veuillez sélectionner une base de données :
Créer une nouvelle base ou utiliser une base existante :
GLPI
Continuer
localhost