

Term-Indexing for the Beagle Theorem Prover

Timothy Clarence Richard Cosgrove

A subthesis submitted in partial fulfillment of the degree of
Bachelor of Science (Honours) at
The Department of Computer Science
Australian National University

September 2013

© Timothy Clarence Richard Cosgrove

Typeset in Palatino by \TeX and $\text{\LaTeX} 2_{\epsilon}$.

Except where otherwise indicated, this thesis is my own original work.

Timothy Clarence Richard Cosgrove
15 September 2013

For Dana.

Acknowledgements

Thank you to my Supervisor and all...

Abstract

This should be the abstract to your thesis. . .

x

Contents

Acknowledgements	vii
Abstract	ix
1 Introduction	1
1.1 Motivation	1
1.1.1 A Theoretical Framework	1
2 Background	3
2.1 First-Order Logic Terms and Notation	3
2.1.1 FOL basics	3
2.1.2 Calculi and FOL problems	3
2.1.3 The Superposition Calculus	3
2.1.4 Specialised Syntax in this Paper	3
2.2 Automated Reasoning and Theorem Proving	4
2.3 Term Indexing	4
2.4 Fingerprint Indexing	4
2.5 The Beagle Theorem Prover	5
2.5.1 The Heirachic Superposition with Weak Abstraction Calculus . .	5
2.5.2 Beagle’s Shortcomings	5
2.6 Tools Used	5
2.6.1 Scala	5
2.6.2 VisualVM	5
2.6.3 Eclipse	5
3 Implementing Fingerprint Indexing	7
3.1 Structure of <i>Beagle</i>	7
3.2 Implementing Fingerprint Indexing	8
3.2.1 Adding terms to the index	8
3.2.2 Retrieving Compatible terms	8
3.3 Adding Indexing to <i>Beagle</i>	9
3.3.1 Refactoring Current Implementation	9
3.3.2 Initial Problems	9
3.3.3 Matching with Subterms	9
3.4 Extending the Indexer	9
3.4.1 Matching and Simplification in <i>Beagle</i>	9
3.4.2 Generalising our FingerprintIndex	9

3.4.3	Applying new Indices to Simplification	10
3.5	Tailoring to <i>Beagle's</i> Heirachic Superposition with Weak Abstraction	
	Calculus	10
3.5.1	Foreground and Background Terms	10
4	Results	13
4.1	Beagle Before Indexing	13
4.2	Indexing Metrics	13
4.2.1	Problem Selection	13
4.2.2	Speed	13
4.2.3	False Positives	13
4.3	Indexing Subsumption	13
4.3.1	Metric Results	13
4.3.2	Comparison	14
4.4	Indexing Simplification and Matching	14
4.4.1	Further Intstrumentation	14
4.4.2	<i>Beagle</i> with Simplification Improvements	14
4.5	Tailored Improvements	14
4.5.1	Layer Checking	14
4.5.2	Metric Results	14
5	Conclusion	15
5.1	Why this is a Very Clever Thesis	15
A	Result Tables for TPTP Selection	17
B	Full TPTP run?	19
	Bibliography	21

Introduction

1.1 Motivation

- Describe beagle
- Advantages of beagle
- drawbacks
- some instrumentation

1.1.1 A Theoretical Framework

Background

2.1 First-Order Logic Terms and Notation

This thesis focuses around the extension of *beagle*, a *first-order logic* (FOL) theorem prover. In order to understand beagle's purpose and functions a basic understanding of the FOL logical system is required. This section provides a rudimentary overview of FOL syntax and uses; but also includes an explanation of any specialised terms and notation used throughout the paper.

2.1.1 FOL basics

2.1.2 Calculi and FOL problems

2.1.3 The Superposition Calculus

Should contain

- Variables
- Symbols
- Predicates
- Quantifiers
- Notion of soundness and completeness
- Description of a 'calculus'

2.1.4 Specialised Syntax in this Paper

- Positions

2.2 Automated Reasoning and Theorem Proving

Automated Reasoning is a rapidly growing field of research where computer programs are used to solve problems stated in first order logic statments or other formal logics.

Some existing theorem provers include:

SPASS

[Weidenbach et al. 1999]

Vampire

[Riazanov and Voronkov 1999]

E

[Schulz 2002]

Should contain

- Theorem prover examples

2.3 Term Indexing

Term indexing is a technique used to better locate logical terms which match rules in a prover's calculus.

Top Symbol Hashing

Discriminant Trees

2.4 Fingerprint Indexing

Fingerprint Indexing is a recent technique developed by Schulz [2012], the creator of the E prover.

Table 2.1: Fingerprint matches for Unification [Schulz 2012, p6]

	f_1	f_2	A	B	N
f_1	Y	N	Y	Y	N
f_2	N	Y	Y	Y	N
A	Y	Y	Y	Y	N
B	Y	Y	Y	Y	Y
N	N	N	N	Y	Y

Table 2.2: Fingerprint matches for Matching [Schulz 2012, p6]

	f_1	f_2	A	B	N
f_1	Y	N	N	N	N
f_2	N	Y	N	N	N
A	Y	Y	Y	N	N
B	Y	Y	Y	Y	Y
N	N	N	N	N	Y

2.5 The Beagle Theorem Prover

The core implementation of Beagle was developed by Peter Baumgartner et al. of NICTA. Its purpose was to demonstrate the capabilities of the *Weak Abstraction with Heirachic Superposition Calculus*; which allows the incorporation of prior knowledge via a ‘background reasoning’ modules.

2.5.1 The Heirachic Superposition with Weak Abstraction Calculus

2.5.2 Beagle’s Shortcomings

2.6 Tools Used

2.6.1 Scala

As mentioned above *beagle* is written in *Scala*, the Scalable Language. Scala is a functional language and may be confusing to those who are not familiar with the functional programming paradigm. This thesis will contain occasional snippets of Scala code; but note that any snippets used will be accompanied by an explanation and in general an understanding of Scala/functional programming is not required.

2.6.2 VisualVM

2.6.3 Eclipse

Implementing Fingerprint Indexing

3.1 Structure of *Beagle*

To be able to make any significant contribution to the *beagle* project, I first had to gain a solid understanding of the existing Scala codebase.

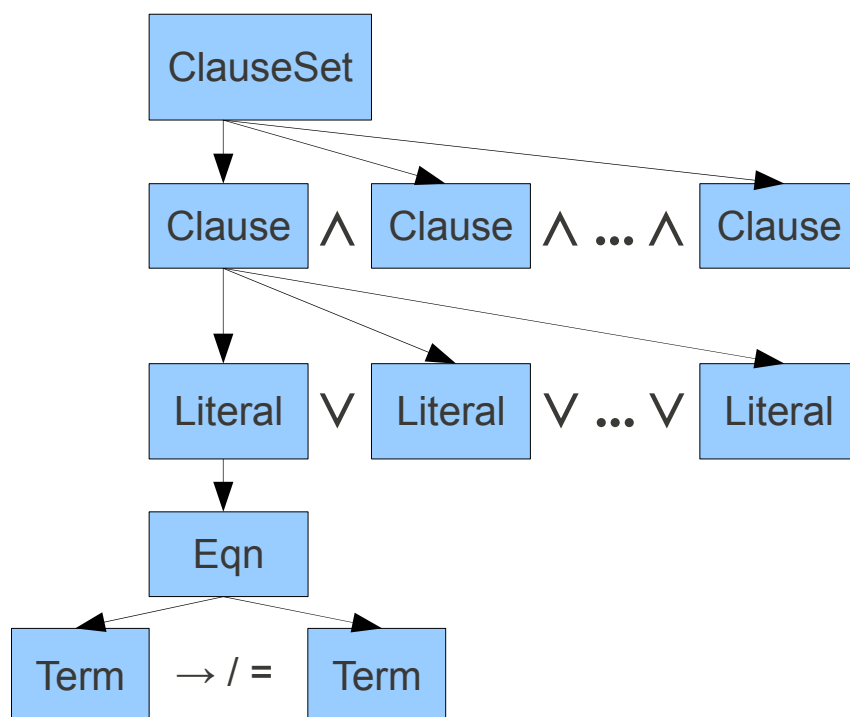


Figure 3.1: Class structure for internal representation of logical formulae.

Describe main inference loop

Refer to results for instrumentation; showing what may be improved with indexing.

3.2 Implementing Fingerprint Indexing

The first step in adding Fingerprint Indexing to *beagle* is creating the indexer itself; a Scala class which will manage the index and provide functions for adding to/retrieving from the Index.

3.2.1 Adding terms to the index

The following block of Scala code extracts a single Fingerprint Feature from a Term at the given position.

```

1  /** Extract the operator at position pos. Note that matching Var
2    * and Funterm is an exhaustive pattern for Term. */
3  def extractFeature(term: Term, pos: Position) : FPFeature = pos match {
4    case Nil      => term match {
5      case t:FunTerm => FPF(t.op) // Found function symbol, return it
6      case t:Var     => FPA       // Found variable, return A
7    }
8    case p :: ps => term match {
9      case t:FunTerm => try {extractFeature(t.args(p), ps) }
10                       //Attempted to index non-existent position, return N
11                       catch {case e:IndexOutOfBoundsException => FPN}
12      // Found variable BEFORE end of position, return B
13      case t:Var     => FPB
14    }
15  }

```

Listing 1: Scala code to extract fingerprint features for matching.

3.2.2 Retrieving Compatible terms

To compare two fingerprints with each other we look at them side-by-side and check that each position shows a Y in the Fingerprint unification table.

```

1  /** Check two Fingerprint features for compatibility based
2    * on the unification table (See page 6 of [Shulz 2012]).
3    * This table is reduced to 4 cases:
4    * - True if Features are equal,
5    * - True if at least one Feature is B,
6    * - True if at least one Feature is A; but no Ns,
7    * - False otherwise */
8  def compareFeaturesForUnification
9      (a:FPFeature, b:FPFeature) : Boolean =
10      (a == b) ||
11      (Set(a,b) match {
12          case x if (x contains FPB) => true
13          case x if (x contains FPA) => !(x contains FPN)
14          case _ => false})

```

Listing 2: Scala implementation of the Fingerprint unification table. [Schulz 2012, p6]

3.3 Adding Indexing to *Beagle*

3.3.1 Refactoring Current Implementation

Actually making use of our indexer class will require significant modification to *beagle*'s structure and proving sequence.

Refer to class and flow diagrams from 3.2

3.3.2 Initial Problems

3.3.3 Matching with Subterms

discuss how we are required to match against subterms. Requires significant modification to the fingerprint indexer

3.4 Extending the Indexer

With *beagle* now fully indexing terms for superposition

3.4.1 Matching and Simplification in *Beagle*

3.4.2 Generalising our FingerprintIndex

explain available options, their reasoning and their implementations.

3.4.3 Applying new Indices to Simplification

3.5 Tailoring to *Beagle*'s Heirachic Superposition with Weak Abstraction Calculus

In this section we discuss the thought process in developing and implementing extensions to Fingerprint Indexing in order to better tailor it to *beagle*'s rather unique logical calculus.

3.5.1 Foreground and Background Terms

In the Heirachic Superposition with Weak Abstraction Calculus all terms have a concept of being 'Foreground' or 'Background'. In Section 2.5 we discussed this concept; referring to it as the *layer* of a term. It is worht noting at this stage that computing the layer of a term is cheap (or rather, zero, as it is computed on the fly during term generation and stored for later use).

Recall the four original fingerprint feature symbols from 2.3:

- f : arbitrary constant function symbols.
- A : Variable at the exact position.
- B : A variable could be expanded to meet the position.
- N : Position can never exist regardless of variable assignment.

We introduce two new fingerprint features: $A+$ and $B+$. These symbols will be used for the same purpose as the original A and B , but only for '*background*' or '*abstraction*' variables. These variables can only be used for pure background terms; a fact we may use to restrict the possible matches for unification.

The layeredness of function symbols is also relevant to our comparison. $f+$ in the following table signifies a position where the entire subterm from this position downwards is 'pure background'. Keep in mind that this definition is slightly different to the definition for $A+$ and $B+$; as we must consider all function symbols below f itself.

At this point it is important to note that these added fingerprint features slightly modify the original A , B and f features. These features will now only represent the foreground layered positions.

Table 3.1 displays the unification table with our new background feature symbols. The table has grown to be a considerable size. Refer to the original unification table (Table 2.1) for an in-depth explanation of how this table should be interpreted [Schulz 2012].

Note that as this table is for unification it is symmetric along the leading diagonal (as in the original unification table); so we need only discuss the lower triangle of the matrix. Furthermore, notice that the bottom right segment of the table is actually

Table 3.1: Fingerprint matches for unification; extended by considering term layers.

	f_1	f_2	A	B	N	f_{1+}	f_{2+}	A+	B+
f_1	Y	N	Y	Y	N	N	N	N	N
f_2	N	Y	Y	Y	N	N	N	N	N
A	Y	Y	Y	Y	N	Y	Y	Y	Y
B	Y	Y	Y	Y	Y	Y	Y	Y	Y
N	N	N	N	Y	Y	N	N	N	Y
f_{1+}	N	N	Y	Y	N	Y	N	Y	Y
f_{2+}	N	N	Y	Y	N	N	Y	Y	Y
A+	N	N	Y	Y	N	Y	Y	Y	Y
B+	N	N	Y	Y	Y	Y	Y	Y	Y

identical to the original unification table. This is expected as when we compare two pure background features the comparison behaves normally.

We will justify the new section of the table line by line:

- Background function symbols (f_+): Recall that this feature is only applicable if the entire subterm below f is pure background. Therefore it does not match the foreground version of the same symbol. It does however match both **A** and **B**. This is required since these symbols still match ‘*impure*’ background variables; which may be expanded to either foreground or pure background terms.
- Abstraction variables (**A+**): Similarly to the pure background function symbol feature, this feature cannot match any terms which sit in the foreground. It can however match both **A** and **B** as they may represent either foreground or background expressions.
- Potential expansion of an abstraction variable **B+**: Same as for **A+** but can also match **N**.

To go with this table we present its corresponding Scala matching code in Listing 3. Unfortunately the steep increase in table size results in the amount of code required exploding. It also becomes impossible to use our earlier trick of Set matching; due to the need for parametrised Fingerprint symbols (i.e. **A+** and **B+** represented as `FPA(true)` and `FPB(true)`).

```

1  /** Check two Fingerprint features for compatibility based
2     * on the *extended* unification table (See table in report).*/
3  def compareFeaturesForUnification
4     (a:FPFeature, b:FPFeature) : Boolean =
5     (a,b) match {
6         case (FPF(f1), FPF(f2))      => (f1.op == f2.op) &&
7                                         (if (f1.isFG || f2.isFG)
8                                             (!f1.isPureBG && !f2.isPureBG)
9                                             else true)
10        case (FPF(f), FPB(true))    => f.isPureBG
11        case (FPB(true), FPF(f))    => f.isPureBG
12        case (_, FPB(_))             => true
13        case (FPB(_), _)             => true
14        case (FPF(f), FPA(true))    => f.isPureBG
15        case (FPA(true), FPF(f))    => f.isPureBG
16        case (FPN, FPA(_))          => false
17        case (FPA(_), FPN)          => false
18        case (_, FPA(_))             => true
19        case (FPA(_), _)             => true
20        case (FPN, FPN)              => true
21        case _                       => false
22    }

```

Listing 3: Scala code to extract fingerprint features for extended layer matching.

Results

4.1 Beagle Before Indexing

4.2 Indexing Metrics

4.2.1 Problem Selection

Not going to run everything against all of TPTP. Will take out a subset of TPTP (25–50 problems) run them against this set. Show the set and justify inclusions/exclusions

4.2.2 Speed

4.2.3 False Positives

Explain this metric and how it impacts performance

4.3 Indexing Subsumption

4.3.1 Metric Results

We observe many, even after a myriad of optimisations. Notice that this is due to the structure of beagle; many retrieved terms are cheaply thrown out due to other conditions (such as being a parent term, being ordered, etc.) and do not significantly impact performance.

Refer to email from Stephan. compare false positive results

4.3.2 Comparison

4.4 Indexing Simplification and Matching

4.4.1 Further Instrumentation

4.4.2 *Beagle* with Simplification Improvements

4.5 Tailored Improvements

4.5.1 Layer Checking

4.5.2 Metric Results

Conclusion

5.1 Why this is a Very Clever Thesis

Result Tables for TPTP Selection

Full TPTP run?

Bibliography

- RIAZANOV, A. AND VORONKOV, A. 1999. Vampire. In *Automated Deduction – CADE-16*, Volume 1632 of *Lecture Notes in Computer Science*, pp. 292–296. Springer Berlin Heidelberg. (p.4)
- SCHULZ, S. 2002. E – A Brainiac Theorem Prover. *Journal of AI Communications* 15, 2/3, 111–126. (p.4)
- SCHULZ, S. 2012. Fingerprint indexing for paramodulation and rewriting. In B. GRAMLICH, D. MILLER, AND U. SATTLER Eds., *Automated Reasoning*, Volume 7364 of *Lecture Notes in Computer Science*, pp. 477–483. Springer Berlin Heidelberg. (pp.4, 5, 9, 10)
- WEIDENBACH, C., AFSHORDEL, B., BRAHM, U., COHRS, C., ENGEL, T., KEEN, E., THEOBALT, C., AND TOPIĆ, D. 1999. System description: Spass version 1.0.0. In *Automated Deduction – CADE-16*, Volume 1632 of *Lecture Notes in Computer Science*, pp. 378–382. Springer Berlin Heidelberg. (p.4)