
WiFi Connection

Network: atomic-detroit

Password: cOrrectHOrse



Beginning HTML and CSS

Session 2

Welcome!

Girl Develop It is here to provide affordable and accessible programs to learn software through mentorship and hands-on instruction.

Some "rules"

- We are here for you!
- Every question is important
- Help each other
- Have fun


Anatomy of a website

Your Content
+ HTML: Structure
+ CSS: Presentation
= Your Website


A website is a way to present your content to the world, using HTML and CSS to present that content & make it look good.

Tag Breakdown

OPENING TAG

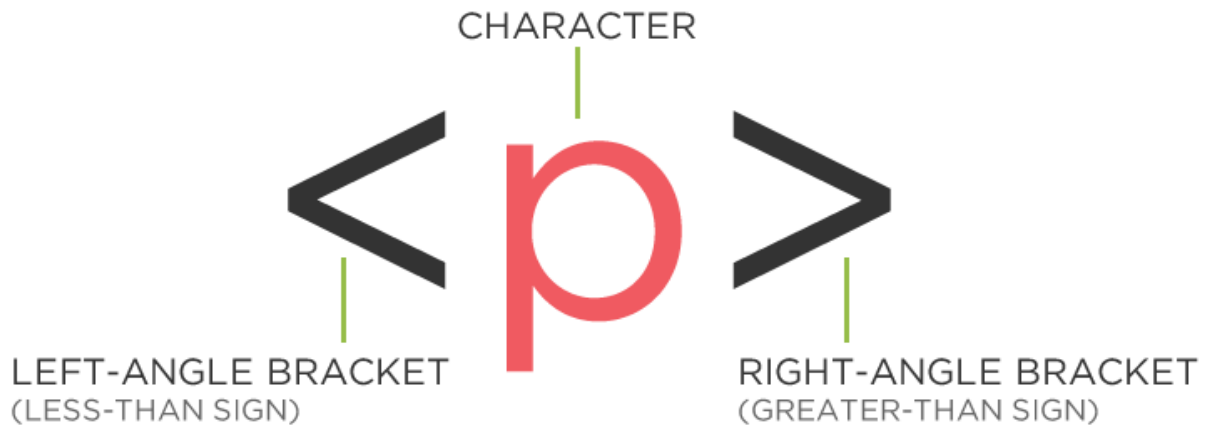

CLOSING TAG

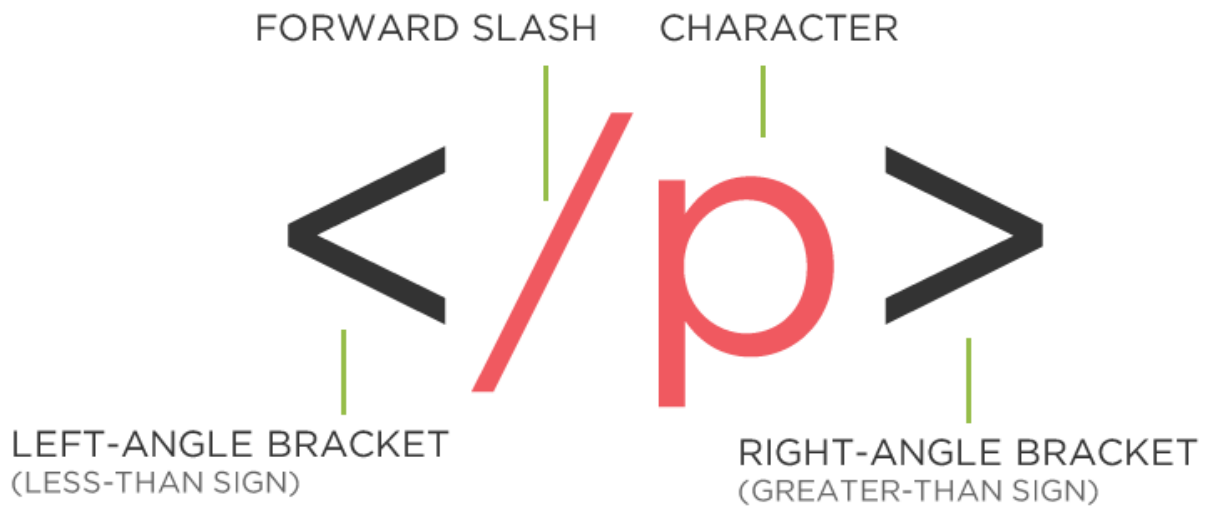


The CSS Rule



What we'll be making today

Today we will be making a site from scratch using divs and spans to create a header, footer, sidebar and a content area.

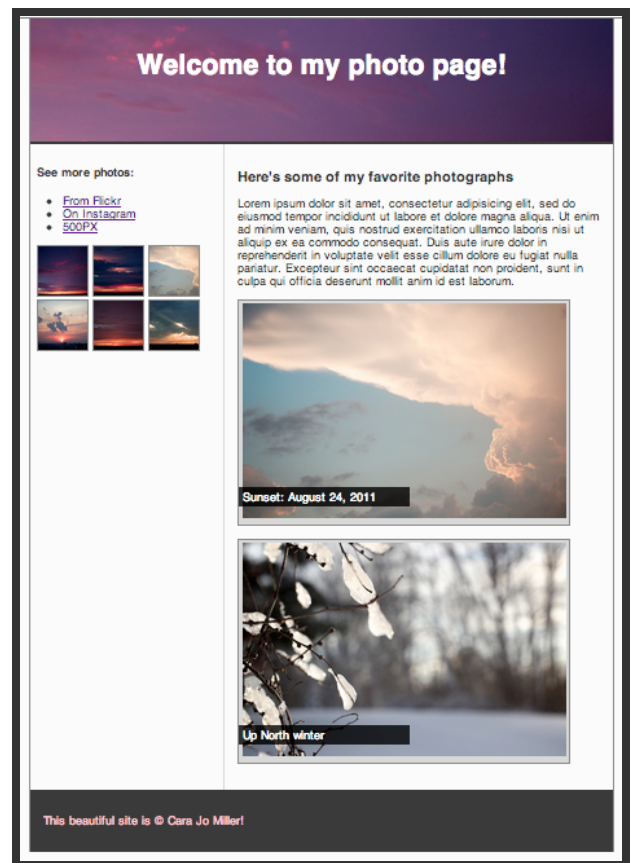

Inline vs Block


So far, we have
mostly seen
"block" elements

They appear on
the next line, like
paragraphs

There are also
"inline" elements

They appear on
the same line that
they are written
on.

Block & Inline

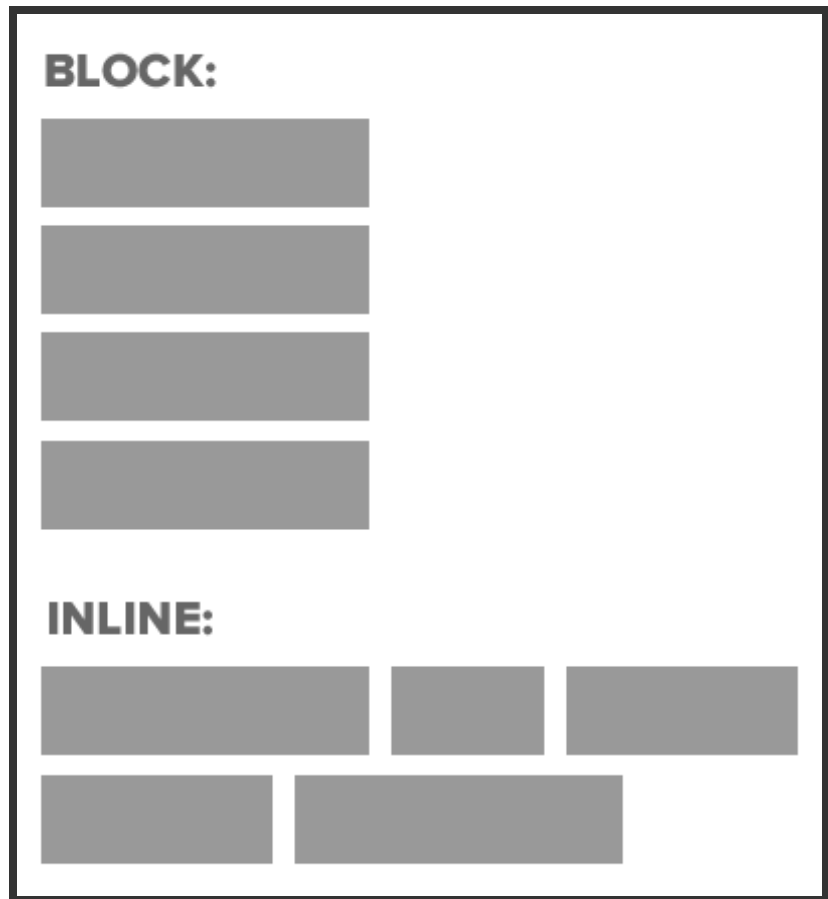

Elements,

- CSS divides HTML into two types: inline and block.
- After block elements, browsers render a new line.
- Inline elements: `img`, `a`, `br`, `em`, `strong`
- Block elements: `p`, `h1`, `ul`, `li`, almost everything else

Element: Div

- Block level element. Each new div is rendered on a new line.
- A division, or section of content within an HTML page.
- Used to group elements to format them with CSS.
- Apply IDs and Classes to divs to control their styles with CSS.

```
<div>
  <p>Content<p>
  <p>Content<p>
</div>
```

```
<div id="header">
  <h1>Main Heading<h1>
</div>
```

```
<div class="sub-content">
  <p>Some more content<p>
</div>
```

Grouping elements with div

- The div tag is used everywhere to group elements together into sections.
- For example, what if we want the first 2 paragraphs of a section to be right-aligned, purple & bold, but we don't want any other paragraphs to be right-aligned?
- We would wrap them in a div element to style them differently.

Grouping elements with div, cont.

```
.align-right{  
  text-align:right;  
  color: purple;  
  font-weight: bold;  
}
```

```
<div class="align-right">  
  <p>Lorem ipsum dolor sit amet, consectetur adipiscing elit</p>  
  <p>Sed do eiusmod tempor incididunt ut labore et dolore.</p>  
</div>  
<p>Magna aliqua. Ut enim ad minim veniam.</p>  
<p>Quis nostrud exercitation ullamco.</a>
```

**Lorem ipsum dolor sit amet, consectetur
adipiscing elit**

**Sed do eiusmod tempor incididunt ut labore et
dolore.**

Magna aliqua. Ut enim ad minim veniam.

Quis nostrud exercitation ullamco.

Let's Develop It

Let's create a site using divs to separate content into different sections on our page.

Create a header, content area, sidebar, and a footer.

Element: Span

- Inline element. Each new span is rendered next to each other & only wraps when it reaches the edge of the containing element.
- Can be used to apply styles to text inline so as not to break the flow of content.

Span

Span is used to apply a specific style inline

```
.yellow{  
  color:yellow;  
}
```


```
<p>Paragraph with <span class ="yellow">yellow</span>  
text.</p>
```

Paragraph with yellow text.

Let's Develop It

Let's add some spans to our content to help highlight some text.


Box Model

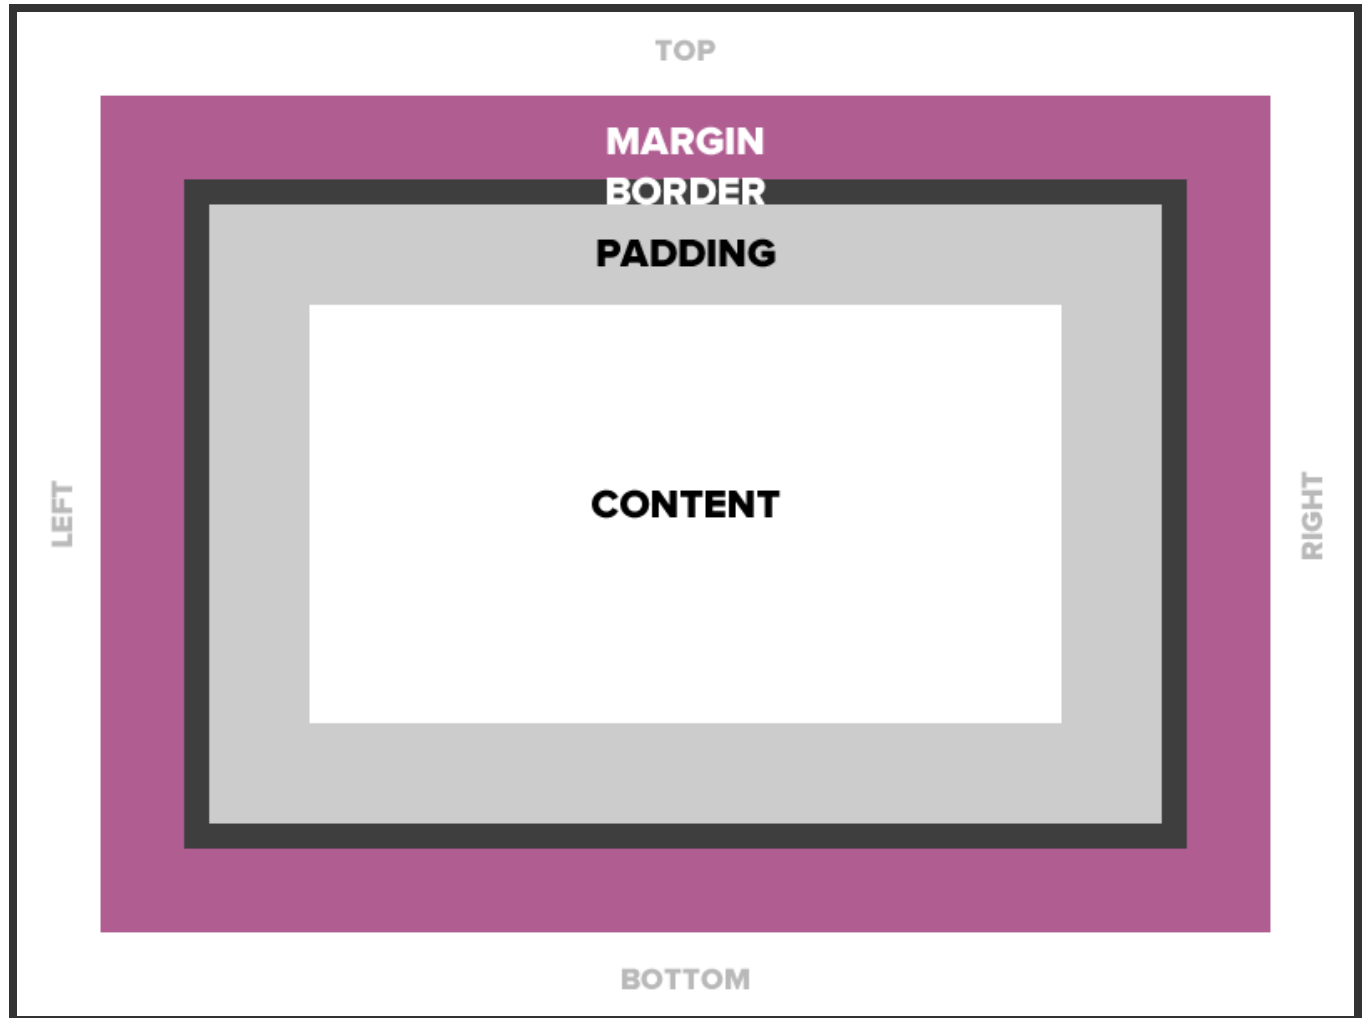

Padding

Space between the border and the content

Adds to the total width of the box.

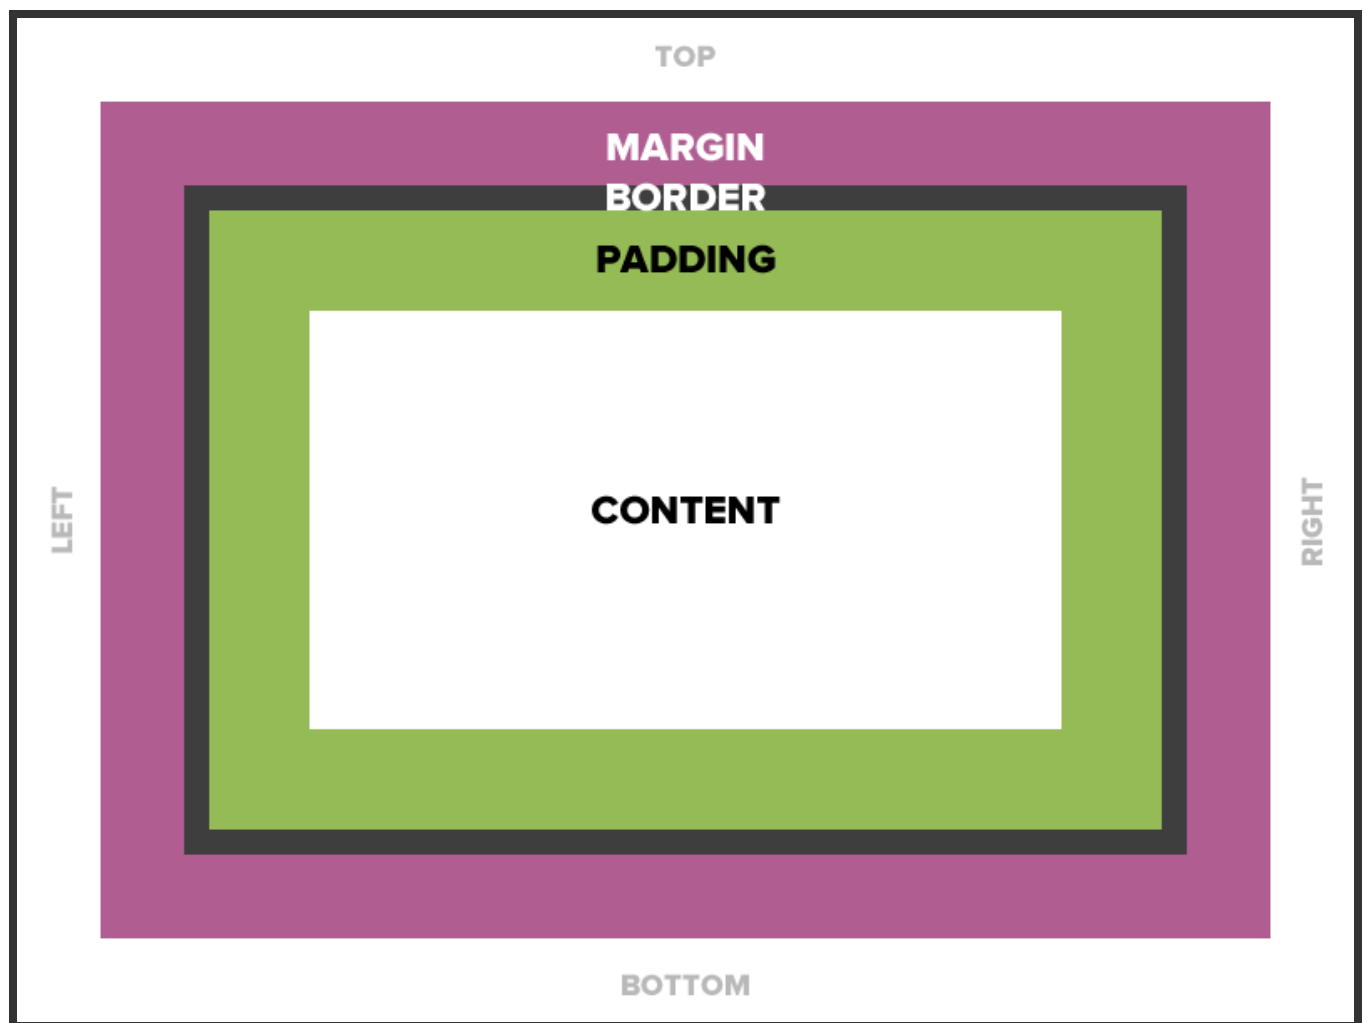

Padding

15 pixels on all sides

```
padding: 15px;
```

10 pixels on top only

```
padding-top: 10px;
```

10 on top, 5 on right, 3 on bottom, 5
on left

```
padding: 10px 5px 3px 5px;
```

Padding

Four values

```
padding: top right bottom left;
```

Two values


```
padding: top/bottom right/left;
```

One value

```
padding: all;
```

Padding

```
padding: 10px 20px 30px 40px;
```

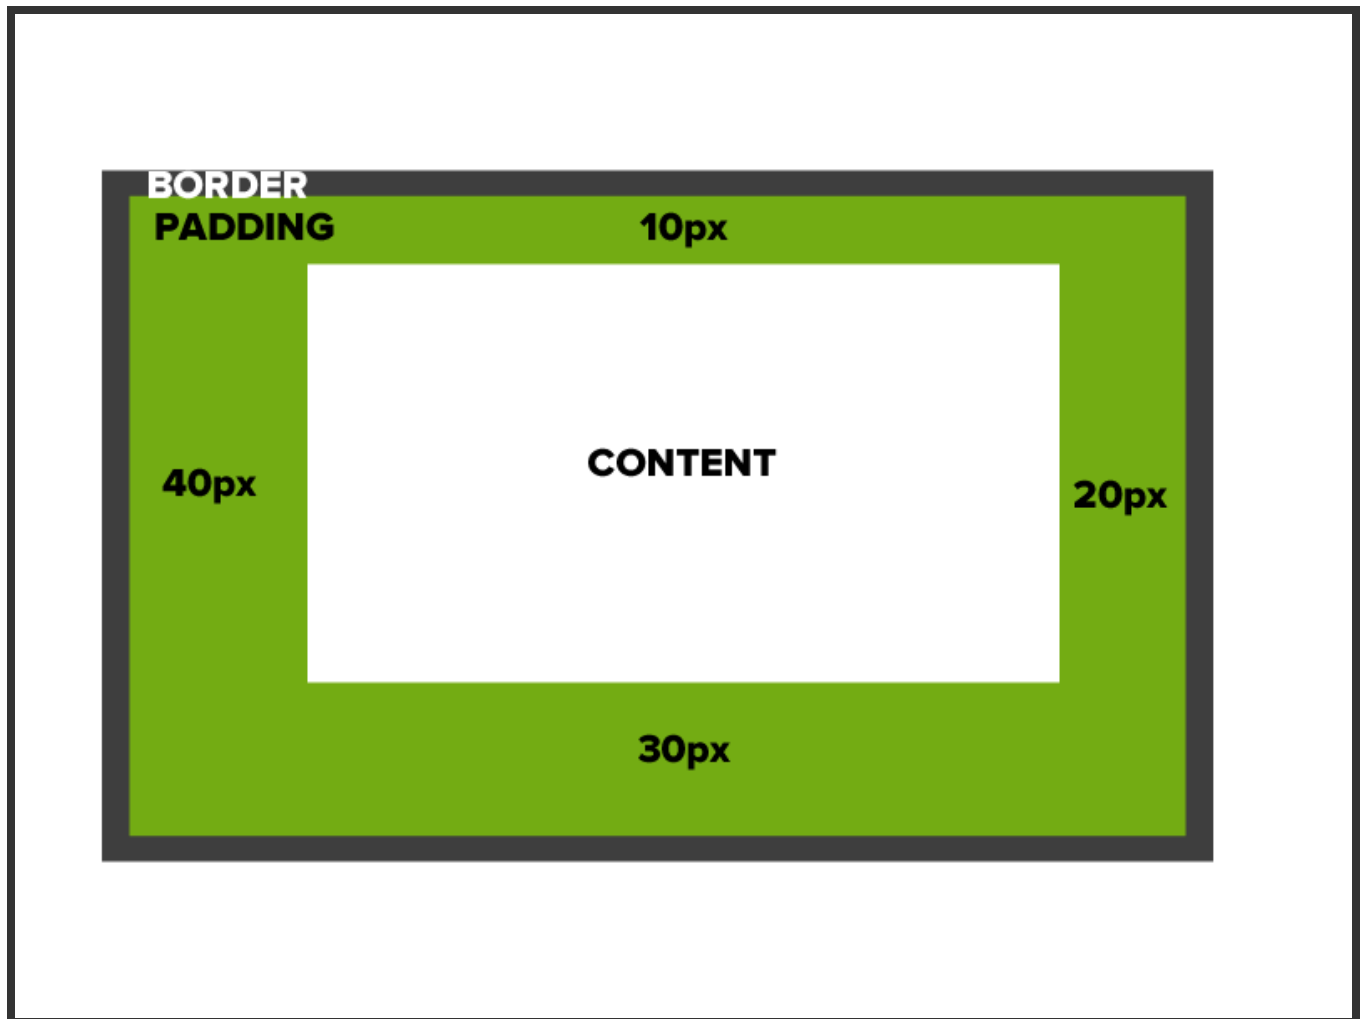


Let's Develop it!

Let's add some padding to our divs.

Border

The edge around the box, specified as "thickness, style, color."

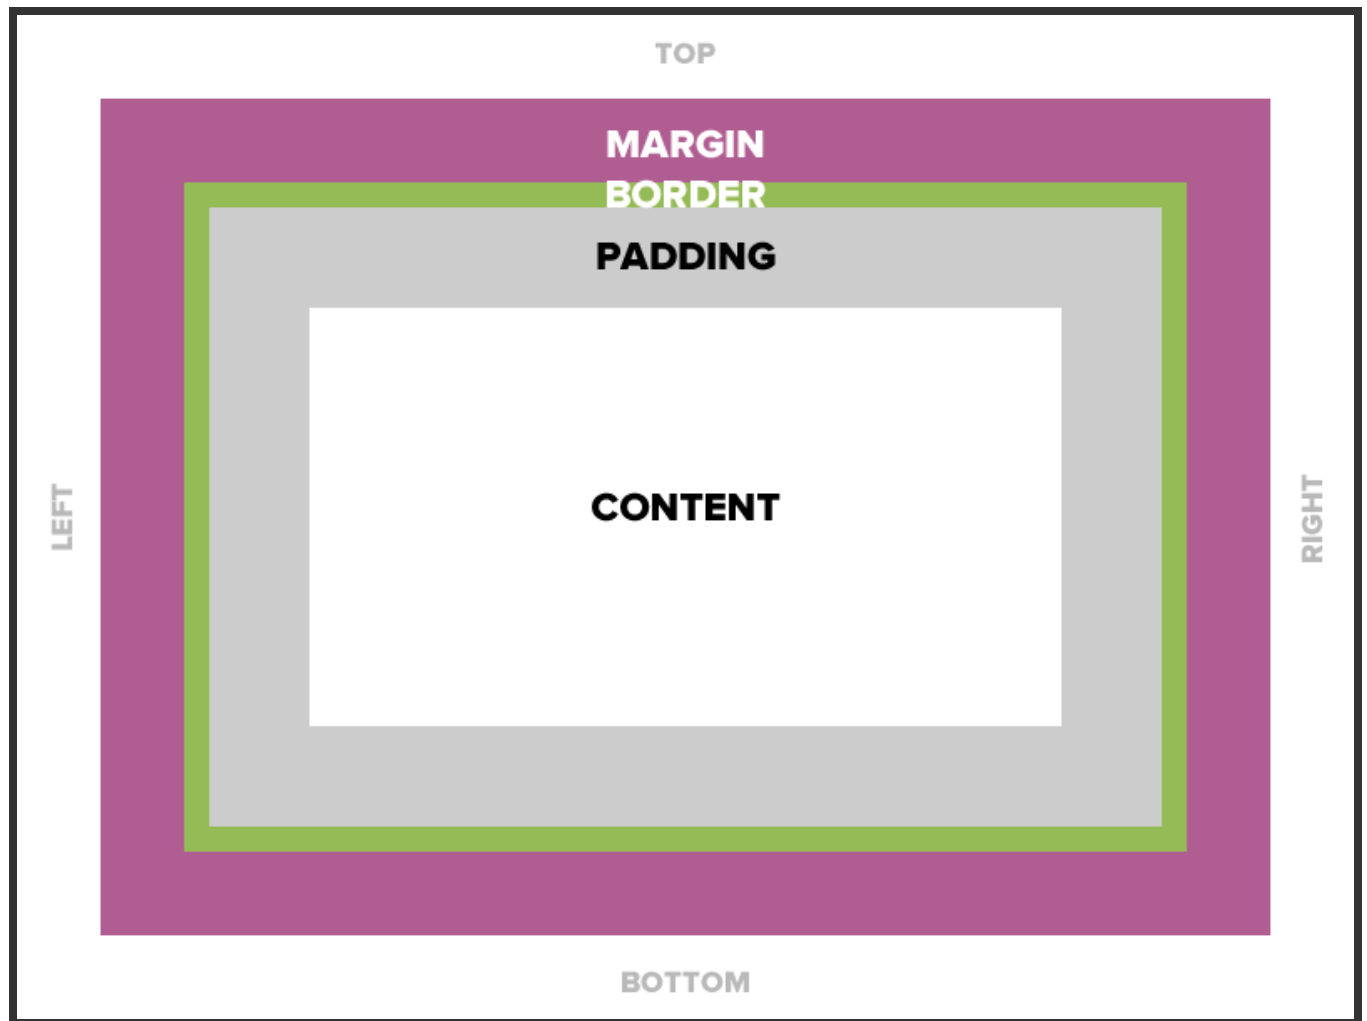

Border

A solid red border

```
border: 1px solid #ff0000;
```

A thick dotted black top border

```
border-top: 4px dotted #000000;
```

Two different border styles

```
border-top: 1px solid #ff0000;  
border-bottom: 4px dotted #000000;
```


Border - Other Properties

```
border-width: 10px;  
border-style: dashed;  
border-color: #666666;
```


You can specify each property separately, or all three together.

Let's Develop it!

Let's add borders to our divs.

Margin

The transparent area around the box that separates it from other elements.

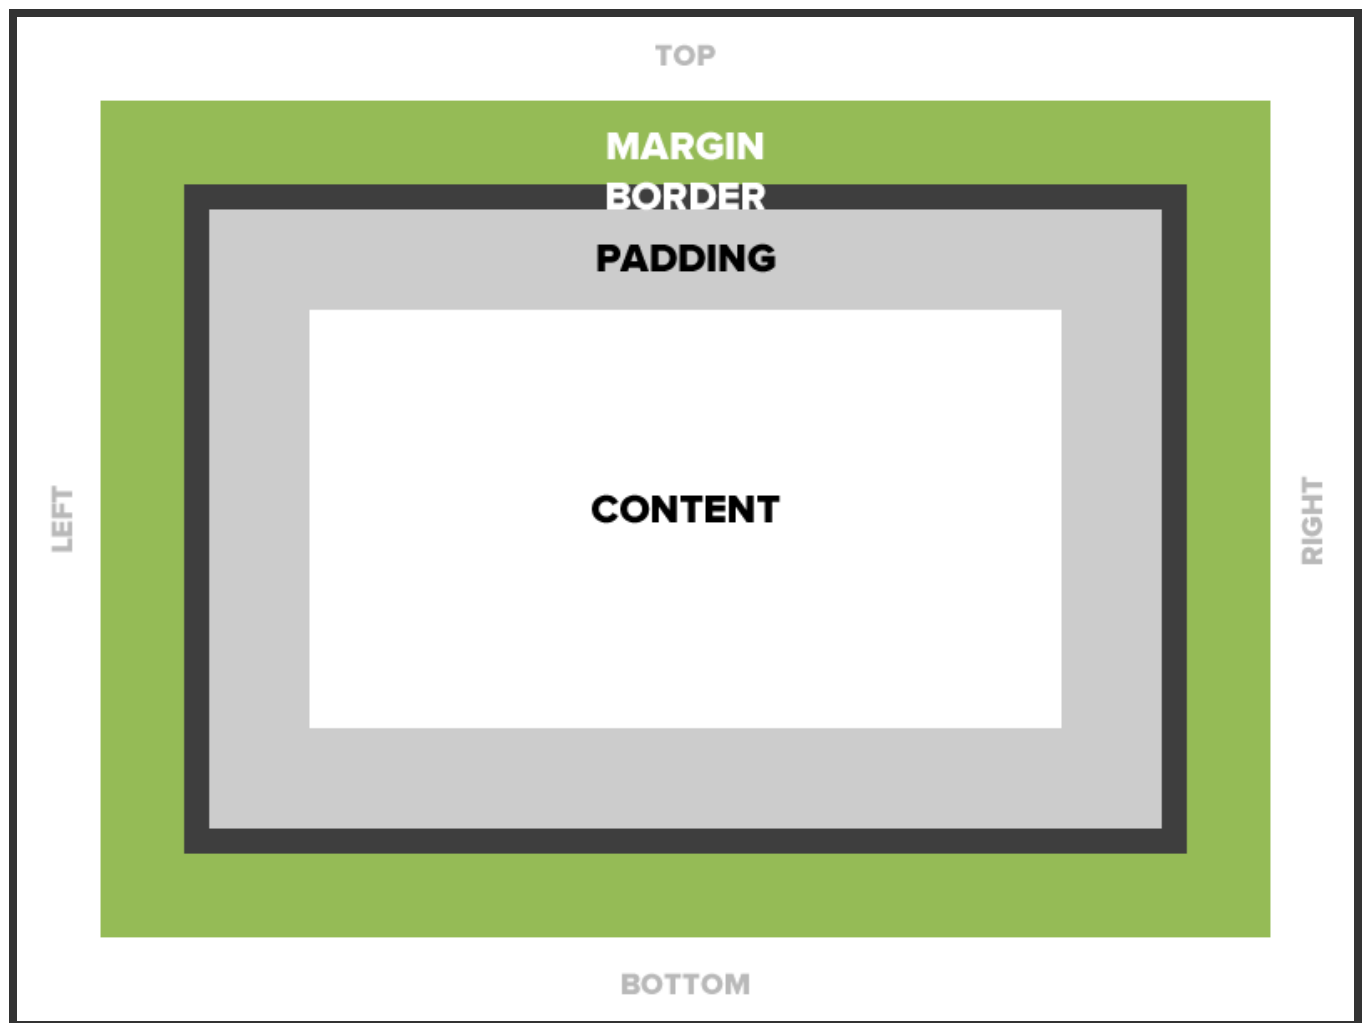

Margin

15 pixels on all sides

```
margin: 15px;
```

10 on top, 5 on right, 3 on bottom, 5
on left

```
margin: 10px 5px 3px 5px;
```

10 pixels on top

```
margin-top: 10px;
```

Auto Margin

If a margin is set to auto on a box that has width, it will take up as much space as possible.

CENTERED

```
margin: auto;  
width: 300px;
```

FLUSH-RIGHT

```
margin-left: auto;  
margin-right: 5px;  
width: 300px;
```

Let's Develop it!

Let's add some margins to our divs.
Let's center our entire document in
the browser.

Property: Width

Sets the width of an element.

Does not include padding or borders, remember these add to the width.

Property: Height

Sets the height of an element.

Does not include padding or borders, remember these add to the width.

Let's develop it!

Add a width & height to our divs.

Use IDs to target each div with CSS

Make the wrapper 900px wide.

Make the sidebar 300px wide.

Make the content area 550px wide.

Make the header 150px tall

Make the footer 100px tall

Questions?

We're here to help!



Break

Let's eat some snacks!

Static Positioning

HTML elements are positioned static by default.

Static elements are positioned in the normal flow of the page


Static elements ignore top, bottom, right or left property specifications.

Static Positioning

In normal flow, inline boxes flow from left to right, wrapping to next line when needed.

```
  
  
  
...  
  

```

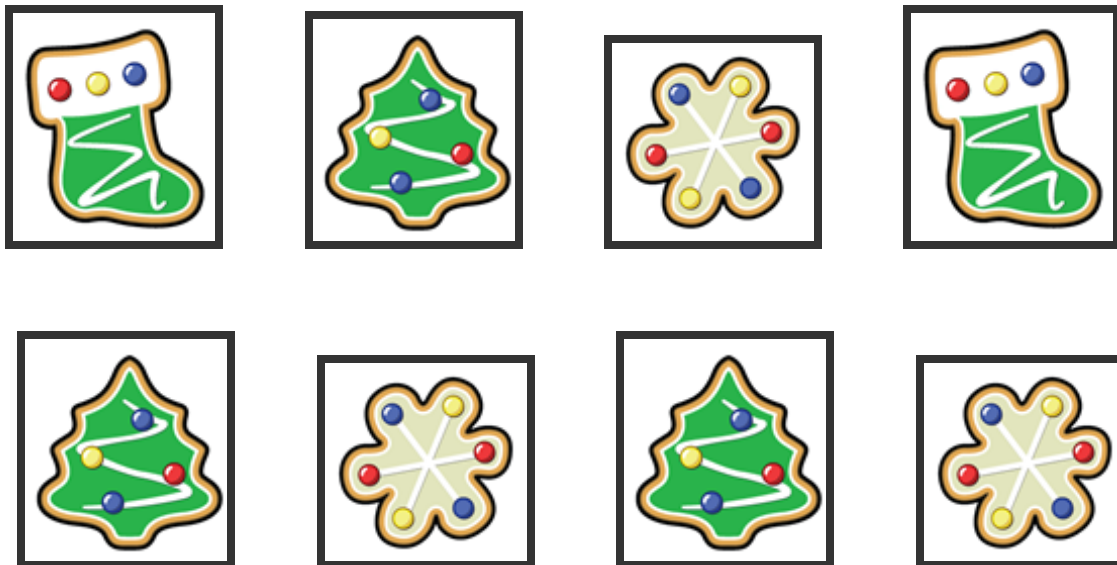

Static Positioning

In normal flow, block boxes flow from top to bottom, making a new line after every box.

```
<p>Greetings</p>  
<p>Hello</p>  
<p>Hi there!</p>
```

Greetings

Hello

Hi there!

Relative Positioning

- Takes the element out of the normal flow, allowing it to be moved to the top, left, right or bottom.
- Does not affect the elements surrounding it.
- Makes an element a "positioning context" in which to position other elements relative to it.
- Relative positioning and absolute positioning are used together.

Relative Positioning

The "relative" value will still put the element in the normal flow, but then offset it according to top/left/right/bottom properties.

```
.relative{  
  position: relative;  
  left: 80px;  
  top: 20px;  
  height: 100px;  
  background-color: yellow;  
}
```



Hello, hi!

Absolute Positioning

- Positions element outside of the normal flow.
- An absolutely positioned element is offset from its container block, positioned relative.
- Its container block is the first element that has a position other than static.
- If no such element is found, the container block is `<html>`.
- Other elements act as if it's not there.
- Determined by its offset values in the properties `top`, `bottom`, `right` and `left`.

Absolute Positioning


The "absolute" value will take the element out of the normal flow and position it in relation to the window (or the closest non-static element).

```
.top{  
  position: absolute;  
  top: -40px;  
  right: 10px;  
  background-color: yellow  
}
```

```
.bottom{  
  position: absolute;  
  bottom: -40px;  
  left: 60px;  
  background-color: green  
}
```

Example: Absolute Positioning

Here's an example of an image with a caption absolutely positioned over top of it.

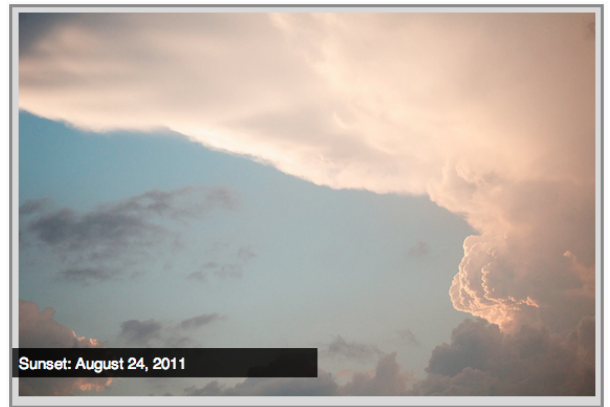

The containing div has a position of relative, and the caption has a position of absolute.

Z-index

When you use positioning to move elements out of the normal flow of content, elements can overlap. You can change the order of overlapping with z-index.

The element with highest z-index goes on top.

```
.bottom{  
  position: absolute;  
  bottom: 10px;  
  left: 60px;  
  background-color: yellow;  
}
```

```
.top{  
  position: absolute;  
  bottom: 15px;  
  left: 60px;  
  background-color: green;  
  z-index: 2;  
}
```

Let's Develop it!

Let's add some positioning.

Let's create a div that contains an image and a caption, and position the caption absolutely overtop the image.

Float

- "Floating" an element takes it in the normal flow, as far to the left or right of it's containing element as possible.
- Any other elements, such as paragraphs or lists, will wrap around the floated element.
- Always specify a width when floating an element, otherwise the element is likely to take up the whole page and not appear floated.
- You can specify a) whether an element is floated or not, and b) which side it floats on.

Float: Example

Below a <blockquote> is floated to the left, allowing text to wrap around it on the right

That's when they discovered Are You a Human. After switching to PlayThru, HiredMyWay saw a 40% decrease in the amount of time it takes an average user to sign up for the site, from 4 minutes, 24 seconds to 2 minutes, 39 seconds. That's almost **two minutes saved** per user.

“The technology behind Are You a Human seemed like a breath of fresh air.”

—Wes Weiler, CMO

Even better, after implementing PlayThru, the percentage of HiredMyWay users who complete their profile after signing up was 80%.

CMO

HiredMyWay That's no surprise—CAPTCHA's effectiveness is supported by numerous studies indicating that one in four people will

And PlayThru didn't just improve HiredMyWay's numbers—it also improved their overall customer experience. “Coming onto my site, and that's a bad experience,” says Wes. “Everything's an emotional roller coaster on our site.”

Float

```
.float{  
  float:left;  
  width:200px;  
  background:yellow;  
}
```

Hi, I'm a yellow
box with black
text.
I like to hang out
on the left side.

Not floating element

Not floating element

Not floating element

with wrapping Lorem

ipsum dolor sit amet, consectetur

adipiscing elit, sed do eiusmod

tempor incididunt ut labore et dolore

magna aliqua.

Using floats to place elements side by side

If you want two block level elements to be side by side, you need to float both elements. One left, and one right.



Clear

- Clearing tells the element on which side (right, left, both) other elements **cannot** appear.
- If you had an image floated left, and you did not want the paragraph to appear next to it, you would add **clear: left;** to the paragraph.
- Clearing both sides makes sure floats don't flow past the clear element.

```
clear: right;  
clear: left;  
clear: both;
```

Clear

```
.float{  
  float:left;  
  width:50px;  
  background:yellow;  
}  
.clear-left{  
  clear:left  
}
```

hi Not floating element

hi Not floating element

hi

None floating element with a class of
.clear-left

Let's Develop It

Let's float our side bar and content areas.

Pseudo-classes, more CSS for links

Changing the format of a link when you hover over it is accomplished by using pseudo-classes.

CSS pseudo-classes are used to add special effects to some selectors.

Syntax:

```
selector:pseudo-class
{
  property:value;
}
```

Example:

```
a:link
{
  text-decoration: none;
}
```

Pseudo-classes, more CSS for links

```
a:link           {color:#FF0000;} /* unvisited link */
a:visited        {color:#00FF00;} /* visited link */
a:hover          {color:#FF00FF;} /* mouse over link */
/
a:active          {color:#0000FF;} /* selected link */
```

Note: a:hover MUST come after a:link and a:visited in the CSS definition in order to be effective!

Note: a:active MUST come after a:hover in the CSS definition in order to be effective!

Let's Develop it!

Let's style our links using pseudo classes.

What's wrong with my code

Why do you think this code isn't working?

WRONG:

```
<a href="index.html" Home Page</a>
```

CORRECT:

```
<a href="index.html">Home Page</a>
```

Don't forget to make sure all your brackets are enclosing your tag name and tag attributes.

What's wrong with my code?

Why do you think this code isn't working?

WRONG:

```
<p>A paragraph of text<p/>
```

CORRECT:

```
<p>A paragraph of text</p>
```

Make sure the closing slash comes before the ending tag name.

What's wrong with my code?

Why do you think this code isn't working?

WRONG:

```
#sidebar {  
  float: left  
  width: 200px  
  color: green  
}
```

CORRECT:

```
#sidebar {  
  float: left;  
  width: 200px;  
  color: green;  
}
```

Don't forget semi-colons after CSS properties.

What's wrong with my code?

Why do you think this code isn't working?

WRONG:

```
body {  
  color: grey;  
  p {  
    font-size: 30px;  
  }  
}
```

CORRECT:

```
body {  
  color: grey;  
}  
p {  
  font-size: 30px;  
}
```

All CSS selectors and properties must be self contained.
Selectors cannot be inside the { } of other selectors.

Questions?

We're here to help!



E-mail me with questions you have
any time at corrinajo@gmail.com



Topom
down here