243--Lab - Administración del software

En esta práctica se muestra como actualizar software y revertir los cambios con el gestor de paquetes *yum*.

De igual forma se muestra como descargar archivos con el comando *curl* e instalar y acceder al AWS CLI utilizando un AWS access key ID y un AWS secret access key.

Actualizar software en la máquina Linux

El gestor de paquetes *yum* nos permite administrar las actualizaciones de software en la máquina.

Para buscar actualizaciones disponibles usamos el comando *yum -y check-update*.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum -y check-update
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
```

Para instalar actualizaciones que corrigen vulnerabilidades de seguridad ejecutamos *sudo yum update –security*.

```
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum update --security
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
amzn2-core                                                          | 3.6 kB  00:00:00
No packages needed for security; 0 packages available
No packages marked for update
```

El mensaje nos indica que no hay versiones más nuevas que descargar.

Para actualizar todos los paquetes del sistema a su versión más reciente ejecutamos *sudo yum -y upgrade*.

Con este comando, el gestor de paquetes compara la versión de cada programa instalado con la versión más reciente disponible en los repositorios de internet.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum -y upgrade
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
No packages marked for update
```

El mensaje nos indica que no hay versiones más nuevas que descargar.

En el caso de que hubiera actualizaciones disponibles se mostrarían en un listado y los paquetes serían actualizados.

Ahora instalaremos el servidor web Apache con el comando *sudo yum install httpd -y*.

La opción *-y* sirve para responder automáticamente con "si" a todas las preguntas de confirmación durante la actualización.

```
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum install httpd -y
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Resolving Dependencies
--> Running transaction check
---> Package httpd.x86_64 0:2.4.65-1.amzn2.0.2 will be installed
--> Processing Dependency: httpd-filesystem = 2.4.65-1.amzn2.0.2 for package: httpd-2.4.65-1.amzn
2.0.2.x86_64
--> Processing Dependency: httpd-tools = 2.4.65-1.amzn2.0.2 for package: httpd-2.4.65-1.amzn2.0.2
.x86_64
--> Processing Dependency: /etc/mime.types for package: httpd-2.4.65-1.amzn2.0.2.x86_64
--> Processing Dependency: httpd-filesystem for package: httpd-2.4.65-1.amzn2.0.2.x86_64
--> Processing Dependency: mod_http2 for package: httpd-2.4.65-1.amzn2.0.2.x86_64
--> Processing Dependency: system-logos-httpd for package: httpd-2.4.65-1.amzn2.0.2.x86_64
--> Processing Dependency: libapr-1.so.0()(64bit) for package: httpd-2.4.65-1.amzn2.0.2.x86_64
--> Processing Dependency: libaprutil-1.so.0()(64bit) for package: httpd-2.4.65-1.amzn2.0.2.x86_6
4
--> Running transaction check
---> Package apr.x86_64 0:1.7.2-1.amzn2.0.1 will be installed
---> Package apr-util.x86_64 0:1.6.3-1.amzn2.0.1 will be installed
--> Processing Dependency: apr-util-bdb(x86-64) = 1.6.3-1.amzn2.0.1 for package: apr-util-1.6.3-1
.amzn2.0.1.x86_64
---> Package generic-logos-httpd.noarch 0:18.0.0-4.amzn2 will be installed
---> Package httpd-filesystem.noarch 0:2.4.65-1.amzn2.0.2 will be installed
---> Package httpd-tools.x86_64 0:2.4.65-1.amzn2.0.2 will be installed
---> Package mailcap.noarch 0:2.1.41-2.amzn2 will be installed
---> Package mod_http2.x86_64 0:1.15.19-1.amzn2.0.2 will be installed
--> Running transaction check
---> Package apr-util-bdb.x86_64 0:1.6.3-1.amzn2.0.1 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

=================================================================================================
 Package                    Arch          Version                    Repository          Size
=================================================================================================
Installing:
 httpd                      x86_64        2.4.65-1.amzn2.0.2         amzn2-core         1.4 M
Installing for dependencies:
 apr                        x86_64        1.7.2-1.amzn2.0.1          amzn2-core         130 k
 apr-util                   x86_64        1.6.3-1.amzn2.0.1          amzn2-core         101 k
 apr-util-bdb               x86_64        1.6.3-1.amzn2.0.1          amzn2-core          22 k
 generic-logos-httpd        noarch        18.0.0-4.amzn2             amzn2-core          19 k
 httpd-filesystem           noarch        2.4.65-1.amzn2.0.2         amzn2-core          25 k
 httpd-tools                x86_64        2.4.65-1.amzn2.0.2         amzn2-core          90 k
 mailcap                    noarch        2.1.41-2.amzn2             amzn2-core          31 k
 mod_http2                  x86_64        1.15.19-1.amzn2.0.2        amzn2-core         149 k
```

```
Transaction Summary
================================================================================================
Install  1 Package (+8 Dependent packages)

Total download size: 1.9 M
Installed size: 5.3 M
Downloading packages:
(1/9): apr-1.7.2-1.amzn2.0.1.x86_64.rpm                                    | 130 kB  00:00:00
(2/9): apr-util-1.6.3-1.amzn2.0.1.x86_64.rpm                               | 101 kB  00:00:00
(3/9): apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64.rpm                           |  22 kB  00:00:00
(4/9): generic-logos-httpd-18.0.0-4.amzn2.noarch.rpm                       |  19 kB  00:00:00
(5/9): httpd-filesystem-2.4.65-1.amzn2.0.2.noarch.rpm                      |  25 kB  00:00:00
(6/9): httpd-2.4.65-1.amzn2.0.2.x86_64.rpm                                 | 1.4 MB  00:00:00
(7/9): mailcap-2.1.41-2.amzn2.noarch.rpm                                   |  31 kB  00:00:00
(8/9): httpd-tools-2.4.65-1.amzn2.0.2.x86_64.rpm                           |  90 kB  00:00:00
(9/9): mod_http2-1.15.19-1.amzn2.0.2.x86_64.rpm                            | 149 kB  00:00:00
------------------------------------------------------------------------------------------------
Total                                                           10 MB/s | 1.9 MB  00:00:00
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Installing : apr-1.7.2-1.amzn2.0.1.x86_64                                                  1/9
  Installing : apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64                                         2/9
  Installing : apr-util-1.6.3-1.amzn2.0.1.x86_64                                             3/9
  Installing : httpd-tools-2.4.65-1.amzn2.0.2.x86_64                                         4/9
  Installing : generic-logos-httpd-18.0.0-4.amzn2.noarch                                     5/9
  Installing : mailcap-2.1.41-2.amzn2.noarch                                                 6/9
  Installing : httpd-filesystem-2.4.65-1.amzn2.0.2.noarch                                    7/9
  Installing : mod_http2-1.15.19-1.amzn2.0.2.x86_64                                          8/9
  Installing : httpd-2.4.65-1.amzn2.0.2.x86_64                                               9/9
  Verifying  : apr-1.7.2-1.amzn2.0.1.x86_64                                                  1/9
  Verifying  : apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64                                         2/9
  Verifying  : httpd-filesystem-2.4.65-1.amzn2.0.2.noarch                                    3/9
  Verifying  : httpd-tools-2.4.65-1.amzn2.0.2.x86_64                                         4/9
  Verifying  : mod_http2-1.15.19-1.amzn2.0.2.x86_64                                          5/9
  Verifying  : apr-util-1.6.3-1.amzn2.0.1.x86_64                                             6/9
  Verifying  : mailcap-2.1.41-2.amzn2.noarch                                                 7/9
  Verifying  : generic-logos-httpd-18.0.0-4.amzn2.noarch                                     8/9
  Verifying  : httpd-2.4.65-1.amzn2.0.2.x86_64                                               9/9

Installed:
  httpd.x86_64 0:2.4.65-1.amzn2.0.2

Dependency Installed:
  apr.x86_64 0:1.7.2-1.amzn2.0.1                  apr-util.x86_64 0:1.6.3-1.amzn2.0.1
  apr-util-bdb.x86_64 0:1.6.3-1.amzn2.0.1         generic-logos-httpd.noarch 0:18.0.0-4.amzn2
  httpd-filesystem.noarch 0:2.4.65-1.amzn2.0.2    httpd-tools.x86_64 0:2.4.65-1.amzn2.0.2
  mailcap.noarch 0:2.1.41-2.amzn2                 mod_http2.x86_64 0:1.15.19-1.amzn2.0.2

Complete!
```

El servidor web apache ha sido instalado.

Revertir software

Para checar el historial de actualizaciones ejecutamos *sudo yum history list*.

Este comando muestra un historial detallado de todas las acciones que se han realizado con el gestor de paquetes *yum*.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum history list
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
ID     | Command line             | Date and time    | Action(s)      | Altered
-------------------------------------------------------------------------------
     1 | install httpd -y         | 2025-12-22 16:01 | Install        |    9
history list
```

Podemos ver en el historial la instalación del servidor Apache.

Para ver información detallada de la instalación hacemos referencia con el ID (1) usando el comando *sudo yum history info 1*.

```
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum history info 1
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Transaction ID : 1
Begin time     : Mon Dec 22 16:01:13 2025
Begin rpmdb    : 455:326a1aa1bf1e6938879 1f99704e883746f29b947
End time       :            16:01:14 2025 (1 seconds)
End rpmdb      : 464:e7ec26c6bfe00c98f474ef850d6c99a5f9ac5fc2
User           : EC2 Default User <ec2-user>
Return-Code    : Success
Command Line   : install httpd -y
Transaction performed with:
    Installed     rpm-4.11.3-48.amzn2.0.5.x86_64 installed
    Installed     yum-3.4.3-158.amzn2.0.7.noarch installed
Packages Altered:
    Dep-Install apr-1.7.2-1.amzn2.0.1.x86_64               @amzn2-core
    Dep-Install apr-util-1.6.3-1.amzn2.0.1.x86_64          @amzn2-core
    Dep-Install apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64      @amzn2-core
    Dep-Install generic-logos-httpd-18.0.0-4.amzn2.noarch  @amzn2-core
    Install     httpd-2.4.65-1.amzn2.0.2.x86_64            @amzn2-core
    Dep-Install httpd-filesystem-2.4.65-1.amzn2.0.2.noarch @amzn2-core
    Dep-Install httpd-tools-2.4.65-1.amzn2.0.2.x86_64      @amzn2-core
    Dep-Install mailcap-2.1.41-2.amzn2.noarch              @amzn2-core
    Dep-Install mod_http2-1.15.19-1.amzn2.0.2.x86_64       @amzn2-core
history info
```

Se muestra información como la hora de inicio y fin, el usuario, el comando utilizado y la rpmdb.

Cuando se instala un programa, la rpmdb guarda:

- El nombre del paquete y su versión
- Qué archivos instaló y en qué carpetas están
- Las dependencias que necesita para funcionar
- Las fechas de instalación

Para revertir la instalación del servidor Apache ejecutamos el comando *sudo yum -y history undo 1*

ec2-user@ip-10-0-10-194:~/companyA

```
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum history list
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
ID     | Command line             | Date and time    | Action(s)      | Altered
-------------------------------------------------------------------------------
     1 | install httpd -y         | 2025-12-22 16:01 | Install        |    9
history list
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum history info 1
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Transaction ID : 1
Begin time     : Mon Dec 22 16:01:13 2025
Begin rpmdb    : 455:326a1aa1bf1e69388791f99704e883746f29b947
End time       :            16:01:14 2025 (1 seconds)
End rpmdb      : 464:e7ec26c6bfe00c98f474ef850d6c99a5f9ac5fc2
User           : EC2 Default User <ec2-user>
Return-Code    : Success
Command Line   : install httpd -y
Transaction performed with:
    Installed     rpm-4.11.3-48.amzn2.0.5.x86_64 installed
    Installed     yum-3.4.3-158.amzn2.0.7.noarch installed
Packages Altered:
    Dep-Install apr-1.7.2-1.amzn2.0.1.x86_64               @amzn2-core
    Dep-Install apr-util-1.6.3-1.amzn2.0.1.x86_64          @amzn2-core
    Dep-Install apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64      @amzn2-core
    Dep-Install generic-logos-httpd-18.0.0-4.amzn2.noarch  @amzn2-core
    Install     httpd-2.4.65-1.amzn2.0.2.x86_64            @amzn2-core
    Dep-Install httpd-filesystem-2.4.65-1.amzn2.0.2.noarch @amzn2-core
    Dep-Install httpd-tools-2.4.65-1.amzn2.0.2.x86_64      @amzn2-core
    Dep-Install mailcap-2.1.41-2.amzn2.noarch              @amzn2-core
    Dep-Install mod_http2-1.15.19-1.amzn2.0.2.x86_64       @amzn2-core
history info
[ec2-user@ip-10-0-10-194 companyA]$ clear
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum -y history undo 1
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
Undoing transaction 1, from Mon Dec 22 16:01:13 2025
    Dep-Install apr-1.7.2-1.amzn2.0.1.x86_64               @amzn2-core
    Dep-Install apr-util-1.6.3-1.amzn2.0.1.x86_64          @amzn2-core
    Dep-Install apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64      @amzn2-core
    Dep-Install generic-logos-httpd-18.0.0-4.amzn2.noarch  @amzn2-core
    Install     httpd-2.4.65-1.amzn2.0.2.x86_64            @amzn2-core
    Dep-Install httpd-filesystem-2.4.65-1.amzn2.0.2.noarch @amzn2-core
    Dep-Install httpd-tools-2.4.65-1.amzn2.0.2.x86_64      @amzn2-core
    Dep-Install mailcap-2.1.41-2.amzn2.noarch              @amzn2-core
    Dep-Install mod_http2-1.15.19-1.amzn2.0.2.x86_64       @amzn2-core
Resolving Dependencies
--> Running transaction check
---> Package apr.x86_64 0:1.7.2-1.amzn2.0.1 will be erased
---> Package apr-util.x86_64 0:1.6.3-1.amzn2.0.1 will be erased
---> Package apr-util-bdb.x86_64 0:1.6.3-1.amzn2.0.1 will be erased
---> Package generic-logos-httpd.noarch 0:18.0.0-4.amzn2 will be erased
---> Package httpd.x86_64 0:2.4.65-1.amzn2.0.2 will be erased
---> Package httpd-filesystem.noarch 0:2.4.65-1.amzn2.0.2 will be erased
---> Package httpd-tools.x86_64 0:2.4.65-1.amzn2.0.2 will be erased
---> Package mailcap.noarch 0:2.1.41-2.amzn2 will be erased
---> Package mod_http2.x86_64 0:1.15.19-1.amzn2.0.2 will be erased
--> Finished Dependency Resolution
amzn2-core/2/x86_64                                          | 3.6 kB  00:00:00
```

```
Dependencies Resolved

================================================================================================
 Package                    Arch          Version                      Repository          Size
================================================================================================
Removing:
 apr                        x86_64        1.7.2-1.amzn2.0.1            @amzn2-core        275 k
 apr-util                   x86_64        1.6.3-1.amzn2.0.1            @amzn2-core        206 k
 apr-util-bdb               x86_64        1.6.3-1.amzn2.0.1            @amzn2-core         11 k
 generic-logos-httpd        noarch        18.0.0-4.amzn2               @amzn2-core         21 k
 httpd                      x86_64        2.4.65-1.amzn2.0.2           @amzn2-core        4.2 M
 httpd-filesystem           noarch        2.4.65-1.amzn2.0.2           @amzn2-core        366
 httpd-tools                x86_64        2.4.65-1.amzn2.0.2           @amzn2-core        172 k
 mailcap                    noarch        2.1.41-2.amzn2               @amzn2-core         62 k
 mod_http2                  x86_64        1.15.19-1.amzn2.0.2          @amzn2-core        382 k

Transaction Summary
================================================================================================
Remove  9 Packages

Installed size: 5.3 M
Downloading packages:
Running transaction check
Running transaction test
Transaction test succeeded
Running transaction
  Erasing    : httpd-2.4.65-1.amzn2.0.2.x86_64                                                 1/9
  Erasing    : mod_http2-1.15.19-1.amzn2.0.2.x86_64                                            2/9
  Erasing    : mailcap-2.1.41-2.amzn2.noarch                                                   3/9
  Erasing    : httpd-filesystem-2.4.65-1.amzn2.0.2.noarch                                      4/9
  Erasing    : generic-logos-httpd-18.0.0-4.amzn2.noarch                                       5/9
  Erasing    : httpd-tools-2.4.65-1.amzn2.0.2.x86_64                                           6/9
  Erasing    : apr-util-1.6.3-1.amzn2.0.1.x86_64                                               7/9
  Erasing    : apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64                                           8/9
  Erasing    : apr-1.7.2-1.amzn2.0.1.x86_64                                                    9/9
  Verifying  : apr-1.7.2-1.amzn2.0.1.x86_64                                                    1/9
  Verifying  : apr-util-bdb-1.6.3-1.amzn2.0.1.x86_64                                           2/9
  Verifying  : httpd-filesystem-2.4.65-1.amzn2.0.2.noarch                                      3/9
  Verifying  : httpd-tools-2.4.65-1.amzn2.0.2.x86_64                                           4/9
  Verifying  : mod_http2-1.15.19-1.amzn2.0.2.x86_64                                            5/9
  Verifying  : apr-util-1.6.3-1.amzn2.0.1.x86_64                                               6/9
  Verifying  : mailcap-2.1.41-2.amzn2.noarch                                                   7/9
  Verifying  : generic-logos-httpd-18.0.0-4.amzn2.noarch                                       8/9
  Verifying  : httpd-2.4.65-1.amzn2.0.2.x86_64                                                 9/9

Removed:
  apr.x86_64 0:1.7.2-1.amzn2.0.1              apr-util.x86_64 0:1.6.3-1.amzn2.0.1
  apr-util-bdb.x86_64 0:1.6.3-1.amzn2.0.1     generic-logos-httpd.noarch 0:18.0.0-4.amzn2
  httpd.x86_64 0:2.4.65-1.amzn2.0.2           httpd-filesystem.noarch 0:2.4.65-1.amzn2.0.2
  httpd-tools.x86_64 0:2.4.65-1.amzn2.0.2     mailcap.noarch 0:2.1.41-2.amzn2
  mod_http2.x86_64 0:1.15.19-1.amzn2.0.2

Complete!
```

Verificamos nuevamente el historial de yum.

Ahora aparece la instalación y cuando lo revertimos.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo yum history list
Loaded plugins: extras_suggestions, langpacks, priorities, update-motd
ID     | Command line             | Date and time    | Action(s)      | Altered
-------------------------------------------------------------------------------
     2 | -y history undo 1        | 2025-12-22 16:10 | Erase          |    9
     1 | install httpd -y         | 2025-12-22 16:01 | Install        |    9
history list
```

Instalar AWS CLI en Linux Red Hat

Para instalar AWS CLI se requiere tener instalado Pyhton, debido a que el CLI está escrito íntegramente en este lenguaje.

Verificamos la versión de Python instalada con *python3 –version*.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ python3 --version
Python 3.7.16
```

Para poder instalar AWS CLI se requiere tener instalada la versión de Python 2.6.5 o superior, o versión 3.3.

Pip3 es el gestor de paquetes estándar para Python 3. Es una herramienta de línea de comandos que permite buscar, descargar e instalar librerías y software adicional que no viene incluido en la instalación básica de Python.

Para verificar la versión instalada de pip3 ejecutamos pip3 –version.

```
[ec2-user@ip-10-0-10-194 companyA]$ pip3 --version
pip 20.2.2 from /usr/lib/python3.7/site-packages/pip (python 3.7)
```

Ahora descargamos el archivo de instalación de AWS CLI con el comando *curl*.

El comando *curl* se usa para transferir datos desde o hacia un servidor, utilizando una gran variedad de protocolos (como HTTP, HTTPS, FTP, SFTP, etc.).

curl -o [nombre_del_archivo_local] [URL_del_recurso]

La opción -o sirve para indicar el nombre que le daremos al archivo en local.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ curl "https://awscli.amazonaws.com/awscli-exe-linux-x86_64.zip" -
o "awscliv2.zip"
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left  Speed
100 60.2M  100 60.2M    0     0   324M      0 --:--:-- --:--:-- --:--:--  325M
```

Hemos denominado el archivo descargado "awscliv2.zip".

Verificamos que el archivo se ha descargado.

```
[ec2-user@ip-10-0-10-194 companyA]$ ls
awscliv2.zip  Documents  FolderListing.csv  Management  Sales          Shipping
CEO           Employees  HR                  Roster.csv  SharedFolders
```

Ahora descomprimimos el archivo con el comando *unzip awscliv2.zip*

Esto descomprime la carpeta aws con el instalador de AWS CLI.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ ls
aws           CEO        Employees          HR          Roster.csv  SharedFolders
awscliv2.zip  Documents  FolderListing.csv  Management  Sales       Shipping
[ec2-user@ip-10-0-10-194 companyA]$ ls aws
dist  install  README.md  THIRD_PARTY_LICENSES
```

Ejecutamos el instalador con sudo ./aws/install

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo ./aws/install
You can now run: /usr/local/bin/aws --version
```

Para verificar la instalación ejecutamos *aws help*.

Este comando muestra información de ayuda de AWS CLI.

```
[ec2-user@ip-10-0-10-194 companyA]$ aws help
AWS()                                                                    AWS()



NAME
       aws -

DESCRIPTION
       The  AWS  Command  Line  Interface is a unified tool to manage your AWS
       services.

SYNOPSIS
          aws [options] <command> <subcommand> [parameters]

       Use aws command help for information on a  specific  command.  Use  aws
       help  topics  to view a list of available help topics. The synopsis for
       each command shows its parameters and their usage. Optional  parameters
       are shown in square brackets.

GLOBAL OPTIONS
       --debug (boolean)

       Turn on debug logging.

       --endpoint-url (string)

       Override command's default URL with the given URL.

       --no-verify-ssl (boolean)
```

Para salir de help tecleamos q.

Configurar el AWS CLI para conectar con una cuenta de AWS

Ahora configuraremos los datos de acceso al AWS CLI con el comando *aws configure* y los siguientes datos:

AWS Access Key ID: dejar en blanco

AWS Access Key ID: dejar en blanco

Default region name: "us-west-2"

Default output format: "json"

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ aws configure
AWS Access Key ID [None]:
AWS Secret Access Key [None]:
Default region name [None]: us-west-2
Default output format [None]: json
```

Abrimos el archivo credentials con el editor de texto nano, para capturar el AWS access key ID, AWS secret access key y el AWS sesion token.

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ sudo nano ~/.aws/credentials
```

Pegamos los datos de acceso.

```
ec2-user@ip-10-0-10-194:~/companyA
  GNU nano 2.9.8                /home/ec2-user/.aws/credentials                Modified

$ptuvsTRkfvrUpacmlubNFl0ubVP9M9AEFioOMmN5C6Fy8+kcZPlfezxA+w==
```

Teclamos CTRL+O y Enter para guardar, y CTRL+X para salir.

Nos dirigimos a la consola de administración de AWS para obtener el ID de la instancia.

En la barra de búsqueda tecleamos “EC2” y hacemos clic en EC2.

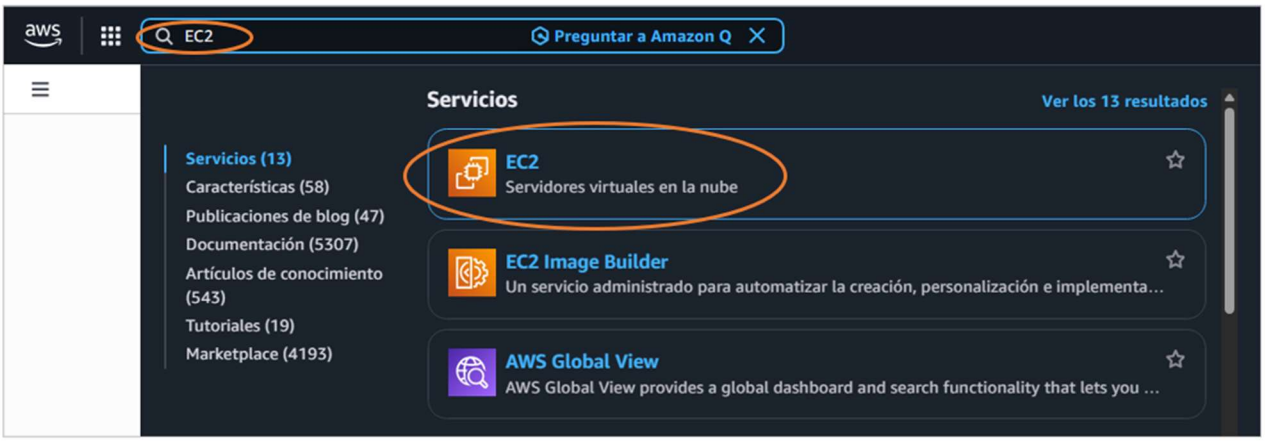

En el panel izquierdo hacemos clic en Instancias.

Seleccionamos la instancia “Command Host” y obtenemos el ID de la instancia.

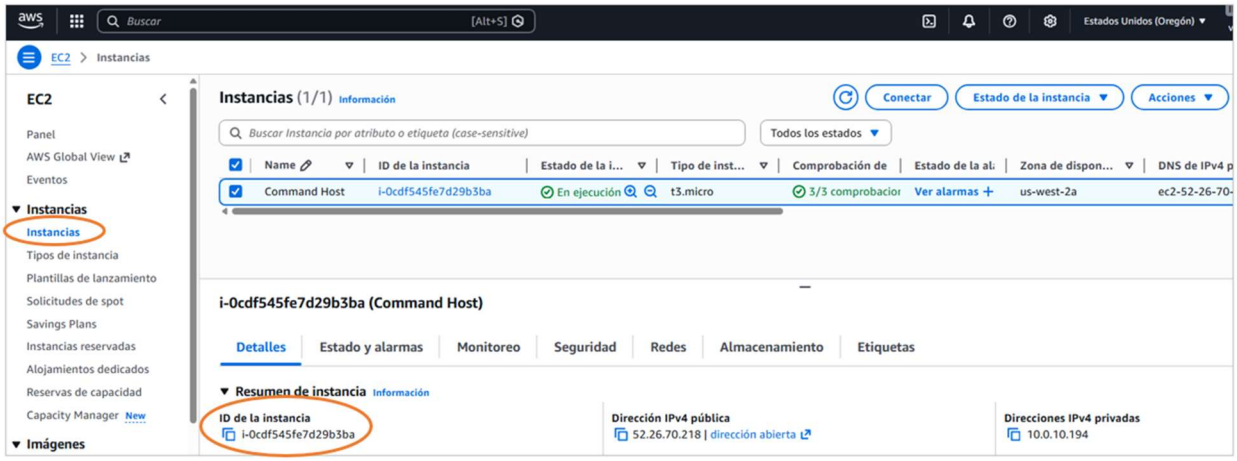

Con el ID de la instancia, en la terminal ejecutamos el siguiente comando:

aws ec2 describe-instance-attribute --instance-id i-0cdf545fe7d29b3ba --attribute instanceType

El comando *describe-instance-attribute* sirve para consultar un detalle técnico concreto de la instancia con el ID especificado. En este caso, el detalle consultado es el tipo de instancia (t3.micro).

Con la opción --instance-id se especifica el ID de la instancia.

Con la opción *--attribute* se especifica la información que queremos obtener (el tipo de instancia).

```
ec2-user@ip-10-0-10-194:~/companyA
[ec2-user@ip-10-0-10-194 companyA]$ aws ec2 describe-instance-attribute --instance-id i-0cdf545fe7d29
b3ba  --attribute instanceType
{
    "InstanceId": "i-0cdf545fe7d29b3ba",
    "InstanceType": {
        "Value": "t3.micro"
    }
}
```

La instancia es de tipo t3.micro.
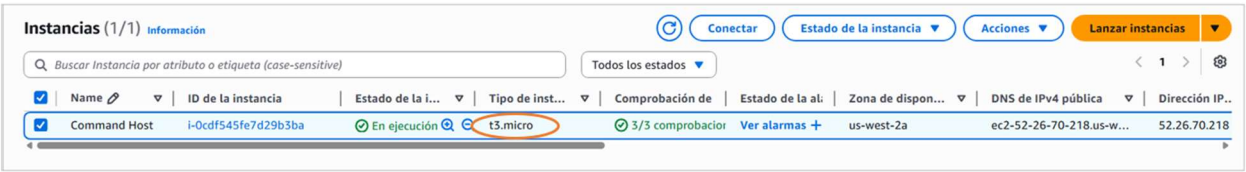
Verificamos en la consola de administración de AWS el tipo de instancia.