

Citrix Cloud aka Citrix Virtual Apps and Desktops service V1 Documentation Script ReadMe

NOTE: This script requires PowerShell V5 or later.

Support for non-English Versions of Microsoft Word

The script supports the following languages:

- Catalan
- Chinese
- Danish
- Dutch
- English
- Finnish
- French
- German
- Norwegian
- Portuguese
- Spanish
- Swedish

Prerequisites

Let us ensure we have the requirements before using PowerShell to document anything in a Citrix Virtual Apps and Desktops service (CVADS) Site.

Thanks to Ferroque Systems for their help in updating this section.

Note: The following items must be completed on the computer running this script.

1. Verify script execution is Enabled. By default, PowerShell script execution is blocked.
 - a. Start, Run, gpedit.msc
 - b. Computer Configuration/Administrative Templates/Windows Components/Windows PowerShell/Turn on Script Execution: Enabled
 - c. Execution Policy: select the option that follows your recommended security practices.
2. The script can be run from a non-domain or domain-joined computer.
3. Install the Remote PowerShell SDK.
 - a. <https://download.apps.cloud.com/CitrixPoshSdk.exe>
 - b. Do not install the Remote PowerShell SDK on a computer running the Cloud Connector.
 - c. Do not install the Remote PowerShell SDK on a computer running the on-premises version of Studio, or that has the on-premises PowerShell snap-ins or modules installed.
 - d. You must restart the computer after the installation.
4. Verify that the Visual C++ Runtimes are installed.
 - a. Option 1: Install from the CVAD 2511 or later installation media
 - i. x:\Support\VcRedist\vc_redist_x86.exe (install first)
 - ii. x:\Support\VcRedist\vc_redist_x64.exe
 - b. Option2: Install from the Microsoft download page
 - i. https://aka.ms/vc14/vc_redist.x86.ex (install first)
 - ii. https://aka.ms/vc14/vc_redist.x64.exe
5. Install the Citrix Group Policy Management Console
 - a. **NOTE: The Visual C++ Runtimes MUST be installed BEFORE the Group Policy Management Console.**
 - b. Option 1: Install from the CVAD 2511 or later installation media. **Note that the StoreFront and Citrix Policy cmdlets and functions require this.**
 - i. x:\x64\Citrix Policy\CitrixGroupPolicyManagement_x64.msi
 - ii. Installing this console also installs the required Citrix components.
 - c. Option 2: Install from <https://www.citrix.com/downloads/citrix-cloud/product-software/xenapp-and-xendesktop-service.html>. **Note that the StoreFront and Citrix Policy cmdlets and functions require this.**
 - i. This downloads the latest CitrixGroupPolicyManagement_x64.msi.
 - ii. Installing this console also installs the required Citrix components.

Authentication

Thanks to Ferroque Systems for their help in updating this section.

1. Run the following steps from any computer, preferably the computer running the Citrix Cloud documentation script.
2. In your internet browser, go to Citrix.Cloud.com, authenticate, and select the appropriate account if required.
3. Click the "hamburger" menu in the upper left corner, as shown in Figure 1.




Figure 1

4. Select *Identity and Access Management*, as shown in Figure 2.

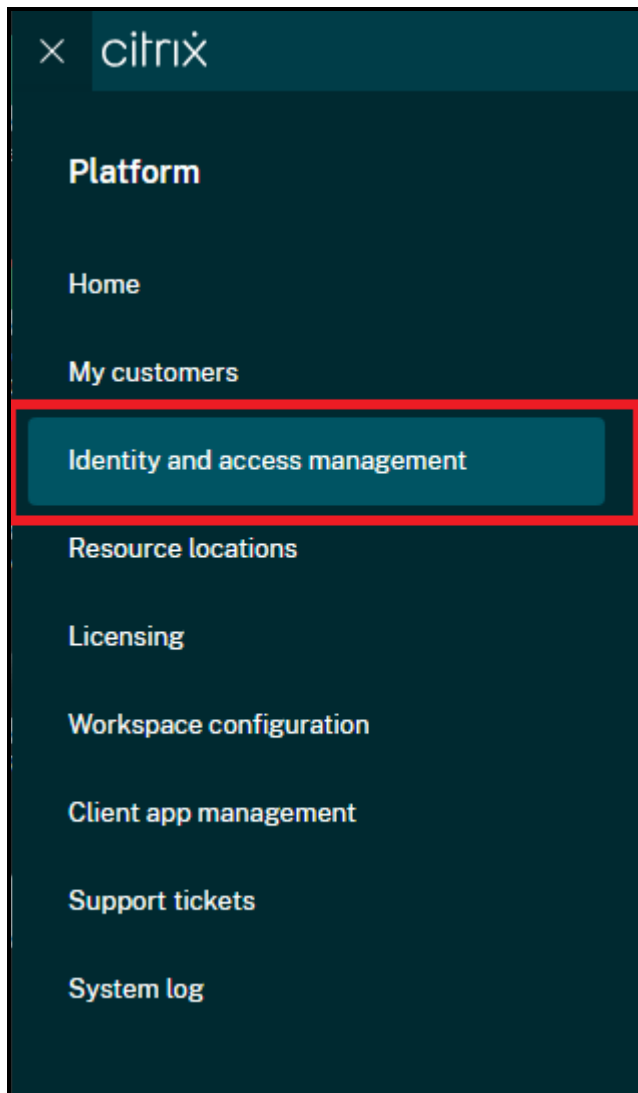


Figure 2

5. Click *Create Client*, as shown in Figure 3.

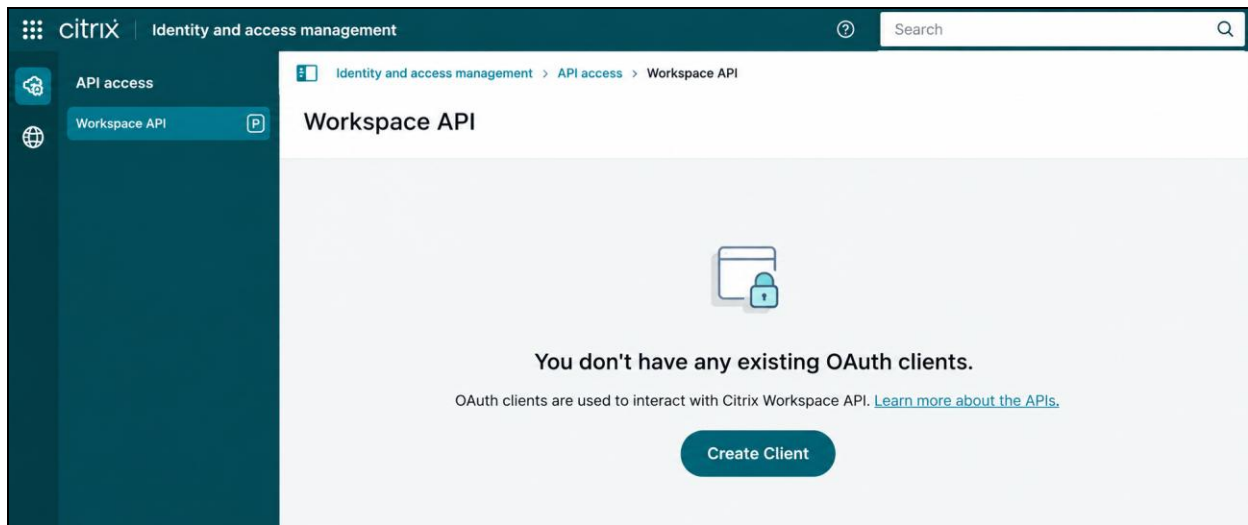


Figure 3

6. Enter the following information, as shown in Figure 4.
 - a. Display Name
 - b. Owner Contact
 - c. Client type: Private Client
 - d. Require users to accept consent when accessing this client: No
 - e. Require Proof Key: No
 - f. Will the consuming Application require Offline Access: Yes
 - g. Allowed Redirect URLs: Add <https://localhost:7182/callback>
 - h. Click *Create*.

Create a new OAuth Client

Display Name
Enter a friendly name to identify this client.

Citrix Cloud Documentation Script

Owner Contact
Enter an email address to receive notifications about this client.

cwebster@

Client type

☐ Public Client
You won't have a Client Secret, and this client never expires.

☒ Private Client
Securely authenticate with a Client Secret. This client is valid for 90 days, and you will need to rotate the secret before it expires to extend usage.

Require users to accept consent when accessing this client?

☐ Yes ☒ No

Require Proof Key?

☐ Yes ☒ No

Will the consuming Application require Offline Access?

☒ Yes ☐ No

Allowed Redirect URLs

Enter allowed redirect URL

Add

Clear

URLs

https://localhost:7182/callback

Create

Cancel

Figure 4

- Note:** You only get one chance to download the secureclient.csv file.
- Copy the ID and Secret to your preferred password manager, then click Download, as shown in Figure 5. Save the workspaceapiclientsecret.csv file to a location you can use when running the

script.

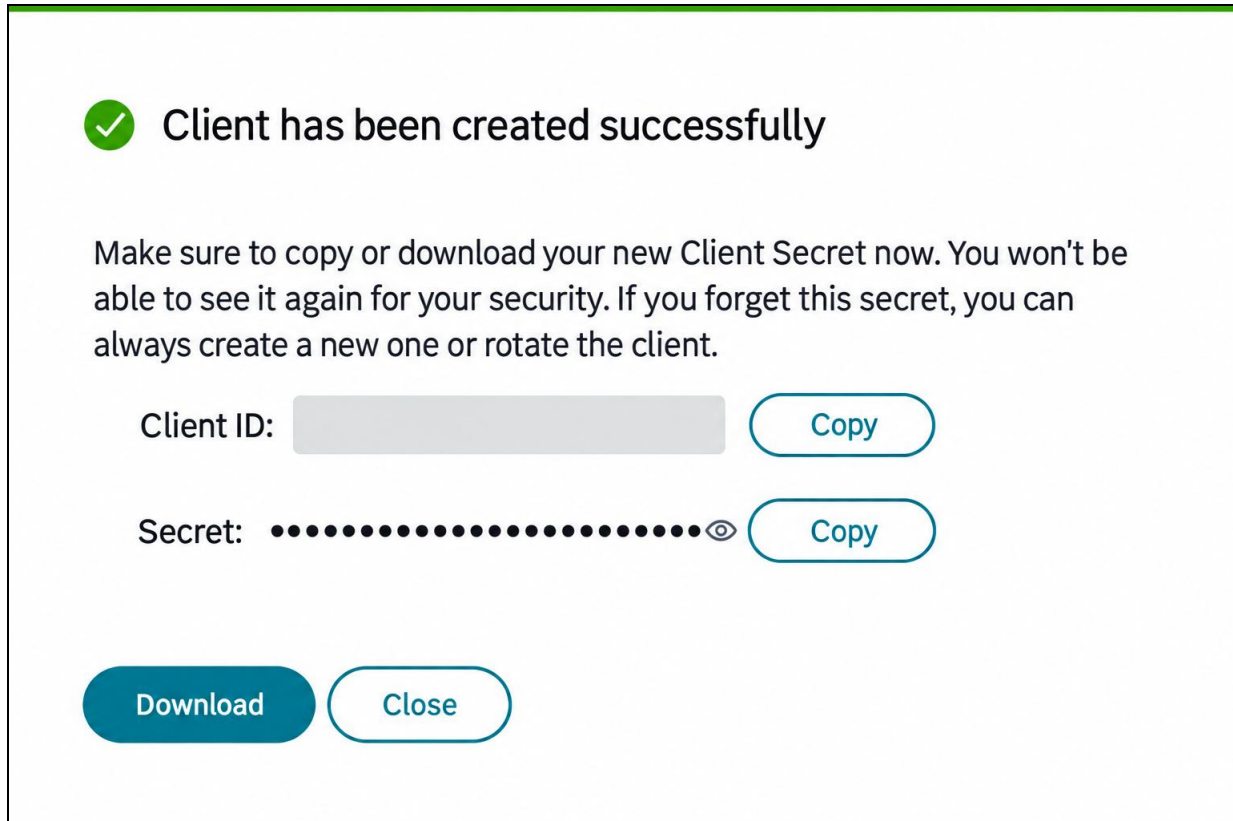


Figure 5

9. **Note:** You can copy the workspaceapiclientsecret.csv file to multiple computers for use with the Citrix Cloud documentation script.
10. **Make a note of the Customer ID blanked out and circled in red in Figure 6. You need the Customer ID for Step 13 below.**



Figure 6

11. Exit your Internet browser.
12. Next, from an elevated PowerShell session, run **Add-PSSnapin *citrix***

13. Next, from the elevated PowerShell session, run the following command.

- a. **Set-XDCredentials -CustomerID "Customer ID from Step 10"**
-SecureClientFile "C:\Location\workspaceapiclientsecret.csv" -ProfileType
CloudAPI -StoreAs "Default"

Note: On every computer you want to run the script, you must run the Set-XDCredentials cmdlet first.

Script Usage

How to use this script?

1. Save the script as `CC_Inventory_V1.ps1` in your PowerShell scripts folder.
2. Follow the process in the previous Authentication section to create an authentication profile.
3. Change to your PowerShell scripts folder from a new elevated PowerShell prompt.
 - a. Note: The script author recommends you run the script from a NEW elevated PowerShell session each time.
4. From the PowerShell prompt, type in:
 - a. `.\CC_Inventory_V1.ps1 -ProfileName "Example_1"` and press Enter.
5. By default, the script creates an HTML document named after the CVADS Site, which is cloudxdsite. Use the `-SiteName` parameter to specify a name for the report file.
6. If you use the `-MSWord` option, the script creates a Microsoft Word file named after the CVADS Site, which is cloudxdsite. Use the `-SiteName` parameter to specify a name for the report file.
7. If you use the `-PDF` option, the script creates a PDF file named after the CVADS Site, which is cloudxdsite. Use the `-SiteName` parameter to specify a name for the report file.
8. If you use the `-Text` option, the script creates a Text file named after the CVADS Site, which is cloudxdsite. Use the `-SiteName` parameter to specify a name for the report file.

To run the script:

`.\CC_Inventory_V1.ps1 -ProfileName "Example_1"` and press Enter.

Full help text is available.

Get-Help `.\CC_Inventory_V1.ps1 -full`

The help text explains all the parameters the script accepts.

Help text

NAME

C:\PSScript0\CC_Inventory_V1.ps1

SYNOPSIS

Creates an inventory of a Citrix Cloud (now DaaS) Site.

SYNTAX

```
C:\PSScript0\CC_Inventory_V1.ps1 [-HTML] [-Text] [-ProfileName <String>] [-SiteName <String>] [-MaxDetails] [-Administrators] [-Applications] [-DeliveryGroups] [-DeliveryGroupsUtilization] [-Hosting] [-Logging] [-StartDate <DateTime>] [-EndDate <DateTime>] [-MachineCatalogs] [-NoADPolicies] [-NoPolicies] [-NoSessions] [-Policies] [-StoreFront] [-VDARegistryKeys] [-Section <String[]>] [-AddDateTime] [-CSV] [-Dev] [-Folder <String>] [-Log] [-ScriptInfo] [-ReportFooter] [-MSWord] [-PDF] [-CompanyAddress <String>] [-CompanyEmail <String>] [-CompanyFax <String>] [-CompanyName <String>] [-CompanyPhone <String>] [-CoverPage <String>] [-UserName <String>] [-SmtpServer <String>] [-SmtpPort <Int32>] [-UseSSL] [-From <String>] [-To <String>] [<CommonParameters>]
```

DESCRIPTION

Creates an inventory of a Citrix Cloud (now DaaS) Site using Microsoft PowerShell, Word, plain text, or HTML.

This script requires at least PowerShell version 5.

The default output is HTML.

Run this script on a computer with the Remote SDK installed.

<https://download.apps.cloud.com/CitrixPoshSdk.exe>

or

<https://www.citrix.com/downloads/citrix-cloud/product-software/xenapp-and-xendesktop-service.html>

This script was developed and run from two Windows 10 VMs. One was domain-joined and the other was in a Workgroup.

This script supports only Citrix Cloud (now DaaS), not the on-premises CVAD products.

If you are running XA/XD 7.0 through 7.7, please use:

<https://github.com/CarlWebster/Citrix-XenApp-XenDesktop-7-V1>

If you are running XA/XD 7.8 through CVAD 2006, please use:

<https://github.com/CarlWebster/Citrix-XenApp-XenDesktop-7-V2>

If you are running CVAD 2006 through 2511, please use:

<https://github.com/CarlWebster/Citrix-Virtual-Apps-and-Desktops-V3>

If you are running CVAD 2511 or later, please use:

<https://github.com/CarlWebster/Citrix-Virtual-Apps-and-Desktops-V4>

To prevent multiple Citrix Cloud (now DaaS) authentication prompts, follow the instructions in the Authentication section of the ReadMe file to create a profile named Default.

ReadMe file:

https://github.com/CarlWebster/Citrix-Cloud-DaaS-/blob/main/CC_Inventory_V1_ReadMe.pdf

By default, the script only gives summary information for:

- Administrators
- App-V Publishing
- Application Groups
- Applications
- Delivery Groups
- Hosting
- Logging
- Machine Catalogs
- Policies
- StoreFront
- Zones

The Summary information is what is shown in the top half of Citrix Studio for:

- Machine Catalogs
- Delivery Groups
- Applications
- Policies
- Logging
- Administrators
- Hosting
- StoreFront
- App-V Publishing
- Zones

Using the MachineCatalogs parameter can cause the report to take a very long time to complete and can generate an extremely long report.

Using the DeliveryGroups parameter can cause the report to take a very long time to complete and can generate an extremely long report.

Using both the MachineCatalogs and DeliveryGroups parameters can cause the report to take an extremely long time to complete and generate an exceptionally long report.

Creates an output file named after the Citrix Cloud (now DaaS) Site (which by default is cloudxdsite) unless you use the SiteName parameter.

Word and PDF documents include a Cover Page, Table of Contents, and Footer.

Includes support for the following language versions of Microsoft Word:

- Catalan
- Chinese
- Danish
- Dutch
- English
- Finnish
- French
- German
- Norwegian
- Portuguese
- Spanish
- Swedish

PARAMETERS

-HTML [<SwitchParameter>]

Creates an HTML file with an.html extension.

This parameter is set to True if no other output format is selected.

Required?	false
Position?	named

Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Text [<SwitchParameter>]

Creates a formatted text file with a.txt extension.
This parameter is disabled by default.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-ProfileName <String>

The profile name to use for Get-XDAuthentication.

The name associated with a set of credentials in the local store that are to be read.

You must follow the Process in either the ReadMe file or your own Process to capture the Client ID and Client Secret and save them to a CSV credential profile.

ReadMe file:

https://github.com/CarlWebster/Citrix-Cloud-DaaS-/blob/main/CC_Inventory_V1_ReadMe.pdf

To prevent multiple Citrix Cloud (now DaaS) authentication prompts, create a profile named Default.

This parameter is blank by default.
This parameter has an alias of PN.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-SiteName <String>

Site Name to use for all output files.

The default is "cloudxdsite".
This parameter has an alias of SN.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-MaxDetails [<SwitchParameter>]

Adds maximum detail to the report.

This is the same as using the following parameters:

- Administrators
- Applications
- DeliveryGroups
- Hosting
- Logging
- MachineCatalogs
- Policies
- StoreFront
- VDARegistryKeys

Does not change the value of NoADPolicies.
Does not change the value of NoSessions.

WARNING: Using this parameter can create an extremely large report and can take a very long time to run.

This parameter has an alias of MAX.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Administrators [<SwitchParameter>]

Give detailed information for Administrator Scopes and Roles.
This parameter is disabled by default.
This parameter has an alias of Admins.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Applications [<SwitchParameter>]

Gives detailed information for all applications.
This parameter is disabled by default.
This parameter has an alias of Apps.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-DeliveryGroups [<SwitchParameter>]

Gives detailed information on all desktops in all Desktop (Delivery) Groups.

Using the DeliveryGroups parameter can cause the report to take a very long time to complete and can generate an extremely long report.

Using both the MachineCatalogs and DeliveryGroups parameters can cause the report to take an extremely long time to complete and generate an exceptionally long report.

This parameter is disabled by default.
This parameter has an alias of DG.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-DeliveryGroupsUtilization [<SwitchParameter>]

Gives a chart with the delivery group utilization for the last 7 days depending on the information in the database.

This option is only available when the report is generated in Word and requires Microsoft Excel to be locally installed.

Using the DeliveryGroupsUtilization parameter causes the report to take a longer time to complete and generates a longer report.

This parameter is disabled by default.
This parameter has an alias of DGU.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Hosting [<SwitchParameter>]
Give detailed information for Hosts, Host Connections, and Resources.

This parameter is disabled by default.
This parameter has an alias of Host.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Logging [<SwitchParameter>]
Give the Configuration Logging report with, by default, details for the previous seven days.

For Citrix Cloud, there are no Logging preferences or information about the logging database.

This parameter is disabled by default.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-StartDate <DateTime>
The start date for the Configuration Logging report.

The format for date only is MM/DD/YYYY.

Format to include a specific time range is "MM/DD/YYYY HH:MM:SS" in 24-hour format.
The double quotes are needed.

The default is today's date minus seven days.
This parameter has an alias of SD.

Required?	false
Position?	named
Default value	((Get-Date -displayhint date).AddDays(-7))
Accept pipeline input?	false
Accept wildcard characters?	false

-EndDate <DateTime>
The end date for the Configuration Logging report.

The format for date only is MM/DD/YYYY.

Format to include a specific time range is "MM/DD/YYYY HH:MM:SS" in 24-hour format.
The double quotes are needed.

The default is today's date.
This parameter has an alias of ED.

Required?	false
Position?	named
Default value	(Get-Date -displayhint date)
Accept pipeline input?	false
Accept wildcard characters?	false

-MachineCatalogs [<SwitchParameter>]

Gives detailed information for all machines in all Machine Catalogs.

Using the MachineCatalogs parameter can cause the report to take a very long time to complete and can generate an extremely long report.

Using both the MachineCatalogs and DeliveryGroups parameters can cause the report to take an extremely long time to complete and generate an exceptionally long report.

This parameter is disabled by default.
This parameter has an alias of MC.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-NoADPolicies [<SwitchParameter>]

Excludes all Citrix AD-based policy information from the output document.
Includes only Site policies created in Studio.

This Switch is useful in large AD environments, where there may be thousands of policies to keep SYSVOL from being searched.

This parameter is disabled by default.
This parameter has an alias of NoAD.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-NoPolicies [<SwitchParameter>]

Excludes all Site and Citrix AD-based policy information from the output document.

Using the NoPolicies parameter will cause the Policies parameter to be set to False.

This parameter is disabled by default.
This parameter has an alias of NP.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-NoSessions [<SwitchParameter>]

Excludes Machine Catalog, Application, and Hosting session data from the report.

Using the MaxDetails parameter does not change this setting.

This parameter is disabled by default.
This parameter has an alias of NS.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Policies [<SwitchParameter>]

Give detailed information for both Site and Citrix AD-based Policies.

Using the Policies parameter can cause the report to take a very long time to complete and can generate an extremely long report.

There are three related parameters: Policies, NoPolicies, and NoADPolicies.

Policies and NoPolicies are mutually exclusive, and priority is given to NoPolicies.

This parameter is disabled by default.
This parameter has an alias of Pol.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-StoreFront [<SwitchParameter>]

Give detailed information for StoreFront.

This parameter is disabled by default.
This parameter has an alias of SF.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-VDARegistryKeys [<SwitchParameter>]

Adds information on registry keys to the Machine Details section.

If this parameter is used, MachineCatalogs is set to True.

This parameter is disabled by default.
This parameter has an alias of VRK.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Section <String[]>

Processes one or more sections of the report.

Valid options are:

- Admins (Administrators)
- Apps (Applications and Application Group Details)
- Catalogs (Machine Catalogs)
- Config (Configuration)
- Groups (Delivery Groups)
- Hosting

Licensing
Logging
Policies
StoreFront
Zones
All

This parameter defaults to All sections.

Multiple sections are separated by a comma. -Section catalogs, groups

Notes:

Using Logging will force the Logging Switch to True.

Using Policies will force the Policies Switch to True.

If Policies is selected and the NoPolicies Switch is used, the script will terminate.

Required?	false
Position?	named
Default value	All
Accept pipeline input?	false
Accept wildcard characters?	false

-AddDateTime [<SwitchParameter>]

Adds a date timestamp to the end of the file name.

The timestamp is in the format of yyyy-MM-dd_HH:mm.

June 1, 2027, at 6 PM is 2027-06-01_1800.

The output filename will be ReportName_2027-06-01_1800.docx (or.pdf).

This parameter is disabled by default.

This parameter has an alias of ADT.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-CSV [<SwitchParameter>]

Will create a CSV file for each Appendix.

The default value is False.

Output CSV filename is in the format:

CCSiteName_Documentation_Appendix#_NameOfAppendix.csv

For example:

CCSiteName_Documentation_AppendixA_VDARegistryItems.csv

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Dev [<SwitchParameter>]

Clears errors at the beginning of the script.

Outputs all errors to a text file at the end of the script.

This is used when the script developer requests more troubleshooting data.

The text file is placed in the same folder from where the script runs.

This parameter is disabled by default.

Required?	false
-----------	-------

Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-Folder <String>
Specifies the optional output folder to save the output report.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-Log [<SwitchParameter>]
Generates a log file for troubleshooting.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-ScriptInfo [<SwitchParameter>]
Outputs information about the script to a text file.
The text file is placed in the same folder from where the script runs.

This parameter is disabled by default.
This parameter has an alias of SI.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-ReportFooter [<SwitchParameter>]
Outputs a footer section at the end of the report.

This parameter has an alias of RF.

Report Footer

Report information:

Created with: <Script Name> - Release Date: <Script Release Date>
Script version: <Script Version>
Started on <Date Time in Local Format>
Elapsed time: nn days, nn hours, nn minutes, nn.nn seconds
Ran from domain <Domain Name> by user <Username>
Ran from the folder <Folder Name>

Script Name and Script Release date are script-specific variables.
Start Date Time in Local Format is a script variable.
Elapsed time is a calculated value.
Domain Name is \$env:USERDNSDOMAIN.
Username is \$env:USERNAME.
Folder Name is a script variable.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-MSWord [<SwitchParameter>]
 SaveAs DOCX file
 This parameter is disabled by default.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-PDF [<SwitchParameter>]
 SaveAs PDF file instead of DOCX file.
 This parameter is disabled by default.
 The PDF file is roughly 5X to 10X larger than the DOCX file.
 This parameter requires Microsoft Word to be installed.
 This parameter uses the Word SaveAs PDF capability.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-CompanyAddress <String>
 Company Address to use for the Cover Page if the Cover Page has the Address field.

The following Cover Pages have an Address field:

- Banded (Word 2013/2016)
- Contrast (Word 2010)
- Exposure (Word 2010)
- Filigree (Word 2013/2016)
- Ion (Dark) (Word 2013/2016)
- Retrospect (Word 2013/2016)
- Semaphore (Word 2013/2016)
- Tiles (Word 2010)
- ViewMaster (Word 2013/2016)

This parameter is only valid with the MSWORD and PDF output parameters.
 This parameter has an alias of CA.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-CompanyEmail <String>
 Company Email to use for the Cover Page if the Cover Page has the Email field.

The following Cover Pages have an Email field:

- Facet (Word 2013/2016)

This parameter is only valid with the MSWORD and PDF output parameters.
 This parameter has an alias of CE.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-CompanyFax <String>
 Company Fax to use for the Cover Page if the Cover Page has the Fax field.

The following Cover Pages have a Fax field:

Contrast (Word 2010)
Exposure (Word 2010)

This parameter is only valid with the MSWORD and PDF output parameters.
This parameter has an alias of CF.

Required? false
Position? named
Default value
Accept pipeline input? false
Accept wildcard characters? false

-CompanyName <String>

Company Name to use for the Cover Page.

The default value is contained in

HKCU:\Software\Microsoft\Office\Common\UserInfo\CompanyName or

HKCU:\Software\Microsoft\Office\Common\UserInfo\Company, whichever is populated
on the computer running the script.

This parameter is only valid with the MSWORD and PDF output parameters.
This parameter has an alias of CN.

Required? false
Position? named
Default value
Accept pipeline input? false
Accept wildcard characters? false

-CompanyPhone <String>

Company Phone to use for the Cover Page if the Cover Page has the Phone field.

The following Cover Pages have a Phone field:

Contrast (Word 2010)
Exposure (Word 2010)

This parameter is only valid with the MSWORD and PDF output parameters.
This parameter has an alias of CPh.

Required? false
Position? named
Default value
Accept pipeline input? false
Accept wildcard characters? false

-CoverPage <String>

What Microsoft Word Cover Page to use.

Only Word 2010, 2013 and 2016 are supported.

(default cover pages in Word en-US)

Valid input is:

Alphabet (Word 2010. Works)
Annual (Word 2010. Doesn't work well for this report)
Austere (Word 2010. Works)
Austin (Word 2010/2013/2016. Doesn't work in 2013 or 2016, mostly
works in 2010, but Subtitle/Subject & Author fields need moving
after the title box is moved up)
Banded (Word 2013/2016. Works)
Conservative (Word 2010. Works)
Contrast (Word 2010. Works)
Cubicles (Word 2010. Works)
Exposure (Word 2010. Works if you like looking sideways)

Facet (Word 2013/2016. Works)
 Filigree (Word 2013/2016. Works)
 Grid (Word 2010/2013/2016. Works in 2010)
 Integral (Word 2013/2016. Works)
 Ion (Dark) (Word 2013/2016. Top date doesn't fit; box needs to be manually resized or font changed to 8 point)
 Ion (Light) (Word 2013/2016. Top date doesn't fit; box needs to be manually resized or font changed to 8 point)
 Mod (Word 2010. Works)
 Motion (Word 2010/2013/2016. Works if top date is manually changed to 36 point)
 Newsprint (Word 2010. Works but date is not populated)
 Perspective (Word 2010. Works)
 Pinstripes (Word 2010. Works)
 Puzzle (Word 2010. Top date doesn't fit; box needs to be manually resized or font changed to 14 point)
 Retrospect (Word 2013/2016. Works)
 Semaphore (Word 2013/2016. Works)
 Sideline (Word 2010/2013/2016. Doesn't work in 2013 or 2016, works in 2010)
 Slice (Dark) (Word 2013/2016. Doesn't work)
 Slice (Light) (Word 2013/2016. Doesn't work)
 Stacks (Word 2010. Works)
 Tiles (Word 2010. Date doesn't fit unless changed to 26 point)
 Transcend (Word 2010. Works)
 ViewMaster (Word 2013/2016. Works)
 Whisp (Word 2013/2016. Works)

The default value is Sideline.
 This parameter has an alias of CP.
 This parameter is only valid with the MSWORD and PDF output parameters.

Required?	false
Position?	named
Default value	Sideline
Accept pipeline input?	false
Accept wildcard characters?	false

-UserName <String>
 Username to use for the Cover Page and Footer.
 The default value is contained in \$env:username
 This parameter has an alias of UN.
 This parameter is only valid with the MSWORD and PDF output parameters.

Required?	false
Position?	named
Default value	\$env:username
Accept pipeline input?	false
Accept wildcard characters?	false

-SmtpServer <String>
 Specifies the optional email server to send the output report.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-SmtpPort <Int32>
 Specifies the SMTP port.
 The default is 25.

Required?	false
Position?	named
Default value	25
Accept pipeline input?	false
Accept wildcard characters?	false

-UseSSL [<SwitchParameter>]
Specifies whether to use SSL for the SmtptServer.
The default is False.

Required?	false
Position?	named
Default value	False
Accept pipeline input?	false
Accept wildcard characters?	false

-From <String>
Specifies the username for the From email address.
If SmtptServer is used, this is a required parameter.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

-To <String>
Specifies the username for the To email address.
If SmtptServer is used, this is a required parameter.

Required?	false
Position?	named
Default value	
Accept pipeline input?	false
Accept wildcard characters?	false

<CommonParameters>
This cmdlet supports the common parameters: Verbose, Debug, ErrorAction, ErrorVariable, WarningAction, WarningVariable, OutBuffer, PipelineVariable, and OutVariable. For more information, see about_CommonParameters (<https://go.microsoft.com/fwlink/?LinkID=113216>).

INPUTS

None. You cannot pipe objects to this script.

OUTPUTS

No objects are output from this script.
This script creates a Word, PDF, plain text, or HTML document.

NOTES

NAME: CC_Inventory_V1.ps1
VERSION: 1.30
AUTHOR: Carl Webster
LASTEDIT: October 8, 2026

----- EXAMPLE 1 -----

PS C:\PSScript >.\CC_Inventory_V1.ps1

Creates an HTML report by default.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 2 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -ProfileName "My CC Profile"
```

Creates an HTML report by default.

Uses the stored profile named "My CC Profile".

----- EXAMPLE 3 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MSWord
```

Uses all default values.

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"

\$env:username = Administrator

Carl Webster for the Company Name.

Sideline for the Cover Page format.

Administrator for the Username.

Creates a Microsoft Word report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 4 -----

```
PS C:\>
```

```
*****  
* Example for using the script as a scheduled task *  
*****
```

First, from an elevated PowerShell session, create a profile named Default.

```
C:\PSScript >.\Set-XDCredentials -CustomerID "CustomerID" -ProfileType CloudAPI  
-StoreAs "Default" -APIKey "ID" -SecretKey "Secret"
```

Note: Review the instructions in the Authentication section of the ReadMe file for the details on creating a profile named Default.

ReadMe file:

https://github.com/CarlWebster/Citrix-Cloud-DaaS-/blob/main/CC_Inventory_V1_ReadMe.pdf

```
PowerShell.exe -NoLogo -File "C:\PSScript\CC_Inventory_V1.ps1 -MaxDetails  
-SiteName MyCCSite' -AddDateTime"
```

Set the following parameter values:

Administrators	= True
Applications	= True
DeliveryGroups	= True
Hosting	= True
Logging	= True
MachineCatalogs	= True
Policies	= True
StoreFront	= True
VDARegistryKeys	= True
NoPolicies	= False
Section	= "All"

Creates an HTML report named MyCCSite_YYYY-MM-DD_HHMM.html.

Uses the profile named Default, which prevents any extraneous Citrix Cloud (now DaaS) authentication prompts.

For more information on running a PowerShell script as a scheduled task, see:
<https://carlwebster.com/running-powershell-scripts-scheduled-task/>
<https://carlwebster.com/running-powershell-scheduled-tasks-third-opinion/>

----- EXAMPLE 5 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -PDF
```

Uses all default values and saves the document as a PDF file.

```
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl  
Webster" or  
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"  
$env:username = Administrator
```

Carl Webster for the Company Name.
Sideline for the Cover Page format.
Administrator for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 6 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Text
```

Saves the document as a formatted text file.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 7 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -HTML
```

Saves the document as an HTML file.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 8 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MachineCatalogs
```

Creates an HTML report with full details for all machines in all Machine Catalogs.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 9 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -DeliveryGroups
```

Creates an HTML report with full details for all desktops in all Desktop (Delivery) Groups.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 10 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -DeliveryGroupsUtilization -MSWord
```

Note: Using DeliveryGroupsUtilization requires the use of MSWord or PDF. Microsoft Excel is also required.

Creates a Microsoft Word report with utilization details for all Desktop (Delivery) Groups.

Uses all Default values.

```
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or  
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"  
$env:username = Administrator
```

Carl Webster for the Company Name.
Sideline for the Cover Page format.
Administrator for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 11 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -DeliveryGroupsUtilization -PDF
```

Note: Using DeliveryGroupsUtilization requires the use of MSWord or PDF. Microsoft Excel is also required.

Creates a PDF report with utilization details for all Desktop (Delivery) Groups.

Uses all Default values.

```
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or  
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"  
$env:username = Administrator
```

Carl Webster for the Company Name.
Sideline for the Cover Page format.
Administrator for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 12 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -DeliveryGroups -MachineCatalogs
```

Creates an HTML report with full details for all machines in all Machine Catalogs and all desktops in all Delivery Groups.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 13 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Applications
```

Creates an HTML report with full details for all applications.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 14 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Policies
```

Creates an HTML report with full details for Policies.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 15 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -NoPolicies
```

Creates an HTML report with no Policy information.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 16 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -NoADPolicies
```

Creates an HTML report with no Citrix AD-based Policy information.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 17 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Policies -NoADPolicies
```

Creates an HTML report with full details on Site policies created in Studio but no Citrix AD-based Policy information.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 18 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Logging -StartDate 09/01/2027 -EndDate 09/30/2027
```

Creates an HTML report with Configuration Logging details for the dates 09/01/2027 through 09/30/2027.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 19 -----

```
PS C:\PSScript >.\CVAD_Inventory_V3.ps1 -Logging -StartDate "09/01/2027 10:00:00" -EndDate "09/01/2027 14:00:00" -MSWord
```

Creates a Microsoft Word report with Configuration Logging details for the time range 09/01/2027 10:00:00AM through 09/01/2027 02:00:00PM.

Narrowing the report down to seconds does not work. Seconds must be either 00 or 59.

Uses all Default values.

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"
\$env:username = Administrator

Carl Webster for the Company Name.

Sideline for the Cover Page format.

Administrator for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 20 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Administrators
```

Creates an HTML report with full details on Administrator Scopes and Roles.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 21 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Hosting
```

Creates an HTML report with full details for Hosts, Host Connections, and Resources.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 22 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -StoreFront
```

Creates an HTML report with full details for StoreFront.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 23 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MachineCatalogs -DeliveryGroups  
-Applications -Policies -Hosting -StoreFront
```

Creates an HTML report with full details for all:

- Machines in all Machine Catalogs
- Desktops in all Delivery Groups
- Applications
- Policies
- Hosts, Host Connections, and Resources
- StoreFront

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS)

credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 24 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MC -DG -Apps -Policies -Hosting -PDF
```

Creates a PDF report with full details for all:

- Machines in all Machine Catalogs
- Desktops in all Delivery Groups
- Applications
- Policies
- Hosts, Host Connections, and Resources

Uses all Default values.

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"
\$env:username = Administrator

Carl Webster for the Company Name.

Sideline for the Cover Page format.

Administrator for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 25 -----

```
PS C:\>PS C:\PSScript.\CC_Inventory_V1.ps1 -MSWord -CompanyName "Carl Webster Consulting" -CoverPage "Mod" -UserName "Carl Webster"
```

Creates a Microsoft Word report.

Uses:

- Carl Webster Consulting for the Company Name.
- Mod for the Cover Page format.
- Carl Webster for the Username.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 26 -----

```
PS C:\>PS C:\PSScript.\CC_Inventory_V1.ps1 -CN "Carl Webster Consulting" -CP "Mod"
-UN "Carl Webster" -MSWord
```

Creates a Microsoft Word report.

Uses:

- Carl Webster Consulting for the Company Name (alias CN).
- Mod for the Cover Page format (alias CP).
- Carl Webster for the Username (alias UN).

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 27 -----

```
PS C:\>PS C:\PSScript.\CC_Inventory_V1.ps1 -MSWord -CompanyName "Sherlock Holmes
Consulting" -CoverPage Exposure -UserName "Dr. Watson" -CompanyAddress "221B Baker
Street, London, England" -CompanyFax "+44 1753 276600" -CompanyPhone "+44 1753 276200"
```

Creates a Microsoft Word report.

Uses:

- Sherlock Holmes Consulting for the Company Name.
- Exposure for the Cover Page format.
- Dr. Watson for the Username.
- 221B Baker Street, London, England for the Company Address.
- +44 1753 276600 for the Company Fax.
- +44 1753 276200 for the Company Phone.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 28 -----

```
PS C:\>PS C:\PSScript.\CC_Inventory_V1.ps1 -MSWord -CompanyName "Sherlock Holmes
Consulting" -CoverPage Facet -UserName "Dr. Watson" -CompanyEmail
SuperSleuth@SherlockHolmes.com
```

Creates a Microsoft Word report.

Uses:

- Sherlock Holmes Consulting for the Company Name.
- Facet for the Cover Page format.
- Dr. Watson for the Username.
- SuperSleuth@SherlockHolmes.com for the Company Email.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 29 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -AddDateTime
```

Creates an HTML report.

Adds a date time stamp to the end of the file name.

The timestamp is in the format of yyyy-MM-dd_HH:mm.

June 1, 2027, at 6 PM is 2027-06-01_1800.

The output filename will be CCSiteName_2027-06-01_1800.docx

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 30 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -PDF -AddDateTime
```

Creates a PDF report.

Uses all Default values and saves the document as a PDF file.

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"
\$env:username = Administrator

Carl Webster for the Company Name.

Sideline for the Cover Page format.

Administrator for the Username.

Adds a date time stamp to the end of the file name.

The timestamp is in the format of yyyy-MM-dd_HH:mm.

June 1, 2027, at 6 PM is 2027-06-01_1800.

The output filename will be CCSiteName_2027-06-01_1800.pdf

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 31 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Folder \\FileServer\ShareName
```

Creates an HTML report.

Output file is saved in the path \\FileServer\ShareName

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the

Default profile.

----- EXAMPLE 32 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Policies
```

Creates an HTML report that contains only policy information.
Processes only the Policies section of the report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 33 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Groups -DG
```

Creates an HTML report.
Processes only the Delivery Groups section of the report with Delivery Group details.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 34 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Groups
```

Creates an HTML report.
Processes only the Delivery Groups section of the report with no Delivery Group details.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 35 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Config, Licensing -HTML
```

Creates an HTML report.

The report includes only the Configuration and Licensing sections.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 36 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -VDARegistryKeys
```

Creates an HTML report.

Adds the information on VDA registry keys to Appendix A.

Forces the MachineCatalogs parameter to \$True if DeliveryGroups is not selected.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 37 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -VDARegistryKeys -MachineCatalogs
```

Creates an HTML report.

Adds the information on VDA registry keys to Appendix A.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 38 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -VDARegistryKeys -DeliveryGroups
```

Creates an HTML report.

Adds the information on VDA registry keys to Appendix A.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 39 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -VDARegistryKeys -MachineCatalogs  
-DeliveryGroups
```

Creates an HTML report.
Adds the information on VDA registry keys to Appendix A.
Only processes machine details for the machine catalogs.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 40 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Catalogs -VDARegistryKeys  
-MachineCatalogs
```

Creates an HTML report with only machine catalog data.
Adds the information on VDA registry keys to Appendix A.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 41 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Section Groups -VDARegistryKeys  
-DeliveryGroups
```

Creates an HTML report with only delivery group data.
Adds the information on VDA registry keys to Appendix A.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 42 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MaxDetails
```

Set the following parameter values:

Administrators	= True
Applications	= True
DeliveryGroups	= True
Hosting	= True
Logging	= True
MachineCatalogs	= True
Policies	= True
StoreFront	= True
VDARegistryKeys	= True

```
NoPolicies      = False
Section         = "All"
```

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 43 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MaxDetails -HTML -MSWord -PDF -Text
```

Creates four reports: HTML, Microsoft Word, PDF, and plain text.

For Microsoft Word and PDF, Uses all Default values.

```
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl
Webster" or
```

```
HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"
$env:username = Administrator
```

Carl Webster for the Company Name.

Sideline for the Cover Page format.

Administrator for the Username.

Set the following parameter values:

```
Administrators  = True
Applications    = True
DeliveryGroups = True
Hosting         = True
Logging         = True
MachineCatalogs = True
Policies        = True
StoreFront      = True
VDARegistryKeys = True

NoPolicies      = False
Section         = "All"
```

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 44 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -Dev -ScriptInfo -Log
```

Creates an HTML report.

Creates a text file named CCInventoryScriptErrors_yyyyMMddTHHmssffff.txt that contains up to the last 250 errors reported by the script.

Creates a text file named CCInventoryScriptInfo_yyyy-MM-dd_HHm.txt that contains all the script parameters and other basic information.

Creates a text file for transcript logging named
CCDocScriptTranscript_yyyyMMddTHHmssffff.txt.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 45 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -CSV
```

Uses all Default values.

Creates a CSV file for each Appendix.

For example:

CCSiteName_Documentation_AppendixA_VDARegistryItems.csv

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 46 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -MaxDetails -HTML -MSWord -PDF -Text -Dev  
-ScriptInfo -Log -CSV
```

Creates four reports: HTML, Microsoft Word, PDF, and plain text.

Creates a text file named CCInventoryScriptErrors_yyyyMMddTHHmssffff.txt that contains up to the last 250 errors reported by the script.

Creates a text file named CCInventoryScriptInfo_yyyy-MM-dd_HHm.txt that contains all the script parameters and other basic information.

Creates a text file for transcript logging named
CCDocScriptTranscript_yyyyMMddTHHmssffff.txt.

Creates a CSV file for each Appendix.

For example:

CCSiteName_Documentation_AppendixA_VDARegistryItems.csv

For Microsoft Word and PDF, uses all Default values.

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\CompanyName="Carl Webster" or

HKEY_CURRENT_USER\Software\Microsoft\Office\Common\UserInfo\Company="Carl Webster"

```
$env:username = Administrator
```

Carl Webster for the Company Name.
Sideline for the Cover Page format.
Administrator for the Username.

Set the following parameter values:

```
Administrators      = True
Applications        = True
DeliveryGroups      = True
Hosting             = True
Logging             = True
MachineCatalogs     = True
Policies            = True
StoreFront          = True
VDARegistryKeys     = True

NoPolicies          = False
Section             = "All"
```

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

Note: If a profile named Default does not exist, you may be prompted multiple times for Citrix Cloud (now DaaS) credentials.

----- EXAMPLE 47 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -SmtpServer mail.domain.tld -From
CCAdmin@domain.tld -To ITGroup@domain.tld
```

The script uses the email server mail.domain.tld, sending from CCAdmin@domain.tld and sending to ITGroup@domain.tld.

The script uses the default SMTP port 25 and does not use SSL.

If the current user's credentials are not valid to send an email, the script prompts the user to enter valid credentials.

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 48 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -SmtpServer mailrelay.domain.tld -From
Anonymous@domain.tld -To ITGroup@domain.tld
```

SENDING UNAUTHENTICATED EMAIL

The script uses the email server mailrelay.domain.tld, sending from anonymous@domain.tld, sending to ITGroup@domain.tld.

To send an unauthenticated email using an email relay server requires the From email account to use the name Anonymous.

The script uses the default SMTP port 25 and does not use SSL.

GMAIL/GOOGLE WORKSPACE SMTP RELAY
<https://support.google.com/a/answer/2956491?hl=en>
<https://support.google.com/a/answer/176600?hl=en>

To send an email using a Gmail or g-suite account, you may have to turn ON the "Less secure app access" option on your account.

GMAIL/GOOGLE WORKSPACE SMTP RELAY

The script will generate an anonymous, secure password for the anonymous@domain.tld account.

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 49 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -SmtpServer
labaddomain-com.mail.protection.outlook.com -UseSSL -From
SomeEmailAddress@labaddomain.com -To ITGroupDL@labaddomain.com
```

OFFICE 365 Example

<https://docs.microsoft.com/en-us/exchange/mail-flow-best-practices/how-to-set-up-a-multifunction-device-or-application-to-send-email-using-office-3>

This uses Option 2 from the above link.

OFFICE 365 Example

The script uses the email server labaddomain-com.mail.protection.outlook.com, sending from SomeEmailAddress@labaddomain.com and sending to ITGroupDL@labaddomain.com.

The script uses the default SMTP port 25 and SSL.

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 50 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -SmtpServer smtp.office365.com -SmtpPort 587
-UseSSL -From Webster@CarlWebster.com -To ITGroup@CarlWebster.com
```

The script uses the email server smtp.office365.com on port 587 using SSL, sending from webster@carlwebster.com and sending to ITGroup@carlwebster.com.

If the current user's credentials are not valid to send an email, the script prompts the user to enter valid credentials.

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

----- EXAMPLE 51 -----

```
PS C:\PSScript >.\CC_Inventory_V1.ps1 -SmtpServer smtp.gmail.com -SmtpPort 587
-UseSSL -From Webster@CarlWebster.com -To ITGroup@CarlWebster.com
```

*** NOTE ***

To send an email using a Gmail or g-suite account, you may have to turn ON the "Less secure app access" option on your account.

*** NOTE ***

The script uses the email server smtp.gmail.com on port 587 using SSL, sending from webster@gmail.com and sending to ITGroup@carlwebster.com.

If the current user's credentials are not valid to send an email, the script prompts the user to enter valid credentials.

Creates an HTML report.

If no authentication profile exists, the script prompts for Citrix Cloud (now DaaS) credentials.

If a profile named Default exists, the script uses the credentials stored in the Default profile.

RELATED LINKS