

## Documentación Codelab 3

### S3AllowIAMUser Información

política para S3 buckets

[Editar](#) [Eliminar](#)

#### Detalles de la política

Tipo	Hora de creación	Hora de modificación	ARN
Administrada por el cliente	December 04, 2025, 00:38 (UTC-05:00)	December 04, 2025, 00:38 (UTC-05:00)	arn:aws:iam::443686177311:policy/S3AllowIAMUser

### harrison-angular Información

[Eliminar](#)

#### Resumen

ARN arn:aws:iam::443686177311:user/harrison-angular	Acceso a la consola <a href="#">Habilitado sin MFA</a>	Clave de acceso 1 AKIAWOTOBZIPZ6HK3SYZ - Active <a href="#">Nunca usado. Creado hoy.</a>
Creado December 04, 2025, 01:07 (UTC-05:00)	Último inicio de sesión en la consola <a href="#">Nunca</a>	Clave de acceso 2 <a href="#">Crear clave de acceso</a>

[Permisos](#) | [Grupos](#) | [Etiquetas \(1\)](#) | [Credenciales de seguridad](#) | [Último acceso](#)

EXPLORER

OPEN EDITORS

index.html app-s3\src

ANGULARDEPLEGADOAWS3

app-s3

.angular\cache\21.0.2\app-s3

.vscode

node\_modules

public

src

app

index.html

main.server.ts

main.ts

server.ts

styles.css

.editorconfig

.gitignore

angular.json

package-lock.json

package.json

README.md

tsconfig.app.json

tsconfig.json

tsconfig.spec.json

index.html

1 <!doctype html>

2 <html lang="en">

3 <head>

4 <meta charset="utf-8">

5 <title>AppS3</title>

6 <base href="/">

7 <meta name="viewport" content="width=device-width, initial-scale=1">

8 <link rel="icon" type="image/x-icon" href="favicon.ico">

9 </head>

10 <body>

11 <app-root></app-root>

12 </body>

13 </html>

14

PROBLEMS

OUTPUT

DEBUG CONSOLE

TERMINAL

PORTS

powershell

PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3> aws --version

aws-cli/2.32.9 Python/3.13.9 Windows/10 exe/AMD64

PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3> aws s3api create-bucket --bucket harrison-a

ngular-app --region us-east-1

>>

Unable to locate credentials. You can configure credentials by running "aws login".

PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3>

```
NOTE: Raw file sizes do not reflect development server per-request transformations.
→ Local: http://localhost:4200/
→ press h + enter to show help
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
* History restored

• aws-cli/2.32.9 Python/3.13.9 Windows/10 exe/AMD64
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3> aws s3api create-bucket --bucket harrison-a
ngular-app --region us-east-1
>>
Unable to locate credentials. You can configure credentials by running "aws login".
>>
AWS Access Key ID [None]: AKIAWOT0BZIPZ6HK3SYZ
• AWS Secret Access Key [None]: ZyD071Eu6LBEhx11Q9AZdvVrb5mIs8X3n8BDWeIH
Default region name [None]: us-east-1
Default output format [None]: json
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3> aws configure list
>>
NAME      : VALUE                                : TYPE      : LOCATION
• profile  : <not set>                               : None      : None
access_key : *****3SYZ                             : shared-credentials-file :
secret_key : *****WeIH                             : shared-credentials-file :
region    : us-east-1                               : config-file : ~/.aws/config
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3> aws s3api create-bucket --bucket harrison-a
ngular-app --region us-east-1
>>
{
  "Location": "/harrison-angular-app"
}

○ PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3>
```

```
{ } public-access.json U × { } bucket-policy.json U
app-s3 > { } public-access.json > ...
1 {
2   "BlockPublicAcls": false,
3   "IgnorePublicAcls": false,
4   "BlockPublicPolicy": false,
5   "RestrictPublicBuckets": false
6 }
7

"IgnorePublicAcls": false,
"BlockPublicPolicy": false,
"RestrictPublicBuckets": false
}

aws s3api put-public-access-block --
bucket harrison-angular-app --public-access-block-configuration file://public-access.json
>> C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
• PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
```

```
public-access.json U bucket-policy.json U X
app-s3 > {} bucket-policy.json > ...
1  {
2    "Version": "2012-10-17",
3    "Statement": [
4      {
5        "Sid": "PublicRead",
6        "Effect": "Allow",
7        "Principal": "*",
8        "Action": "s3:GetObject",
9        "Resource": "arn:aws:s3:::harrison-angular-app/*"
10     }
11   ]
12 }
13

"IgnorePublicAcls": false,

"RestrictPublicBuckets": false
...
bucket harrison-angular-app --public-access-block-configuration file://public-access.json
>> C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3> aws s3api put-bucket-policy --bucket
harrison-angular-app --policy file://bucket-policy.json
>>
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
```

```

harrison-angular-app --policy file://bucket-policy.json
>> ng build --configuration production

Browser bundles
Initial chunk files | Names | Raw size | Estimated transfer size
main-UKKID60C.js | main | 247.31 kB | 68.39 kB
styles-5INURTS0.css | styles | 0 bytes | 0 bytes

Initial total | 247.31 kB | 68.39 kB

Server bundles
Initial chunk files | Names | Raw size
server.mjs | server | 805.33 kB
main.server.mjs | main.server | 693.15 kB
polyfills.server.mjs | polyfills.server | 233.48 kB
chunk-L2MVFKD.mjs | - | 1.32 kB
chunk-T55IDOPT.mjs | - | 976 bytes

Lazy chunk files | Names | Raw size
chunk-RHDGF2TI.mjs | xhr2 | 12.14 kB
chunk-N3SI5I4Q.mjs | xhr2 | 12.07 kB

Prerendered 1 static route.
Application bundle generation complete. [13.172 seconds] - 2025-12-04T14:13:49.175Z

Output location: C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3\dist\app-s3


PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3> aws s3 sync dist/app-s3/browser s3://harrison-angular-app --delete
>>
upload: dist\app-s3\browser\favicon.ico to s3://harrison-angular-app/favicon.ico
upload: dist\app-s3\browser\styles-5INURTS0.css to s3://harrison-angular-app/styles-5INURTS0.css
upload: dist\app-s3\browser\index.csr.html to s3://harrison-angular-app/index.csr.html
upload: dist\app-s3\browser\index.html to s3://harrison-angular-app/index.html
upload: dist\app-s3\browser\main-UKKID60C.js to s3://harrison-angular-app/main-UKKID60C.js

```

```

PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3> aws s3 sync dist/app-s3/browser s3://harrison-angular-app --delete
>>
upload: dist\app-s3\browser\favicon.ico to s3://harrison-angular-app/favicon.ico
upload: dist\app-s3\browser\styles-5INURTS0.css to s3://harrison-angular-app/styles-5INURTS0.css
upload: dist\app-s3\browser\index.csr.html to s3://harrison-angular-app/index.csr.html
upload: dist\app-s3\browser\index.html to s3://harrison-angular-app/index.html
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3> -angular-app/main-UKKID60C.js
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3> aws s3 website s3://harrison-angular-app --index-document index.html --error-document index.html
>>
PS C:\Users\HARRISON\Documents\angularDelegadoAwsS3\app-s3>

```

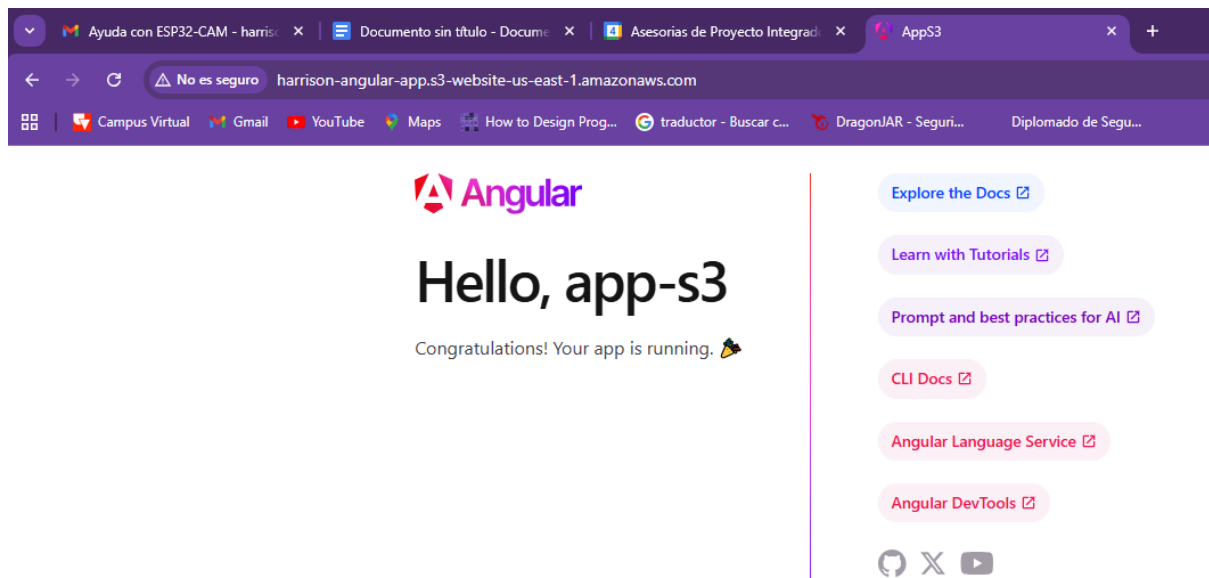

**http://harrison-angular-app.s3-website-us-east-1.amazonaws.com**