




EXERCICIO 1

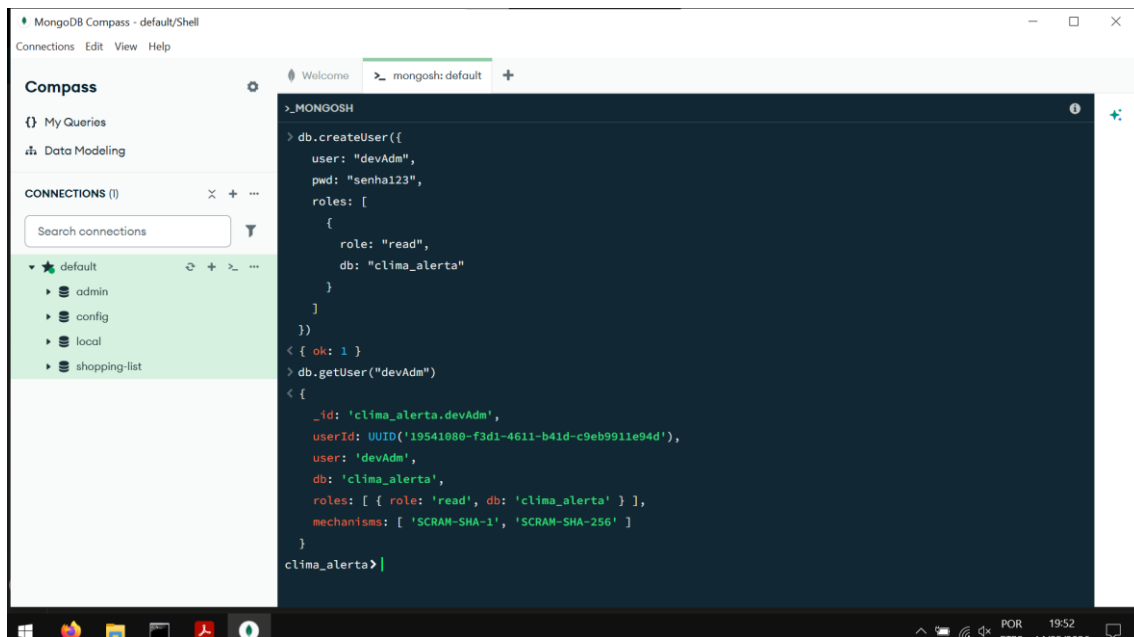


EXERCICIO 2

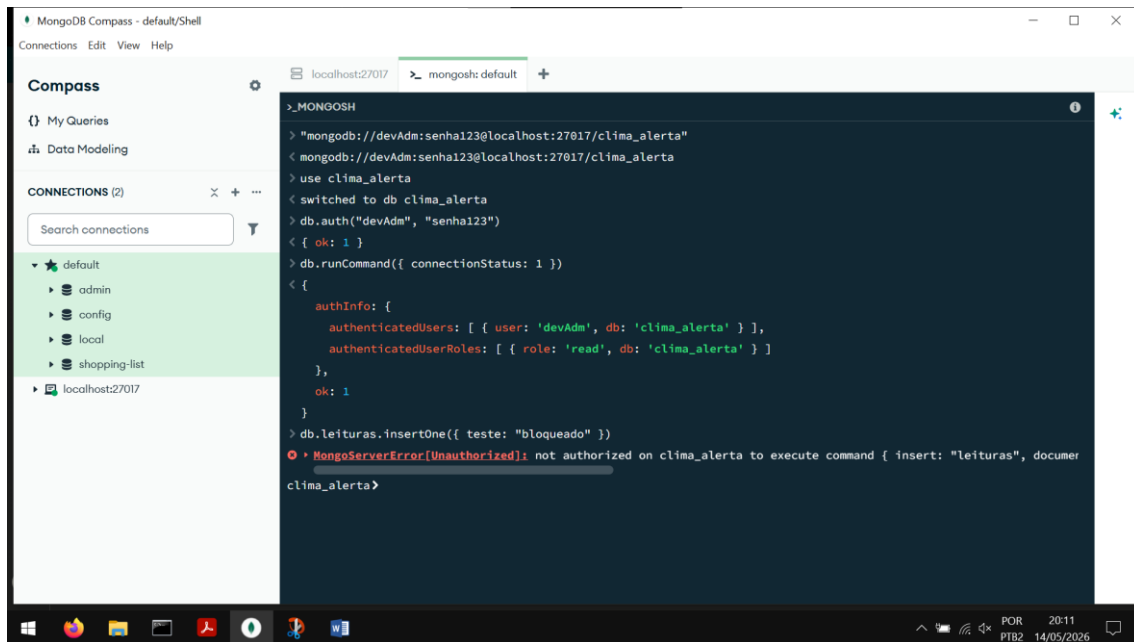


EXERCICIO 3

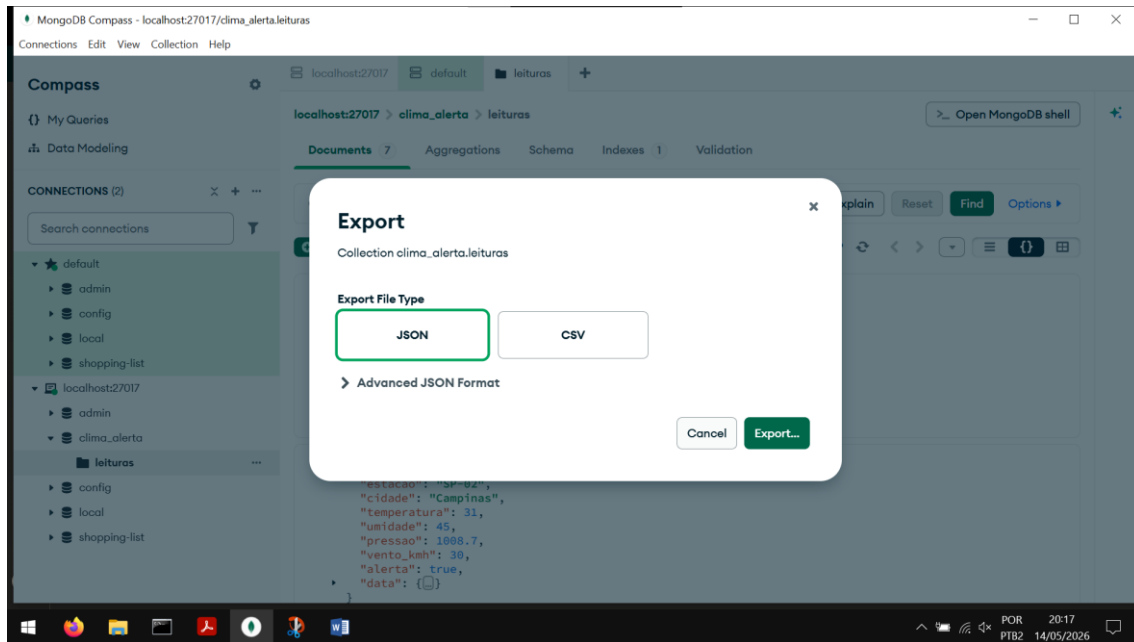

EXERCICIO 4

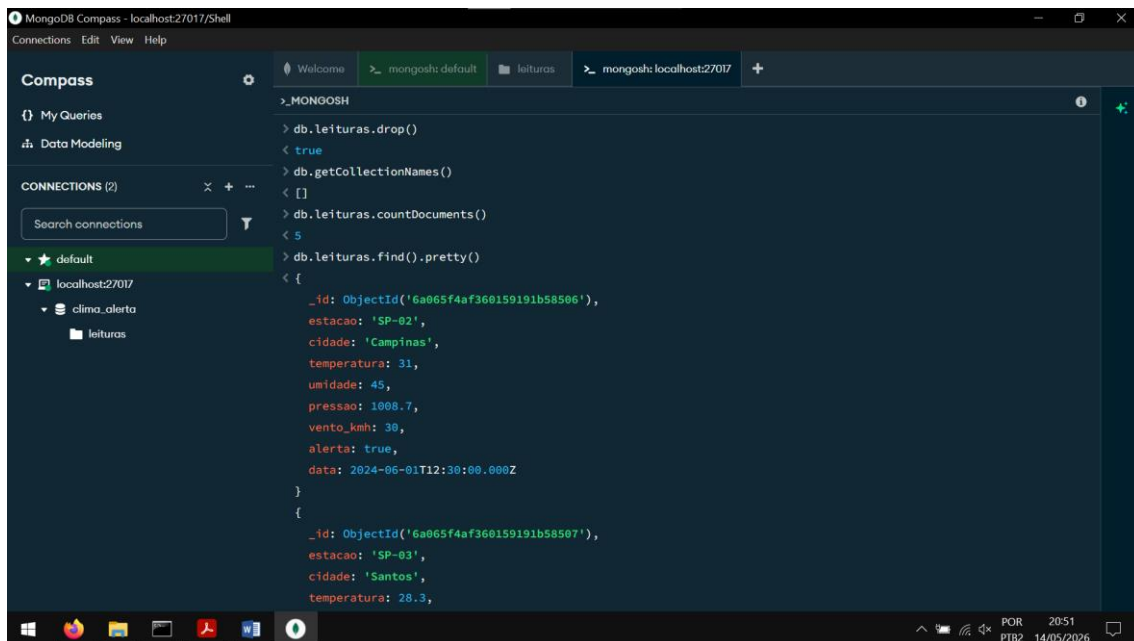

EXERCICIO 5

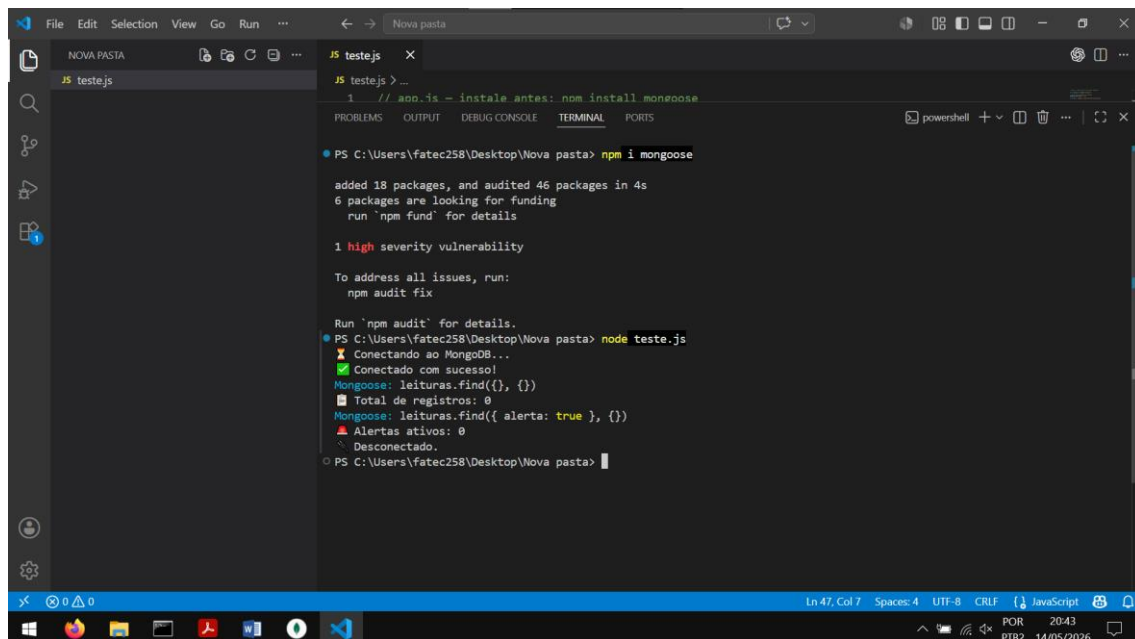

The image shows a Visual Studio Code editor window with a terminal open. The terminal is running a PowerShell session. The user has installed the mongoose package using npm and then executed a test script named teste.js. The script connects to a MongoDB database, finds all records, and then finds records where the 'alerta' field is true. The output shows that there are 0 records in total and 0 active alerts.

```
1 // aop.js - instale antes: npm install mongoose
PS C:\Users\fatcc258\Desktop\Nova pasta> npm i mongoose
added 18 packages, and audited 46 packages in 4s
6 packages are looking for funding
run 'npm fund' for details

1 high severity vulnerability

To address all issues, run:
npm audit fix

Run 'npm audit' for details.
PS C:\Users\fatcc258\Desktop\Nova pasta> node teste.js
Conectando ao MongoDB...
Conectado com sucesso!
Mongoose: leituras.find({}, {})
Total de registros: 0
Mongoose: leituras.find({ alerta: true }, {})
Alertas ativos: 0
Desconectado.
PS C:\Users\fatcc258\Desktop\Nova pasta>
```