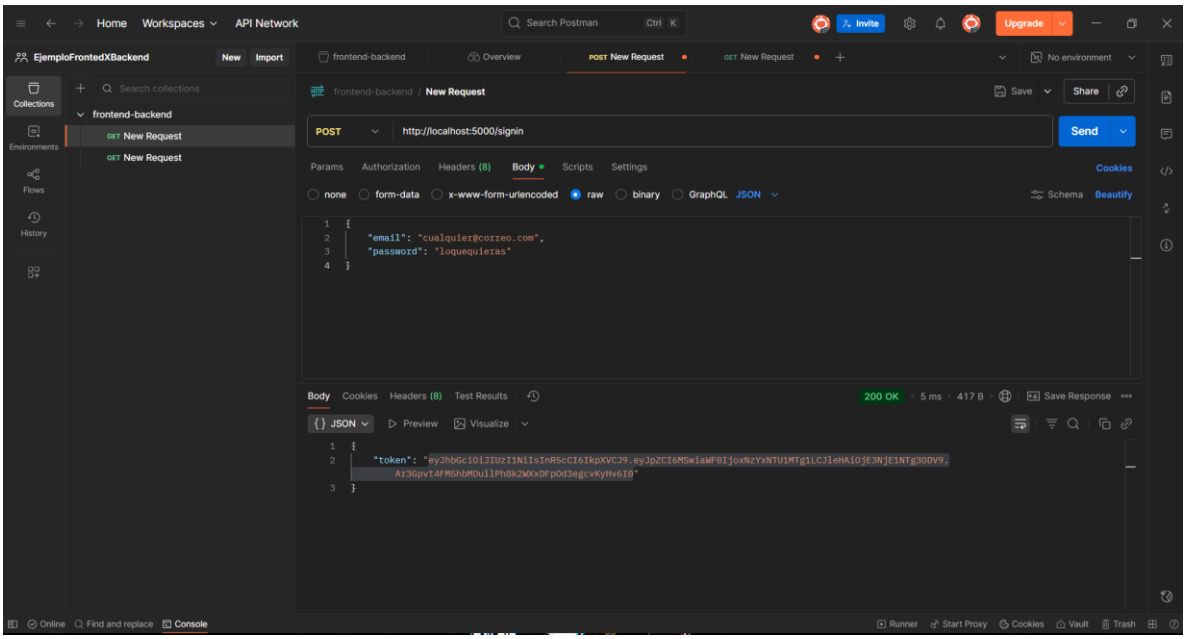
Home
Workspaces
API Network
Search Postman
Invite
Upgrade
EjemploFrontedXBackend
New
Import
frontend-backend
Overview
POST New Request
GET New Request
No environment
Collections
Environments
Flows
History
Search collections
frontend-backend
GET New Request
GET New Request
frontend-backend / New Request
Save
Share
POST
http://localhost:5000/signin
Send
Params
Authorization
Headers (8)
Body
Scripts
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
JSON
Schema
Beautify
{
"email": "cualquier@correo.com",
"password": "loquequieras"
}
Body
Cookies
Headers (8)
Test Results
200 OK
5 ms
417 B
Save Response
JSON
Preview
Visualize
{
"token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJpZCI6MSwiaWF0IjoxNzYxNTU1MTg1LCJleHAiOjE3NjE1NTg30DV9.
Ar3Gpvt4FM5hbMDu1lPhBk2WXxDFpOd3egcvKyHv6I0"
}
Online
Find and replace
Console
Runner
Start Proxy
Cookies
Vault
Trash

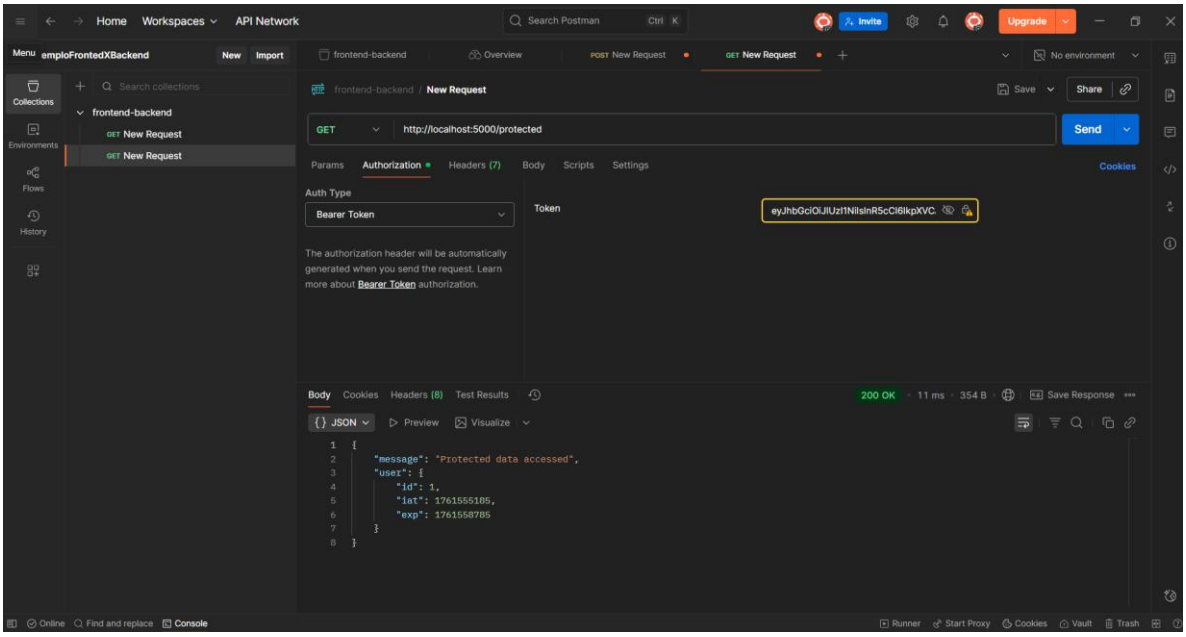
Home
Workspaces
API Network
Search Postman
Invite
Upgrade
Menu
emploFrontedXBackend
New
Import
frontend-backend
Overview
POST New Request
GET New Request
No environment
Collections
Environments
Flows
History
Search collections
frontend-backend
GET New Request
GET New Request
frontend-backend / New Request
Save
Share
GET
http://localhost:5000/protected
Send
Params
Authorization
Headers (7)
Body
Scripts
Settings
Cookies
Auth Type
Bearer Token
Token
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVC
The authorization header will be automatically generated when you send the request. Learn more about Bearer Token authorization.
Body
Cookies
Headers (8)
Test Results
200 OK
11 ms
354 B
Save Response
JSON
Preview
Visualize
{
"message": "Protected data accessed",
"user": {
"id": 1,
"iat": 1761555185,
"exp": 1761558785
}
}
Online
Find and replace
Console
Runner
Start Proxy
Cookies
Vault
Trash