

1

The screenshot shows the MySQL Workbench interface with the 'ajedrez' database selected. The SQL editor contains the following queries:

```
1 ALTER TABLE hotel_participante
2 ADD CONSTRAINT chk_datainicio CHECK (f_salida > f_entrada);
3
4 ALTER TABLE hotel
5 ADD CONSTRAINT chk_hotel_telefono CHECK (telefono BETWEEN 100000000 AND 999999999);
6 ALTER TABLE hotel
7 ADD CONSTRAINT chk_hotel_nombre CHECK (CHAR_LENGTH(nombre) >= 3);
8
9 ALTER TABLE participante
10 ADD CONSTRAINT chk_participante_tipo CHECK ((tipo='jugador' AND nivel IS NOT NULL) OR (tipo='arbitro' AND nivel IS NULL)),
11 ADD CONSTRAINT chk_participante_nivel CHECK (nivel >= 1 AND nivel <= 10);
12
13 ALTER TABLE pais
14 ADD CONSTRAINT chk_pais_nclubes CHECK (n_clubes BETWEEN 1 AND 999);
```

The Action Output window shows the results of the queries:

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

2

The screenshot shows the MySQL Workbench interface with the 'ajedrez' database selected. The SQL editor contains the following query:

```
1 CREATE DATABASE 'ajedrez' /*!40100 DEFAULT CHARACTER SET utf8mb4 COLLATE utf8mb4_spanish_ci */ /*!80016 DEFAULT ENCRYPTION='N' */;
```

The Action Output window shows the results of the query:

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

3

ajedrez_con_model.mwb - MySQL Workbench

Local Instance 3306 | MySQL Model | Diagrama ajedrez

File Edit View Query Database Server Tools Scripting Help

Schemas | check_ajedrez* | SQL File 4* | ajedrez.hotel | ajedrez.hotel_participante | ajedrez.jugador_partida | ajedrez.movimiento | ajedrez.pais | Context Help | Snippets

Filter objects

ajedrez

- Tables
 - hotel
 - hotel_participante
 - jugador_partida
 - movimiento
 - pais
 - participante_camp
 - participantes
 - partida
 - sala
- sala_medios
- Views
- Stored Procedures
- Functions
- sys
 - Tables

Object Info Session

Table: sala_medios

Columns:
id_sala int PK
medio varchar(100) PK

DDL for ajedrez.hotel

```
1 CREATE TABLE `hotel` (  
2   `id` int NOT NULL AUTO_INCREMENT,  
3   `nombre` varchar(50) COLLATE utf8mb4_spanish_ci DEFAULT NULL,  
4   `direccion` varchar(100) COLLATE utf8mb4_spanish_ci NOT NULL,  
5   `telefono` int DEFAULT NULL,  
6   PRIMARY KEY (`id`),  
7   UNIQUE KEY `nombre_UNIQUE` (`nombre`)  
8 ) ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

Automatic context help is disabled. Use the toolbar to manually get help for the current object or to toggle automatic context help.

4

ajedrez_con_model.mwb - MySQL Workbench

Local Instance 3306 | MySQL Model | Diagrama ajedrez

File Edit View Query Database Server Tools Scripting Help

Schemas | check_ajedrez* | SQL File 4* | ajedrez.hotel | ajedrez.hotel_participante | ajedrez.jugador_partida | ajedrez.movimiento | ajedrez.pais | Context Help | Snippets

Filter objects

ajedrez

- Tables
 - hotel
 - hotel_participante
 - jugador_partida
 - movimiento
 - pais
 - participante_camp
 - participantes
 - partida
 - sala
- sala_medios
- Views
- Stored Procedures
- Functions
- sys
 - Tables

Object Info Session

Table: sala_medios

Columns:
id_sala int PK
medio varchar(100) PK

DDL for ajedrez.hotel_participante

```
1 CREATE TABLE `hotel_participante` (  
2   `id_hotel` int NOT NULL,  
3   `id_participante` int NOT NULL,  
4   `f_entrada` date NOT NULL,  
5   `f_salida` date DEFAULT NULL,  
6   PRIMARY KEY (`id_hotel`, `id_participante`, `f_entrada`),  
7   KEY `fk_hotelparticip_participante_idx` (`id_participante`),  
8   CONSTRAINT `fk_hotelparticip_hotel` FOREIGN KEY (`id_hotel`) REFERENCES `hotel` (`id`) ON UPDATE CASCADE,  
9   CONSTRAINT `fk_hotelparticip_participante` FOREIGN KEY (`id_participante`) REFERENCES `participantes` (`id`) ON UPDATE CASCADE  
10 ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

Automatic context help is disabled. Use the toolbar to manually get help for the current object or to toggle automatic context help.

5

ajedrez_con_model.mwb - MySQL Workbench

Schemas: Local Instance 3306, MySQL Model, Diagrama_ajedrez

ajedrez

- hotel
- hotel_participante
- jugador_partida
- movimiento
- pais
- participante_camp
- participantes
- partida
- sala
- sala_medios

DDL for ajedrez.jugador_partida

```
1 CREATE TABLE `jugador_partida` (  
2   `id_partida` int NOT NULL,  
3   `id_participantes` int NOT NULL,  
4   `color` enum('blanca','negra') COLLATE utf8mb4_spanish_ci NOT NULL DEFAULT 'blanca',  
5   PRIMARY KEY (`id_partida`,`id_participantes`),  
6   KEY `fk_partida_has_participantes_participantes1_idx` (`id_participantes`),  
7   KEY `fk_partida_has_participantes_participantes1_idx` (`id_participantes`),  
8   CONSTRAINT `fk_partida_has_participantes_participantes1` FOREIGN KEY (`id_participantes`) REFERENCES `participantes` (`id`) ON UPDATE CASCADE,  
9   CONSTRAINT `fk_partida_has_participantes_participantes1` FOREIGN KEY (`id_participantes`) REFERENCES `participantes` (`id`) ON UPDATE CASCADE,  
10  ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

6

ajedrez_con_model.mwb - MySQL Workbench

Schemas: Local Instance 3306, MySQL Model, Diagrama_ajedrez

ajedrez

- hotel
- hotel_participante
- jugador_partida
- movimiento
- pais
- participante_camp
- participantes
- partida
- sala
- sala_medios

DDL for ajedrez.movimiento

```
1 CREATE TABLE `movimiento` (  
2   `id_partida` int NOT NULL,  
3   `id_movimiento` tinyint NOT NULL,  
4   `movimiento` tinyint NOT NULL,  
5   `comentario` varchar(100) COLLATE utf8mb4_spanish_ci NOT NULL,  
6   `jugada` char(10) COLLATE utf8mb4_spanish_ci NOT NULL,  
7   PRIMARY KEY (`id_partida`,`id_movimiento`),  
8   KEY `fk_movimiento_partida_idx` (`id_partida`),  
9   CONSTRAINT `fk_movimiento_partida` FOREIGN KEY (`id_partida`) REFERENCES `partida` (`id`) ON DELETE CASCADE ON UPDATE CASCADE,  
10  ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

7

ajedrez_con_model.mwb - MySQL Workbench

Local Instance 3306 MySQL Model Diagrama_ajedrez

File Edit View Query Database Server Tools Scripting Help

Schemas

ajedrez

Tables

hotel

hotel_participante

jugador_partida

movimiento

pais

participante_camp

participantes

partida

sala

sala_medios

Views

Stored Procedures

Functions

sys

Tables

Object Info Session

Table: sala_medios

Columns:

id_sala int PK

medio varchar(100)

PK

DDL for ajedrez.pais

```
1 CREATE TABLE `pais` (  
2   `id` int NOT NULL AUTO_INCREMENT,  
3   `nombre` varchar(100) COLLATE utf8mb4_spanish_ci NOT NULL,  
4   `n_clubes` smallint NOT NULL,  
5   `id_pais_representado` int DEFAULT NULL,  
6   PRIMARY KEY (`id`),  
7   UNIQUE KEY `nombre` (`nombre`),  
8   KEY `fk_pais_pais_idx` (`id_pais_representado`),  
9   CONSTRAINT `fk_pais_pais` FOREIGN KEY (`id_pais_representado`) REFERENCES `pais` (`id`) ON DELETE RESTRICT ON UPDATE CASCADE  
10 ) ENGINE=InnoDB AUTO_INCREMENT=5 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

8

ajedrez_con_model.mwb - MySQL Workbench

Local Instance 3306 MySQL Model Diagrama_ajedrez

File Edit View Query Database Server Tools Scripting Help

Schemas

ajedrez

Tables

hotel

hotel_participante

jugador_partida

movimiento

pais

participante_camp

participantes

partida

sala

sala_medios

Views

Stored Procedures

Functions

sys

Tables

Object Info Session

Table: sala_medios

Columns:

id_sala int PK

medio varchar(100)

PK

DDL for ajedrez.participante_campeonato

```
1 CREATE TABLE `participante_campeonato` (  
2   `id_participante` int NOT NULL,  
3   `nombre_campeonato` varchar(50) COLLATE utf8mb4_spanish_ci NOT NULL,  
4   `tipo` enum('local','nacional','internacional','mundial') COLLATE utf8mb4_spanish_ci DEFAULT 'nacional',  
5   PRIMARY KEY (`id_participante`),  
6   CONSTRAINT `fk_participante_campeonato` FOREIGN KEY (`id_participante`) REFERENCES `participantes` (`id`) ON DELETE CASCADE ON UPDATE CASCADE  
7 ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

9

ajedrez_con_model.mwb - MySQL Workbench

Schemas: Local Instance 3306 MySQL Model Diagrama ajedrez

ajedrez.participantes

DDL for ajedrez.participantes

```
1 CREATE TABLE `participantes` (  
2   `id` int NOT NULL AUTO_INCREMENT,  
3   `apellidos` varchar(80) COLLATE utf8mb4_spanish_ci NOT NULL,  
4   `nombre` varchar(45) COLLATE utf8mb4_spanish_ci NOT NULL,  
5   `telefono` int DEFAULT NULL,  
6   `tipo` enum('jugador','arbitro') COLLATE utf8mb4_spanish_ci NOT NULL DEFAULT 'jugador',  
7   `nivel` varchar(45) COLLATE utf8mb4_spanish_ci DEFAULT NULL,  
8   `id_pais_envia` int NOT NULL,  
9   PRIMARY KEY (`id`),  
10  UNIQUE KEY `idx_nombrecompleto` (`apellidos`,`nombre`),  
11  KEY `fk_participantes_pais_idx` (`id_pais_envia`),  
12  CONSTRAINT `fk_participantes_pais` FOREIGN KEY (`id_pais_envia`) REFERENCES `pais` (`id`) ON UPDATE CASCADE  
13 ) ENGINE=InnoDB AUTO_INCREMENT=11 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Table: sala_medios

Columns:

- id_sala int PK
- medio varchar(100) PK

Action Output

#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

10

ajedrez_con_model.mwb - MySQL Workbench

Schemas: Local Instance 3306 MySQL Model Diagrama ajedrez

ajedrez.partida

DDL for ajedrez.partida

```
1 CREATE TABLE `partida` (  
2   `id` int NOT NULL,  
3   `anho` smallint NOT NULL,  
4   `mes` tinyint NOT NULL,  
5   `dia` tinyint NOT NULL,  
6   `entradas` smallint NOT NULL,  
7   `sala_id` int NOT NULL,  
8   `participantes_id` int NOT NULL,  
9   PRIMARY KEY (`id`),  
10  KEY `fk_partida_sala_idx` (`sala_id`),  
11  KEY `fk_partida_participantes_idx` (`participantes_id`),  
12  CONSTRAINT `fk_partida_arbitro` FOREIGN KEY (`participantes_id`) REFERENCES `participantes` (`id`) ON UPDATE CASCADE,  
13  CONSTRAINT `fk_partida_sala` FOREIGN KEY (`sala_id`) REFERENCES `sala` (`id`) ON UPDATE CASCADE  
14 ) ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_spanish_ci
```

Table: sala_medios

Columns:


- id_sala int PK
- medio varchar(100) PK

Action Output


#	Time	Action	Message	Duration / Fetch
42	17:54:52	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.0022 sec / 0.0000...
43	17:55:19	SELECT * FROM ajedrez.sala LIMIT 0, 1000	0 row(s) returned	0.00032 sec / 0.0000...
44	17:55:57	SELECT * FROM ajedrez.hotel_participante LIMIT 0, 1000	0 row(s) returned	0.00027 sec / 0.0000...

Query Completed

11

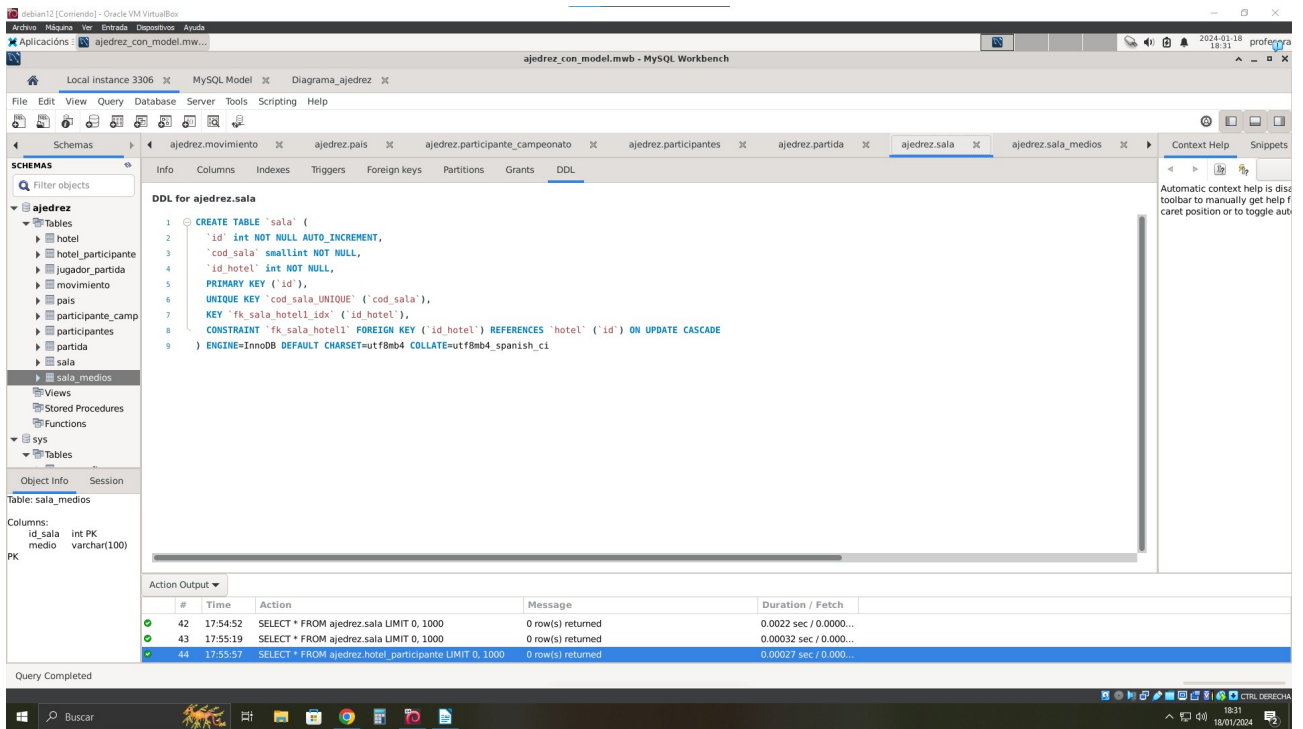

12

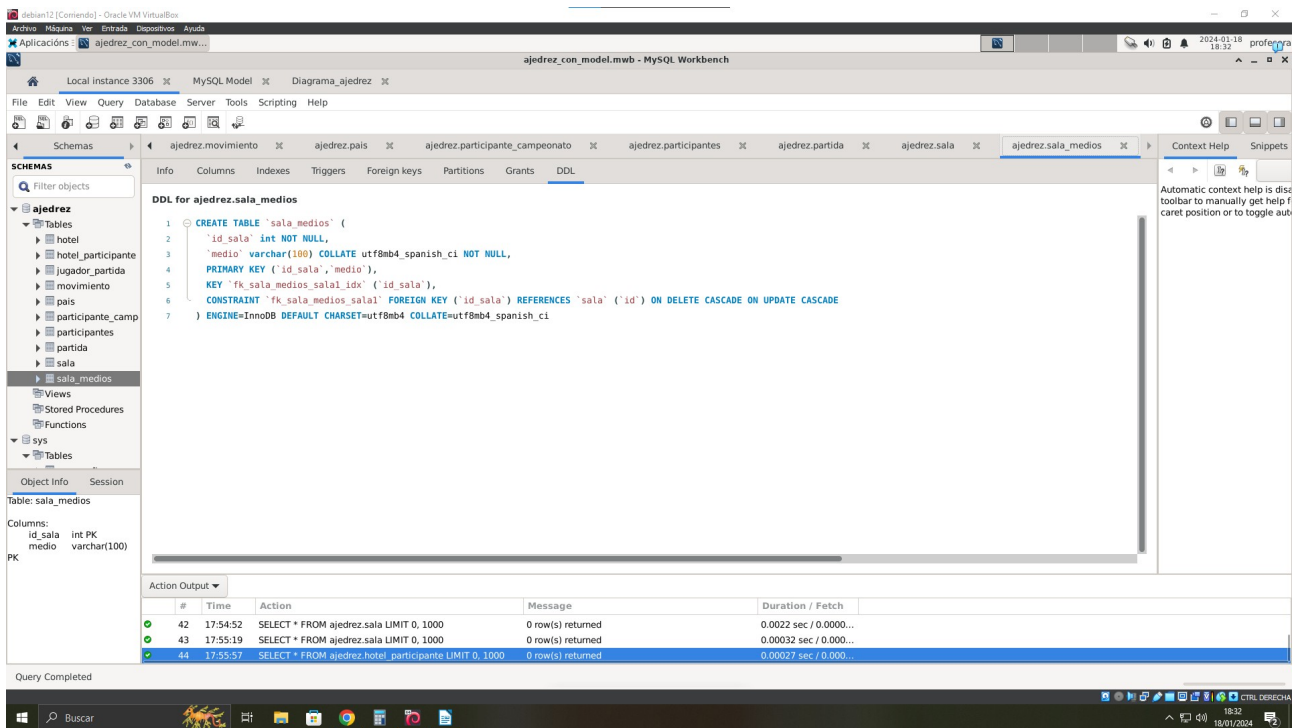

13

