Prediction of familiar video conditions in unseen participants

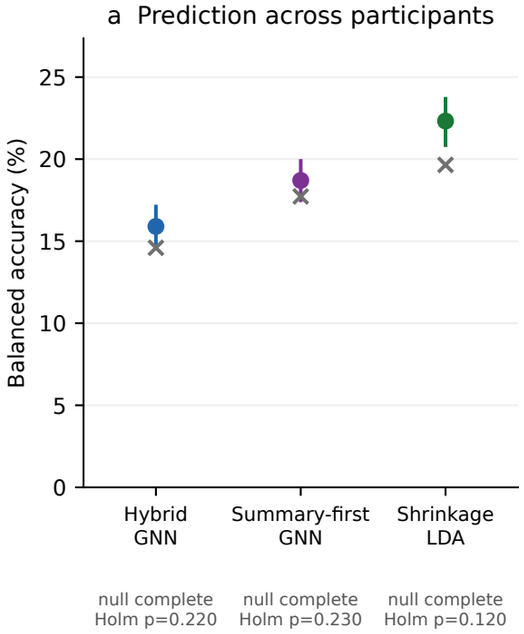

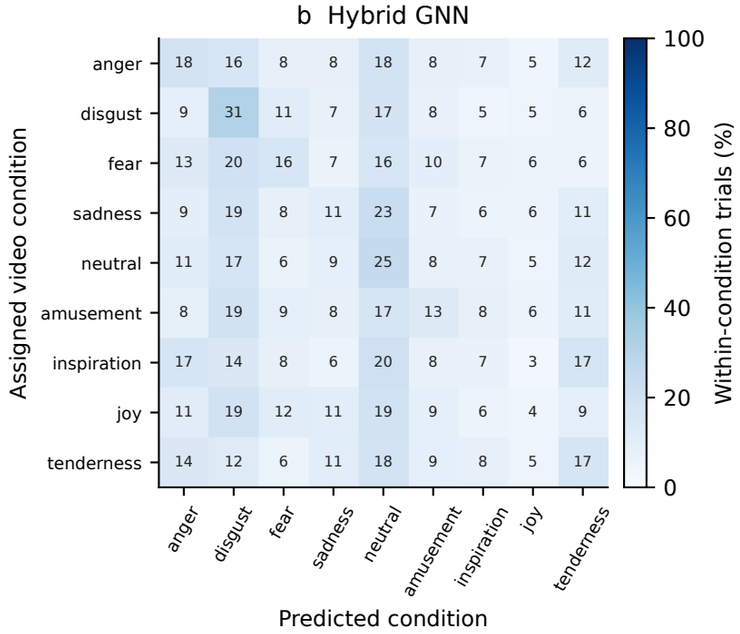

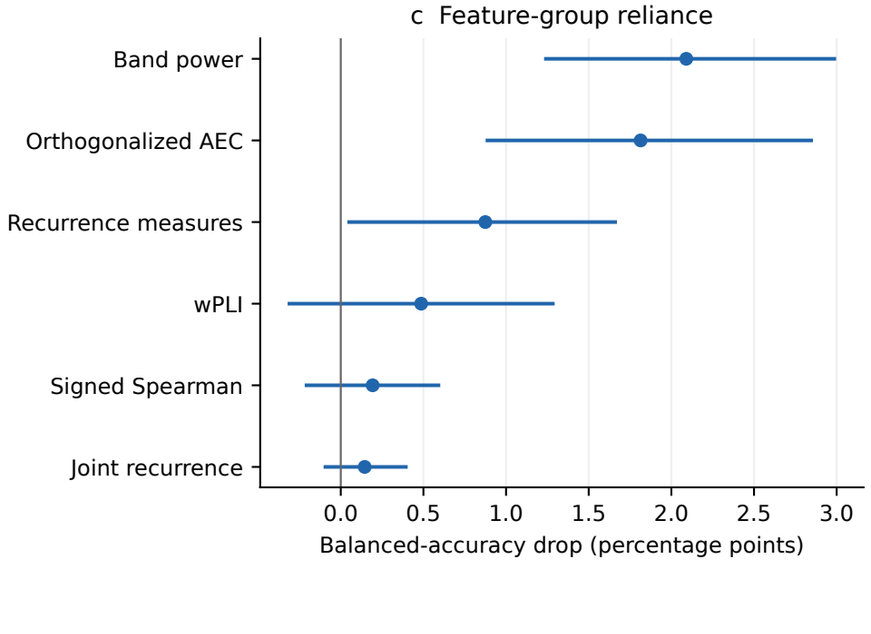

Primary seed; 95% participant-bootstrap intervals. Feature reliance is conditional on fitted models and is not causal.
Nulls shuffle video labels jointly across participants and fully refit models; inference is withheld until all planned permutations complete.