

Agricultural Statistics: Data Linking and Trends through Time – Answer key

In the last module, we used more complex data frame manipulations and calculations to calculate descriptive statistics from the Census of Agriculture. We used `unique` and `length` to calculate the number of commodities a county produces. We used `aggregate` to find the number of farms in each data category. We used `ifelse` to assign labels to data based on their attributes. In this module, we will focus on calculating trends of Census of Agriculture data through time.

Objectives:

1. Use subsets, joins, and calculations across rows to quantify 20-year change in farm size and ownership.
2. Use calculations based on a previous row (with `lag`) to quantify 20-year change in 5-year intervals for agricultural land use and agricultural sales.
3. Use the `dplyr` package for data cleaning.

Getting Started

- (1) Open RStudio and your project file. (2) Create a new Quarto file.
- (3) Download the following .csv files into your data folder from this [GitHub folder](#) if you have not already done so: `num_farms_areafiltered_tenure_1997_2017_ID.csv` (same dataset used in Module 3), `cropland_pastureland_total_acres_ID_1997-2017.csv` (same dataset used in Module 2), `ag_sales_ID_1997-2017.csv`, and `ag_expenses_ID_1997-2017.csv`.

Trends in farm size and ownership

- (4) Create a new code chunk and use `read.csv` to read in the data from `num_farms_areafiltered_tenure_1997_2017_ID.csv`. We used this dataset in Module 3 – it has information about the number of farms in different ownership and size categories. (5) Subset the data to your county. (6) Use two lines of code with the `unique` function to print the unique entries in the columns `Year` and `Domain`. For more clarity, you can click the subset in the Environment tab to display the whole data frame.

```
sizes <- read.csv("data/num_farms_areafiltered_tenure_1997_2017_ID.csv")

my_county_size_tenure <- subset(sizes, County == "BEAR LAKE")

print(unique(my_county_size_tenure$Year))
```

```
[1] 2017 1997
```

```
print(unique(my_county_size_tenure$Domain))
```

```
[1] "AREA OPERATED" "TENURE"          "TOTAL"
```

- (7) Check the data type of the `Value` column. If the data type is `"character"`, use `as.numeric`, as well as `str_remove_all` if necessary, to convert the `Value` column to numbers (see Module 3 (8)).

```
class(my_county_size_tenure$Value)
```

```
[1] "character"
```

```
library(stringr)

my_county_size_tenure$Value <- str_remove_all(my_county_size_tenure$Value, ",")
my_county_size_tenure$Value <- as.numeric(my_county_size_tenure$Value)

class(my_county_size_tenure$Value)
```

```
[1] "numeric"
```

We want to calculate how the number of farms in these categories has changed in the last 20 years. (8) Make **two** subsets: one for 2017 data and one for 1997 data.

```
my_county_size_tenure_2017 <- subset(my_county_size_tenure, Year == 2017)
my_county_size_tenure_1997 <- subset(my_county_size_tenure, Year == 1997)
```

(9) Save the total number of farms in each year in two objects called **total_farms_2017** and **total_farms_1997** by retrieving the number in the **Value** column where **Domain** is equal to **TOTAL** in each of the two subsets you created in step (8).

```
total_farms_2017 <- subset(my_county_size_tenure_2017, Domain == 'TOTAL')$Value
total_farms_1997 <- subset(my_county_size_tenure_1997, Domain == 'TOTAL')$Value
```

(10) Print the number of farms in your county in 2017 and add it to the shared Google sheet.

```
print(total_farms_2017)
```

```
[1] 395
```

(11) Subtract the number of farms in 1997 from the number of farms in 2017. Record the result in the shared Google sheet. A negative number indicates a loss of farms.

```
total_farms_2017 - total_farms_1997
```

```
[1] -56
```

A raw number of change can be useful, but it's more useful to us if we put it in context. A loss of 56 farms is trivial in a county with thousands of farms, but more concerning in a county with 100 farms. Therefore, we want to calculate the percent change as well as the total change.

(12) Divide the total change in farms by the total number of farms in 1997, then multiply by 100 to calculate percent change. Add this value to the shared Google sheet.

```
(total_farms_2017 - total_farms_1997) / total_farms_1997 * 100
```

```
[1] -12.41685
```

It can be helpful to interpret these results in plain language. I would present these results in this way: “Bear Lake County lost 56 of its farms between 1997 and 2017, a reduction of 12%.”

(13) Write a similar statement to interpret the results for your county.

In module 3, we applied an equation to an entire column and saved the result in a new column. We can not only apply an equation to a single column, but also create equations with two or more columns.

First, we need to make sure they are lined up correctly. We will line up the number of farms in 1997 and 2017 for each category, and then find the difference for every row. This is the power of coding – we don’t have to repeat steps (10)-(11) over and over again!

To do this, we’re going to need to do a bit of data cleaning. The best library to do this is called `dplyr`. We can accomplish a lot of things with the base R code we’ve learned so far, but it gets complicated and hard to read very quickly. `dplyr` is generally a better choice for complicated data cleaning, especially if anyone else is going to collaborate with you.

(14) Run `install.packages("dplyr")` in the Console. **(15)** Create a new code chunk and read in the `dplyr` library with `library(dplyr)`.

```
library(dplyr)
```

You may have noticed that our data has a lot of extra columns we’re not using. It wasn’t a big problem in other modules, but it can make joining columns tedious. We’re going to use the `select` function from `dplyr` to grab just the columns we’ll need for this calculation. **(16)** Use the code below to select the columns `Domain.Category` and `Value` from your two subsets (you may change the object names).

```
my_county_size_tenure_2017_selected <- select(my_county_size_tenure_2017,
                                             c(Domain.Category, Value))

my_county_size_tenure_1997_selected <- select(my_county_size_tenure_1997,
                                             c(Domain.Category, Value))
```

You can read the first lines as: from `my_county_size_tenure_2017`, select the columns `Domain.Category` and `Value`.

Notice that the columns names are *not* in quotes here, but we still use the `c()` function to list out multiple names. **(17)** Print the `colnames` for each of these data frames. Make sure that only `Domain.Category` and `Value` remain.

```
colnames(my_county_size_tenure_2017_selected)
```

```
[1] "Domain.Category" "Value"
```

```
colnames(my_county_size_tenure_1997_selected)
```

```
[1] "Domain.Category" "Value"
```

Now, we are going to **join** the two data frames together. There are a lot of different types of joins (if you're interested, see more examples [here](#)), but we are going to exclusively use the function `full_join` from `dplyr`.

`full_join` figures out which rows should match based on a key or multiple key columns. We will use `Domain.Category` as our key. We will also specify suffixes for our value columns so we know which year applies to each column. For a visual representation of this process, see Figure 1 on the next page.

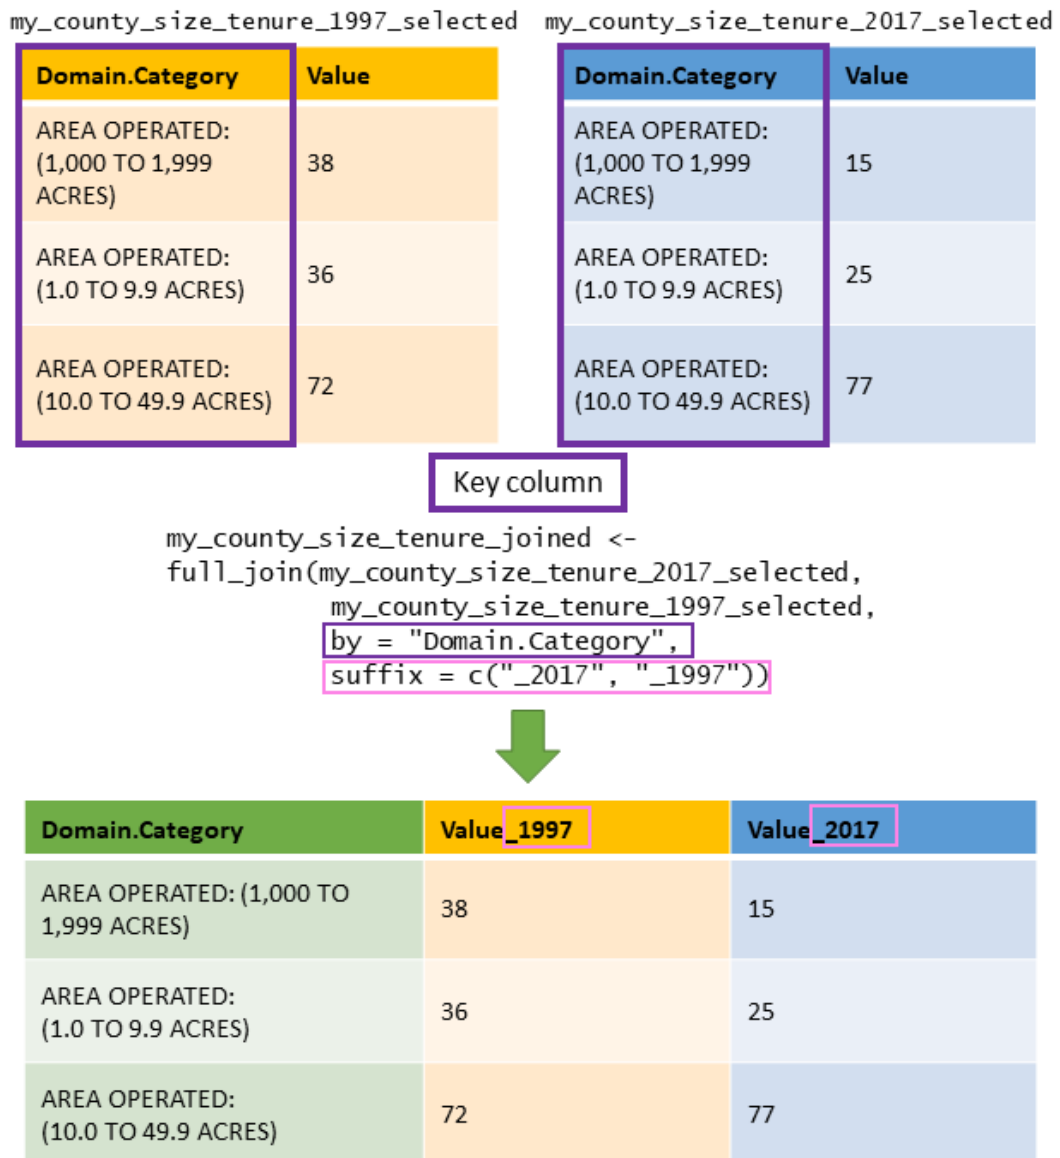


Figure 1: Joining two data frames based on a key column

(18) Use the code below to join the 2017 and the 1997 data into one data frame.

```
my_county_size_tenure_joined <- full_join(my_county_size_tenure_2017_selected,
                                          my_county_size_tenure_1997_selected,
                                          by = "Domain.Category",
                                          suffix = c("_2017", "_1997"))
```

(19) Print the `head` or `tail` of the result and check that it looks right. Are the numbers for 2017 and 1997 similar in each row? You may also want to refer to the two data frames you joined and spot check to see if the numbers ended up in the correct rows.

```
head(my_county_size_tenure_joined)
```

	Domain.Category	Value_2017	Value_1997
1	AREA OPERATED: (1,000 TO 1,999 ACRES)	15	38
2	AREA OPERATED: (1.0 TO 9.9 ACRES)	25	36
3	AREA OPERATED: (10.0 TO 49.9 ACRES)	77	72
4	AREA OPERATED: (100 TO 139 ACRES)	38	40
5	AREA OPERATED: (140 TO 179 ACRES)	20	21
6	AREA OPERATED: (180 TO 219 ACRES)	11	22

Now, we can find the difference for every row at the same time. (20) Create a new column called `Difference`, subtract the `Value_2017` column from the `Value_1997` column and save it in the new column, and print the `head` of the result.

```
my_county_size_tenure_joined$Difference <-
  my_county_size_tenure_joined$Value_2017 -
  my_county_size_tenure_joined$Value_1997
```

```
head(my_county_size_tenure_joined)
```

	Domain.Category	Value_2017	Value_1997	Difference
1	AREA OPERATED: (1,000 TO 1,999 ACRES)	15	38	-23
2	AREA OPERATED: (1.0 TO 9.9 ACRES)	25	36	-11
3	AREA OPERATED: (10.0 TO 49.9 ACRES)	77	72	5
4	AREA OPERATED: (100 TO 139 ACRES)	38	40	-2
5	AREA OPERATED: (140 TO 179 ACRES)	20	21	-1
6	AREA OPERATED: (180 TO 219 ACRES)	11	22	-11

(21) Create a subset of this data where the `Domain.Category` contains the word `TENURE` (hint: use `str_detect`). (22) Print the columns `Domain.Category` and `Difference` in your tenure subset, and report the changing number of farms in each category of farm ownership on the shared Google sheet.

```
tenure_change <- subset(my_county_size_tenure_joined,
                        str_detect(Domain.Category, "TENURE"))

print(tenure_change[,c("Domain.Category", "Difference")])
```

	Domain.Category	Difference
13	TENURE: (FULL OWNER)	-9
14	TENURE: (PART OWNER)	-34
15	TENURE: (TENANT)	-13

(23) Divide the Difference column by the Value_1997 column in your tenure subset and multiply that value by 100. Save the result in a new column called Percent_difference and report your results in the shared Google sheet.

```
tenure_change$Percent_difference <-
  tenure_change$Difference / tenure_change$Value_1997 * 100

print(tenure_change[,c("Domain.Category", "Percent_difference")])
```

	Domain.Category	Percent_difference
13	TENURE: (FULL OWNER)	-3.396226
14	TENURE: (PART OWNER)	-21.935484
15	TENURE: (TENANT)	-41.935484

Next, let's do the same with the size categories. We need to use the aggregating method we used in module 3 (refer to Module 3 (32)-(42)). (24) Create a subset of this data where the Domain.Category contains the word AREA. (25) Create a new column called label and fill it with NA.

```
my_county_sizes <- subset(my_county_size_tenure_joined, str_detect(Domain.Category, "AREA"))

my_county_sizes$label <- NA
```

(26) Use ifelse to test if Domain.Category contains “,000”. Every category with this pattern is over 1,000 acres. If yes, then let label be “Large farms.” If no, let label keep its current value.


```
my_county_sizes$label <- ifelse(test =
                                str_detect(string = my_county_sizes$Domain.Category,
                                             pattern = ",000"),
                                yes = "Large farms",
                                no = my_county_sizes$label)
```

(27) Use `ifelse` to test if `Domain.Category` contains a period. If yes, then let `label` be “Small farms.” If no, let `label` keep its current value.

```
my_county_sizes$label <- ifelse(test =
                                str_detect(string = my_county_sizes$Domain.Category,
                                             pattern = "\\."),
                                yes = "Small farms",
                                no = my_county_sizes$label)
```

(28) Finally, use `ifelse` to test if `label` still equals NA (hint: use the function `is.na` instead of `str_detect`). If yes, then let `label` be “Mid-sized farms.” If no, let `label` keep its current value.

```
my_county_sizes$label <- ifelse(test = is.na(my_county_sizes$label),
                                yes = "Mid-sized farms",
                                no = my_county_sizes$label)
```

(29) Print the `Domain.Category` and `label` columns of your area data frame to check the result of this code.

```
print(my_county_sizes[,c("Domain.Category", "label")])
```

	Domain.Category	label
1	AREA OPERATED: (1,000 TO 1,999 ACRES)	Large farms
2	AREA OPERATED: (1.0 TO 9.9 ACRES)	Small farms
3	AREA OPERATED: (10.0 TO 49.9 ACRES)	Small farms
4	AREA OPERATED: (100 TO 139 ACRES)	Mid-sized farms
5	AREA OPERATED: (140 TO 179 ACRES)	Mid-sized farms
6	AREA OPERATED: (180 TO 219 ACRES)	Mid-sized farms
7	AREA OPERATED: (2,000 OR MORE ACRES)	Large farms
8	AREA OPERATED: (220 TO 259 ACRES)	Mid-sized farms
9	AREA OPERATED: (260 TO 499 ACRES)	Mid-sized farms
10	AREA OPERATED: (50.0 TO 69.9 ACRES)	Small farms
11	AREA OPERATED: (500 TO 999 ACRES)	Mid-sized farms
12	AREA OPERATED: (70.0 TO 99.9 ACRES)	Small farms

We're going to use the `dplyr` version of `aggregate`, called `summarise`, since we want to keep two columns: `Value_1997` and `Difference`. (30) Use the code below to summarise the number of farms in 1997 and the 20-year difference in each category. (The `#` lines are comments to tell you what the line above or next to them does.)

```
my_county_sizes_agg <- summarise(my_county_sizes,
                                .by = label,
                                Value_1997_sum = sum(Value_1997, na.rm = TRUE),
                                Difference_sum = sum(Difference, na.rm = TRUE))
```

(31) Print the summarised data frame and record the difference of number of farms in each category in the shared Google sheet.

```
print(my_county_sizes_agg)
```

	label	Value_1997_sum	Difference_sum
1	Large farms	58	-1
2	Small farms	150	3
3	Mid-sized farms	243	-58

(32) Divide the `Difference_sum` column by the `Value_1997_sum` column in your farm sizes data frame and multiply that value by 100. Save the result in a new column called `Percent_difference` and report your results in the shared Google sheet.

```
my_county_sizes_agg$Percent_difference <-
  my_county_sizes_agg$Difference_sum / my_county_sizes_agg$Value_1997_sum * 100
print(my_county_sizes_agg)
```

	label	Value_1997_sum	Difference_sum	Percent_difference
1	Large farms	58	-1	-1.724138
2	Small farms	150	3	2.000000
3	Mid-sized farms	243	-58	-23.868313

Agricultural Land Use Change

(33) Create a new code chunk and use `read.csv` to read in the data from `cropland_pastureland_total_acres_ID_1997-2017.csv`. We used this dataset in Module 2 – it has information about the amount of land used for cropland, pastureland, and the total land in each county. (34) Subset the data to your county. (35) Use two lines of code with the `unique`

function to print the unique entries in the columns `Year` and `Data.Item`. For more clarity, you can click the subset in the Environment tab to display the whole data frame.

```
agland <- read.csv("data/cropland_pastureland_total_acres_ID_1997-2017.csv")

my_county_agland <- subset(agland, County == "BEAR LAKE")

print(unique(my_county_agland$Year))
```

```
[1] 2017 2012 2007 2002 1997
```

```
print(unique(my_county_agland$Data.Item))
```

```
[1] "AG LAND, CROPLAND - ACRES"      "AG LAND, PASTURELAND - ACRES"
[3] "LAND AREA, INCL NON-AG - ACRES"
```

(36) Check the data type of the `Value` column in the land use subset you created in in step 33. If the data type is `"character"`, use `as.numeric`, as well as `str_remove_all` if necessary, to convert the `Value` column to numbers.

```
class(my_county_agland$Value)
```

```
[1] "character"
```

```
my_county_agland$Value <- str_remove_all(my_county_agland$Value, ",")
my_county_agland$Value <- as.numeric(my_county_agland$Value)

class(my_county_agland$Value)
```

```
[1] "numeric"
```

Next, we need to separate the total land in each year from the agricultural land in each year.

(37) Create a subset of this data frame where `Data.Item` contains the string `"LAND AREA, INCL NON-AG"` (hint: use `str_detect`). Print the result.

```
my_county_land <-
  subset(my_county_agland, str_detect(Data.Item, "LAND AREA, INCL NON-AG"))

print(my_county_land)
```

	Program	Year	Period	Week.Ending	Geo.Level	State	State.ANSI	Ag.District
6	CENSUS	2017	YEAR	NA	COUNTY	IDAHO	16	EAST
138	CENSUS	2012	YEAR	NA	COUNTY	IDAHO	16	EAST
270	CENSUS	2007	YEAR	NA	COUNTY	IDAHO	16	EAST
402	CENSUS	2002	YEAR	NA	COUNTY	IDAHO	16	EAST
	Ag.District.Code	County	County.ANSI	Zip.Code	Region	watershed_code		
6	90	BEAR LAKE	7	NA	NA	0		
138	90	BEAR LAKE	7	NA	NA	0		
270	90	BEAR LAKE	7	NA	NA	0		
402	90	BEAR LAKE	7	NA	NA	0		
	Watershed	Commodity			Data.Item	Domain	Domain.Category	
6	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES	TOTAL	NOT	SPECIFIED	
138	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES	TOTAL	NOT	SPECIFIED	
270	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES	TOTAL	NOT	SPECIFIED	
402	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES	TOTAL	NOT	SPECIFIED	
	Value	CV....						
6	624466	(L)						
138	623915	(L)						
270	623871							
402	621684							

(38) To prepare this data for joining, `aggregate` or `summarise` (your choice) the `Value` column by `Year`.

```
# summarise
my_county_land <- summarise(my_county_land, .by=Year,
                             Value = sum(Value, na.rm=TRUE))

# aggregate
my_county_land <- aggregate(Value ~ Year, data = my_county_land, sum)
```

To create a data frame of agricultural land for each year, we simply need to flip the selection you just used and subset to all the rows that do *not* contain the string "LAND AREA, INCL NON-AG". In R, an exclamation point means "not." For example, `!=` means "not equal to."

(39) Create a new code chunk, copy and paste the subset code you used in step (37), change the name of the subset object to indicate that this is a subset of agricultural land, and add a `!` in front of `str_detect`. (40) Print the unique values in the `Data.Item` column of your new subset to check that the code worked.

```
my_county_agland <-
  subset(my_county_agland, !str_detect(Data.Item, "LAND AREA, INCL NON-AG"))
```

```
print(unique(my_county_agland$Data.Item))
```

```
[1] "AG LAND, CROPLAND - ACRES"      "AG LAND, PASTURELAND - ACRES"
```

(41) Find the sum of cropland and pastureland acres in each year for your county. You can use `aggregate` or `summarise`. (Hint: find the sum of `Value` by `Year`.)

```
#summarise
my_county_agland <- summarise(my_county_agland, .by = Year,
                              Value = sum(Value, na.rm=TRUE))
```

```
# aggregate
my_county_agland <- aggregate(Value ~ Year, data=my_county_agland, sum)
```

(42) Use `full_join` to join your agricultural land and total land subsets. Make sure to use suffixes that make sense to you.

```
my_county_land_join <- full_join(my_county_agland,
                                 my_county_land,
                                 by="Year",
                                 suffix = c("_ag", "_total"))
```

(43) Print the result.

```
print(my_county_land_join)
```

	Year	Value_ag	Program	Period	Week.Ending	Geo.Level	State	State.ANSI
1	1997	250982	<NA>	<NA>	NA	<NA>	<NA>	NA
2	2002	227022	CENSUS	YEAR	NA	COUNTY	IDAHO	16
3	2007	244197	CENSUS	YEAR	NA	COUNTY	IDAHO	16
4	2012	259186	CENSUS	YEAR	NA	COUNTY	IDAHO	16
5	2017	303091	CENSUS	YEAR	NA	COUNTY	IDAHO	16
	Ag.District	Ag.District.Code	County	County.ANSI	Zip.Code	Region		
1	<NA>	NA	<NA>	NA	NA	NA	NA	
2	EAST	90	BEAR LAKE	7	NA	NA		
3	EAST	90	BEAR LAKE	7	NA	NA		
4	EAST	90	BEAR LAKE	7	NA	NA		
5	EAST	90	BEAR LAKE	7	NA	NA		
	watershed_code	Watershed	Commodity				Data.Item	Domain

1	NA	NA	<NA>	<NA>	<NA>
2	0	NA	LAND AREA	LAND AREA, INCL NON-AG - ACRES	TOTAL
3	0	NA	LAND AREA	LAND AREA, INCL NON-AG - ACRES	TOTAL
4	0	NA	LAND AREA	LAND AREA, INCL NON-AG - ACRES	TOTAL
5	0	NA	LAND AREA	LAND AREA, INCL NON-AG - ACRES	TOTAL

	Domain.Category	Value_total	CV....
1	<NA>	NA	<NA>
2	NOT SPECIFIED	621684	
3	NOT SPECIFIED	623871	
4	NOT SPECIFIED	623915	(L)
5	NOT SPECIFIED	624466	(L)

For the next few lines of code to work, we need to arrange the years from earliest (1997) in row 1 to latest (2017) in the last row. Your data may already be in this order. (44) If it is not, use the code below to use the `dplyr` function `arrange` to organize the rows of your data by `Year`.

```
my_county_land_join <- arrange(my_county_land_join,
                                Year)
```

A quirk of this data is that the Census of Agriculture did not start recording the total land in each county until 2002. We can pretty safely assume that the total land in each county was about the same in 1997 as it was in 2002. The code below takes the number in the `Value_total` column, row 2 and copies it into the `Value_total` column, row 1. (45) Use the code below to fill in the 1997 total land spot. Make sure to modify this code if your object or column names are different.


```
my_county_land_join$Value_total[1] <- my_county_land_join$Value_total[2]
```

(46) Create a new column, calculate the percent of county land that was used for agriculture in each year, and save the values in the new column.

```
my_county_land_join$Perc_ag <-
  my_county_land_join$Value_ag / my_county_land_join$Value_total * 100
```

Optional challenge: (46.1) Check the results of your calculation with a simple graph. Use the code below to track the percentage of agricultural land in your county through time. Make note of any interesting trends you see.

```
plot(x = my_county_land_join$Year,
     y = my_county_land_join$Perc_ag,
     type = "l") # "l" (lowercase L) for line plot
```

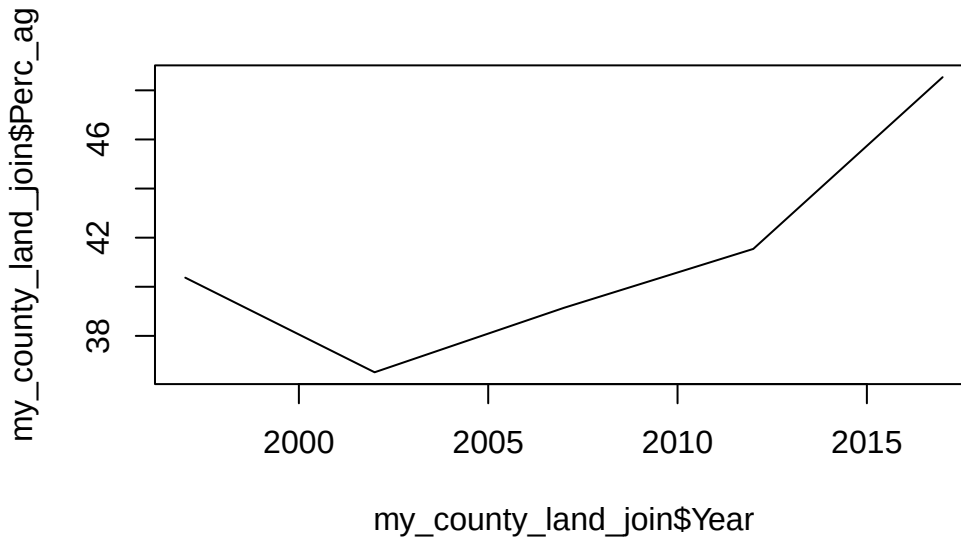

The metrics we will use to characterize this change over time are total change over 20 years and recent change from 2012 to 2017. **Optional: (46.2)** Do you see any trends in your plot that you think might be important that are not described by these two metrics? If so, please make note of it here so we can improve our research design.

(47) Use the format `data_frame[row_number, "column_name"]` in an equation to subtract the percentage of agricultural land in 1997 from the percentage of agricultural land in 2017 to find total change from 1997 to 2017. Record the value in the shared data sheet.

```
my_county_land_join[5, "Perc_ag"] - my_county_land_join[1, "Perc_ag"]
```

```
[1] 8.164715
```

Now, we are going to do the same calculation for each year so we can get the percent change of agricultural land in 5 year increments. The easiest way to refer to the previous year's value is to create a *lag* column. This will line up the values we want to subtract from each other. **(48)** Use the code below to create a new column called `Perc_lag` that contains the values of the column `Perc_ag` shifted down one cell.

```
my_county_land_join$Perc_lag <- lag(my_county_land_join$Perc_ag,
                                   n = 1)
```

(49) Check the results of this code by printing the `head` of your data frame or clicking the data frame in the Environment panel.

```
head(my_county_land_join)
```

	Year	Value_ag	Program	Period	Week.Ending	Geo.Level	State	State.ANSI
1	1997	250982	<NA>	<NA>	NA	<NA>	<NA>	NA
2	2002	227022	CENSUS	YEAR	NA	COUNTY	IDAHO	16
3	2007	244197	CENSUS	YEAR	NA	COUNTY	IDAHO	16
4	2012	259186	CENSUS	YEAR	NA	COUNTY	IDAHO	16
5	2017	303091	CENSUS	YEAR	NA	COUNTY	IDAHO	16

	Ag.District	Ag.District.Code	County	County.ANSI	Zip.Code	Region
1	<NA>	NA	<NA>	NA	NA	NA
2	EAST	90	BEAR LAKE	7	NA	NA
3	EAST	90	BEAR LAKE	7	NA	NA
4	EAST	90	BEAR LAKE	7	NA	NA
5	EAST	90	BEAR LAKE	7	NA	NA

	watershed_code	Watershed	Commodity	Data.Item	Domain
1	NA	NA	<NA>	<NA>	<NA>
2	0	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES
3	0	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES
4	0	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES
5	0	NA	LAND AREA	LAND AREA, INCL	NON-AG - ACRES

	Domain.Category	Value_total	CV....	Perc_ag	Perc_lag
1	<NA>	621684	<NA>	40.37131	NA
2	NOT SPECIFIED	621684		36.51727	40.37131
3	NOT SPECIFIED	623871		39.14223	36.51727
4	NOT SPECIFIED	623915	(L)	41.54188	39.14223
5	NOT SPECIFIED	624466	(L)	48.53603	41.54188

(50) Create a new column called `rate` that contains the `Perc_lag` column subtracted from the `Perc_ag` column.

```
my_county_land_join$rate <-
  my_county_land_join$Perc_ag - my_county_land_join$Perc_lag
```

(51) Print the columns `Year` and `rate`. (52) Record the rate for 2017 on the shared Google sheet.


```
print(my_county_land_join[,c("Year", "rate")])
```

	Year	rate
1	1997	NA
2	2002	-3.854048
3	2007	2.624961
4	2012	2.399650
5	2017	6.994152

(53) Are there any rates that stand out to you that we are not recording in our shared Google sheet? If so, make note of them in your report.

Agricultural Sales

(54) Create a new code chunk and use `read.csv` to read in the data from `ag_sales_ID_1997-2017.csv` and `ag_expenses_ID_1997-2017.csv`. These datasets have information about total agricultural sales and expenses, respectively, for 1997, 2002, 2007, 2012, and 2017.

```
sales <- read.csv("data/ag_sales_ID_1997-2017.csv")
expenses <- read.csv("data/ag_expenses_ID_1997-2017.csv")
```

(55) Subset each data frame to your county.

```
sales <- subset(sales, County == "BEAR LAKE")
expenses <- subset(expenses, County == "BEAR LAKE")
```

(56) Preview the data by printing the `head` of the columns `Year`, `Data.Item`, `Domain.Category`, and `Value` in each data frame. For more clarity, you can click the subset in the Environment tab to display the whole data frame.

```
head(sales[,c("Year", "Data.Item", "Domain.Category", "Value")])
```

	Year	Data.Item
13	2017	COMMODITY TOTALS - SALES, MEASURED IN \$
14	2017	COMMODITY TOTALS - SALES, MEASURED IN \$
15	2017	COMMODITY TOTALS - SALES, MEASURED IN \$
16	2017	COMMODITY TOTALS - SALES, MEASURED IN \$
17	2017	COMMODITY TOTALS - SALES, MEASURED IN \$
18	2017	COMMODITY TOTALS - SALES, MEASURED IN \$

	Domain.Category	Value
13	FARM SALES: (1,000 TO 2,499 \$)	31,000
14	FARM SALES: (10,000 TO 19,999 \$)	498,000
15	FARM SALES: (100,000 TO 249,999 \$)	6,097,000
16	FARM SALES: (2,500 TO 4,999 \$)	142,000
17	FARM SALES: (20,000 TO 24,999 \$)	382,000
18	FARM SALES: (25,000 TO 39,999 \$)	808,000

```
head(expenses[,c("Year", "Data.Item", "Domain.Category", "Value")])
```

	Year	Data.Item	Domain.Category
2	2017	EXPENSE TOTALS, OPERATING - EXPENSE, MEASURED IN \$	NOT SPECIFIED
46	2012	EXPENSE TOTALS, OPERATING - EXPENSE, MEASURED IN \$	NOT SPECIFIED
90	2007	EXPENSE TOTALS, OPERATING - EXPENSE, MEASURED IN \$	NOT SPECIFIED
134	2002	EXPENSE TOTALS, OPERATING - EXPENSE, MEASURED IN \$	NOT SPECIFIED
178	1997	EXPENSE TOTALS, OPERATING - EXPENSE, MEASURED IN \$	NOT SPECIFIED

	Value
2	27,108,000
46	23,859,000
90	14,806,000
134	14,094,000
178	12,679,000

(57) Check the data type of the Value columns. If the data type is "character", use `as.numeric`, as well as `str_remove_all` if necessary, to convert the Value columns to numbers in both data frames.

```
class(sales$Value)
```

```
[1] "character"
```

```
sales$Value <- str_remove_all(sales$Value, ",")
sales$Value <- as.numeric(sales$Value)
```

```
class(sales$Value)
```

```
[1] "numeric"
```

```
class(expenses$Value)
```

```
[1] "character"
```

```
expenses$Value <- str_remove_all(expenses$Value, ",")
expenses$Value <- as.numeric(expenses$Value)
```

```
class(expenses$Value)
```

```
[1] "numeric"
```

- (58) Find the sum of sales by year for your county. You can use `aggregate` or `summarise`.
(59) Do the same for expenses.

```
# with summarise
sales_by_year <- summarise(sales,
                           .by=Year,
                           Value = sum(Value, na.rm=TRUE))
expenses_by_year <- summarise(expenses,
                              .by=Year,
                              Value = sum(Value, na.rm=TRUE))

# with aggregate
sales_by_year <- aggregate(Value ~ Year, data = sales, FUN = sum)
expenses_by_year <- aggregate(Value ~ Year, data = expenses, FUN = sum)
```

- (60) Use `full_join` to join your sales and expenses subsets. Make sure to use suffixes that make sense to you. (61) Print the result.

```
profits <- full_join(sales_by_year,
                    expenses_by_year,
                    by="Year",
                    suffix=c("_sales", "_expenses"))

print(profits)
```

	Year	Value_sales	Value_expenses
1	1997	14464000	12679000
2	2002	12251000	14094000

3	2007	17303000	14806000
4	2012	29507000	23859000
5	2017	36513000	27108000

(62) If your data frame is not arranged with 1997 in row 1 to 2017 in the last row, use the code in step (44) to organize the rows of your data by **Year**.

```
profits <- arrange(profits, Year)
```

(63) Subtract the expenses column from the sales column and save the result in a new column called **profit**.

```
profits$profit <- profits$Value_sales - profits$Value_expenses
```

(Optional: 63.1) Use **plot** to visualize profits over time. Make note of anything that catches your eye about this graph.

```
plot(profits$Year, profits$profit, type="l")
```



(64) Subtract profits in 1997 from profits in 2017 to find total change in profits from 1997 to 2017. Record the value in the shared data sheet.

```
profits[5, "profit"] - profits[1, "profit"]
```

```
[1] 7620000
```

(65) Create a new column called `profits_lagged` that contains the values of the column `profit` shifted down one cell.

```
profits$lagged <- lag(profits$profit, n=1)
```

(66) Check the results of this code by printing the `head` of your data frame or clicking the data frame in the Environment panel.

```
head(profits)
```

	Year	Value_sales	Value_expenses	profit	lagged
1	1997	14464000	12679000	1785000	NA
2	2002	12251000	14094000	-1843000	1785000
3	2007	17303000	14806000	2497000	-1843000
4	2012	29507000	23859000	5648000	2497000
5	2017	36513000	27108000	9405000	5648000

(67) Create a new column called `rate` that contains the `profits_lagged` column subtracted from the `profit` column.

```
profits$rate <- profits$profit - profits$lagged
```

(68) Print the columns `Year` and `rate`.

```
print(profits[, c("Year", "rate")])
```

	Year	rate
1	1997	NA
2	2002	-3628000
3	2007	4340000
4	2012	3151000
5	2017	3757000

(69) Record the rate for 2017 on the shared Google sheet.

(70) Are there any rates that stand out to you that we are not recording in our shared Google sheet? If so, make note of them in your report.

Finishing up

(71) At the end of your report, copy this list and paste it outside of a code chunk to create bullet points. Fill in the data you calculated for your county. Make sure that all of this information is also in the team Google Sheet for comparison with other counties. If you calculated anything extra that not on this list, be sure to add it so you have a record for later.

- Number of farms in 2017:
- Change in number of farms, 1997-2017:
- Percent change of farms, 1997-2017:
- Change in number of full-owned farms, 1997-2017:
- Change in number of part-owned farms, 1997-2017:
- Change in number of tenant-operated farms, 1997-2017:
- Percent change of full-owned farms, 1997-2017:
- Percent change of part-owned farms, 1997-2017:
- Percent change of tenant-operated farms, 1997-2017:
- Change in number of small farms, 1997-2017:
- Change in number of mid-sized farms, 1997-2017:
- Change in number of large farms, 1997-2017:
- Percent change of small farms, 1997-2017:
- Percent change of mid-sized farms, 1997-2017:
- Percent change of large farms, 1997-2017:
- Percent change of agricultural land, 1997-2017:
- Recent percent change of agricultural land, 2012-2017:
- Change in agricultural profits, 1997-2017:
- Recent change in agricultural profits, 2012-2017:

(72) Go back through your report and add short explanations for what each code chunk does in your own words if you haven't done so already. (73) Render your report to a PDF and email it to [INSERT EMAIL HERE].

Statement of original and referenced work:

The entirety of this module is original work authored by Carolyn Koehn.

License

This module is licensed under a [Creative Commons Attribution-ShareAlike 4.0 International License \(CC BY-SA 4.0\)](#).