

# Predicting LIDAR Intensity from RGB and Depth Images

Project Report in computer science

vorgelegt von

**Carsten Schmotz**

geb. am 23.09.1996 in Dachau

angefertigt am

**Department Informatik**  
**Lehrstuhl Graphische Datenverarbeitung**  
**Friedrich-Alexander-Universität Erlangen-Nürnberg**

Betreuer: Richard Marcus

Betreuender Hochschullehrer: Prof. Dr. Marc Stamminger

Beginn der Arbeit: 22.07.2024

Abgabe der Arbeit: 29.07.2024

---

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Motivation . . . . .	3
1.2	Contribution . . . . .	3
1.3	Related Work . . . . .	3
<b>2</b>	<b>Preparations</b>	<b>5</b>
<b>3</b>	<b>Predicting LIDAR Intensity from RGB and Depth Images</b>	<b>7</b>
3.1	Setup . . . . .	7
3.2	Implementation . . . . .	7
3.3	Results . . . . .	7
<b>4</b>	<b>Conclusion</b>	<b>9</b>
4.1	Appendix . . . . .	9
4.2	References . . . . .	9



### **Abstract**

This report explores the application of the Pix2Pix network for predicting LiDAR intensity maps using RGB images and depth information as additional input. The used dense depth maps are created from the rgb images process through Bilateral Propagation Network for Depth Completion and the DepthAnything models (v1 and v2). This approach used rgb pictures from the kitti dataset and demonstrates significant improvements in prediction accuracy and robustness over conventional methods



# Chapter 1

## Introduction

### 1.1 Motivation

LiDAR sensors provide critical depth information for autonomous driving and robotics. The LiDAR intensity maps are often sparse and incomplete. Using depth maps as an additional input is a way to improve the richness and accuracy of the LiDAR prediction. The Pix2Pix network for image-to-image translation offers a promising approach for integrating these modalities.

### 1.2 Contribution

This project explores the use of the Pix2Pix network to predict LiDAR intensity maps by leveraging RGB images and depth maps as additional inputs

### 1.3 Related Work

bpnet depth anything v1 2 and metric change pix2pix to 4 dim input






## Chapter 2

# Preparations

used google colab, pix2pix network getting the right input, pix2pix problems

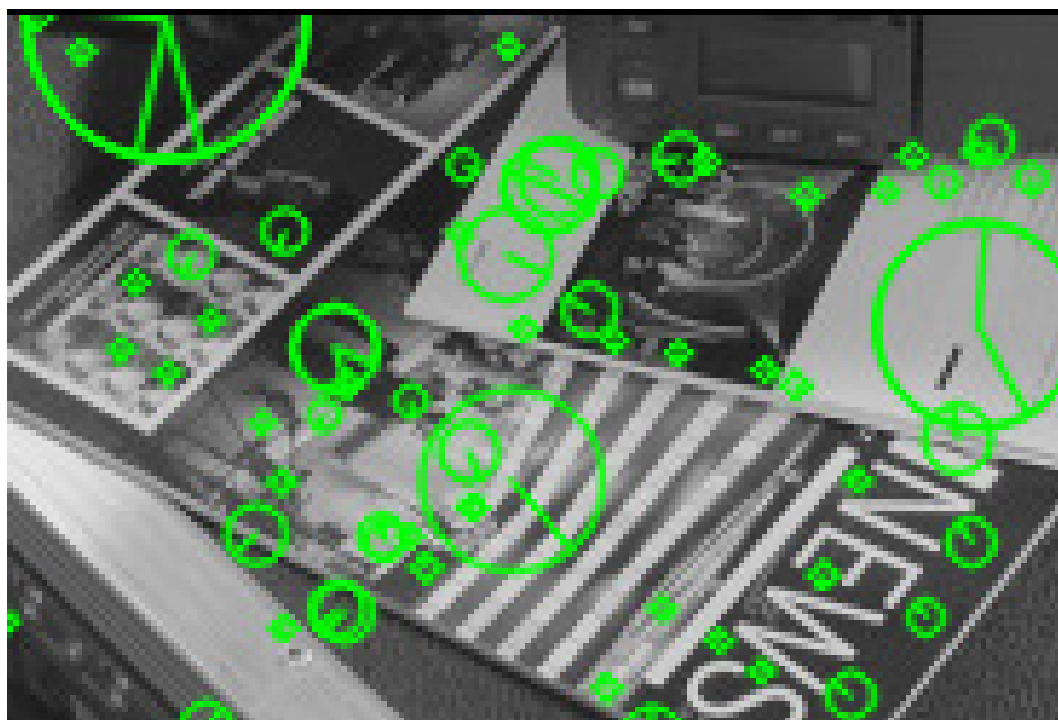

**Figure 2.1:** caption.



## Chapter 3

# Predicting LIDAR Intensity from RGB and Depth Images

### 3.1 Setup

used the bp net it is for depth completion and depth prediction pix2pix model with modified data loader to get 4 dim. input rgb plus depth

### 3.2 Implementation

### 3.3 Results

test run rgb only. depht from depthanything the depth from depthanything v2 and metriv from depthanything v2 6 runs with different solution



## Chapter 4

# Conclusion

### 4.1 Appendix

### 4.2 References

bp net work pix2pix depth anything v1 2 paper for them some for lidar intensity



# List of Figures

2.1	caption. . . . .	5
-----	------------------	---