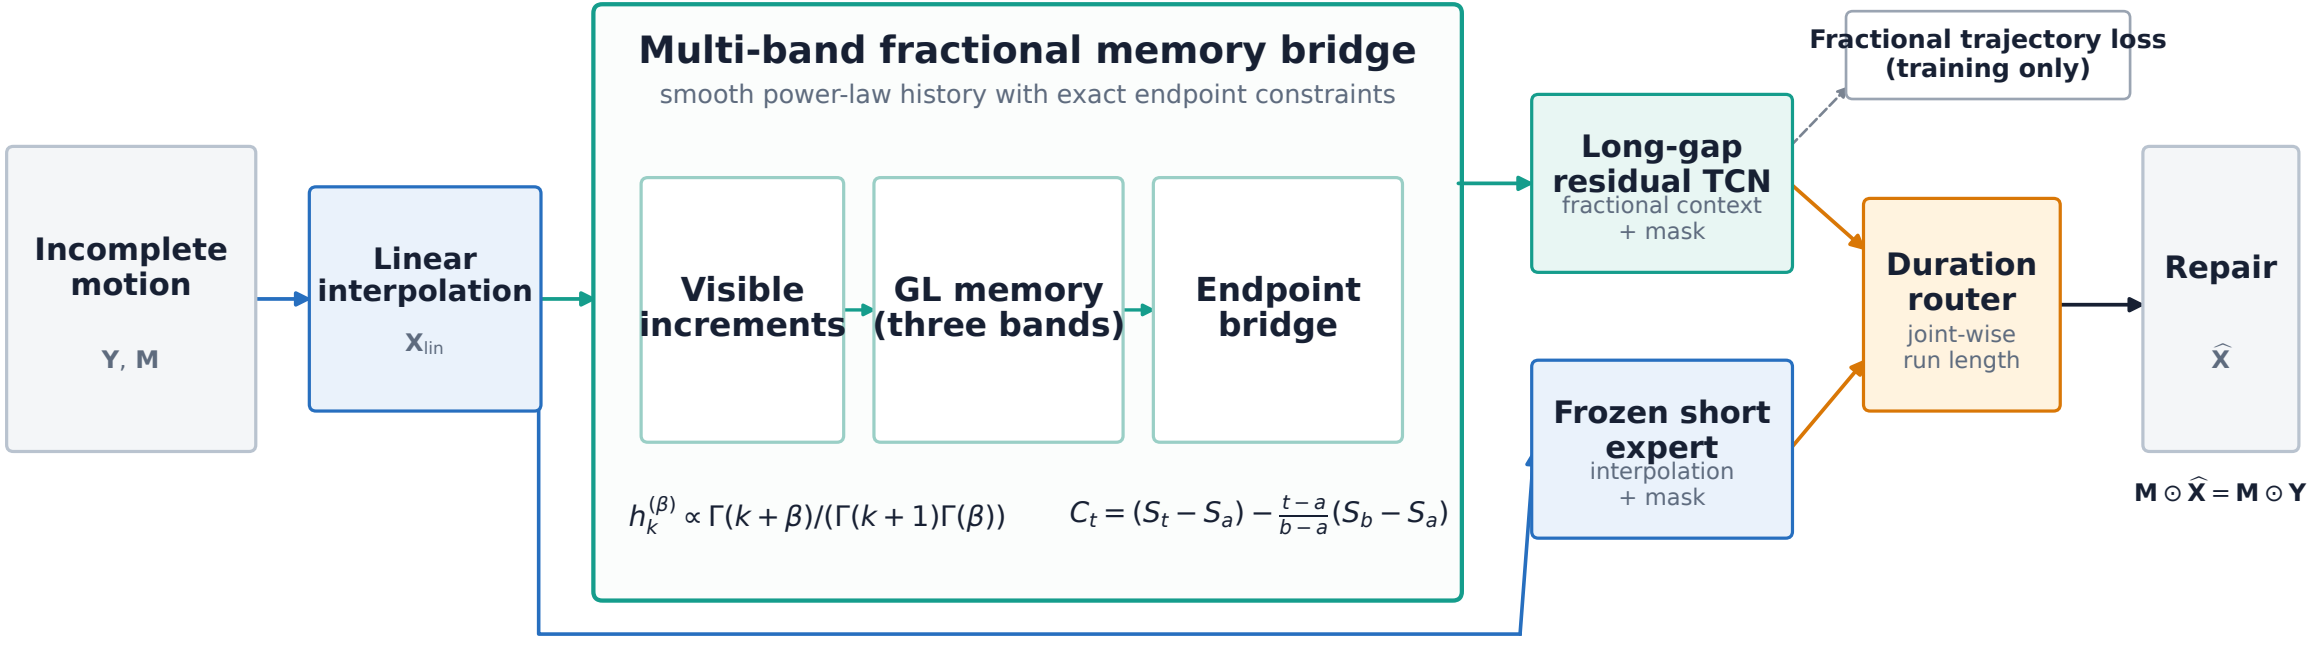
Incomplete motion
Y, M
Linear interpolation
X_{lin}
Multi-band fractional memory bridge
smooth power-law history with exact endpoint constraints
Visible increments
GL memory (three bands)
Endpoint bridge
$h_k^{(\beta)} \propto \Gamma(k+\beta)/(\Gamma(k+1)\Gamma(\beta))$
$C_t = (S_t - S_a) - \frac{t-a}{b-a}(S_b - S_a)$
Long-gap residual TCN
fractional context + mask
Fractional trajectory loss (training only)
Frozen short expert
interpolation + mask
Duration router
joint-wise run length
Repair
$\widehat{X}$
$M \odot \widehat{X} = M \odot Y$