```
node* p;
node* q;
p = new node;
p->next = new node;
q = p;
p = p->next;
p->next = q;
```

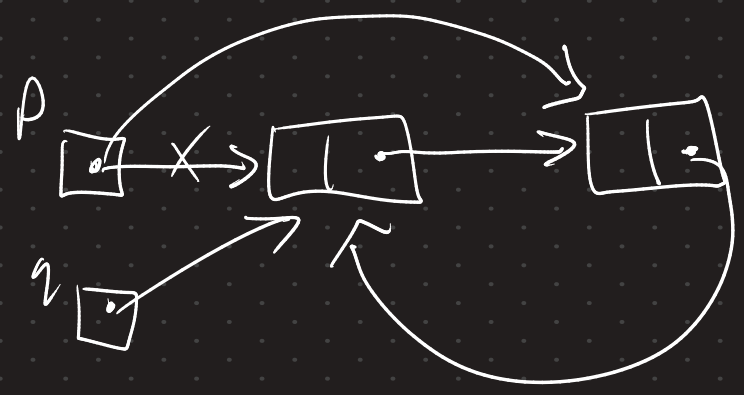

Continuing from last time: remove first node:

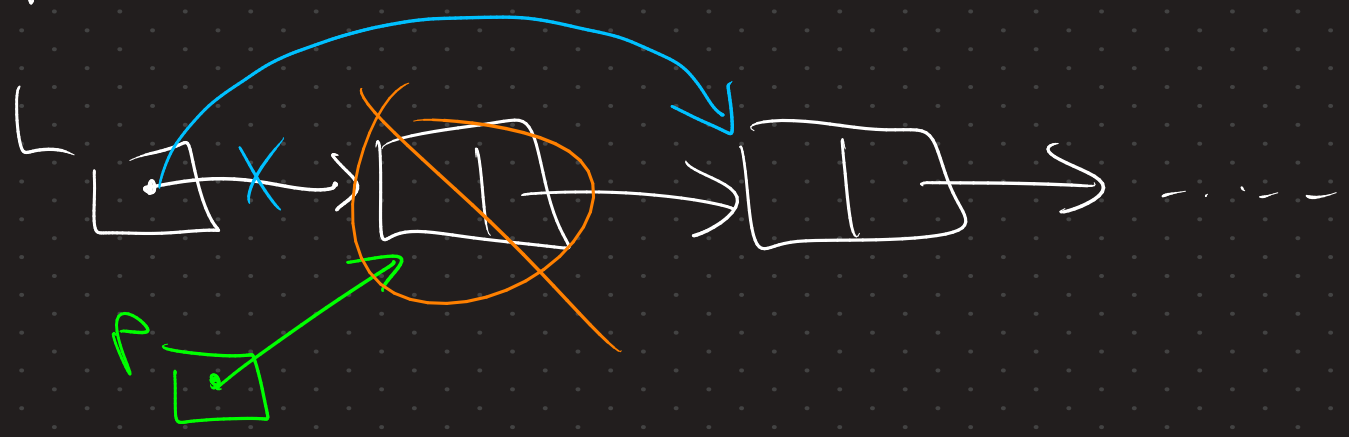


```
node* p = L;
L = L->next;
delete p;
```

Exercise: search for node with given value and remove it.

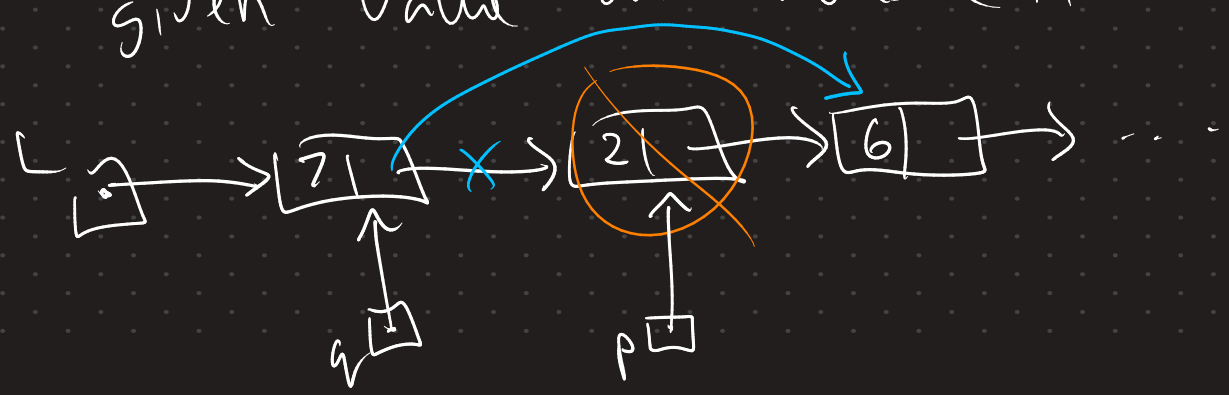

How? would be easy if we had a pointer to the node to be removed and the one right before it.

```
q->next = p->next;
delete p;
```

How to setup pointers q & p?

```
node * p = L;
node* q = ???;
while (p->data != x) {
    p = p->next;
}
```

// say int x is the value to remove.

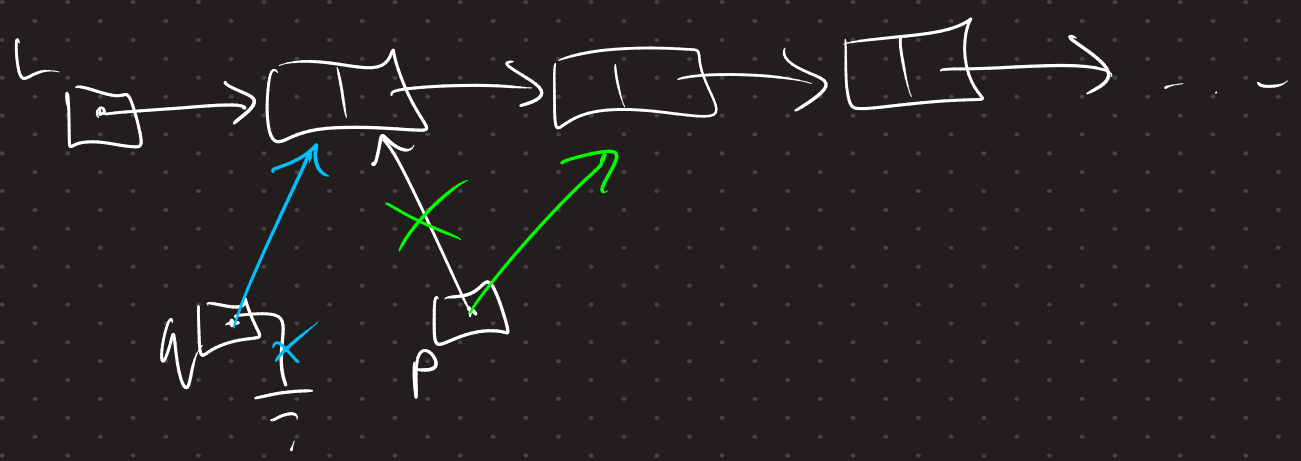


```
q = p;
p = p->next;
```
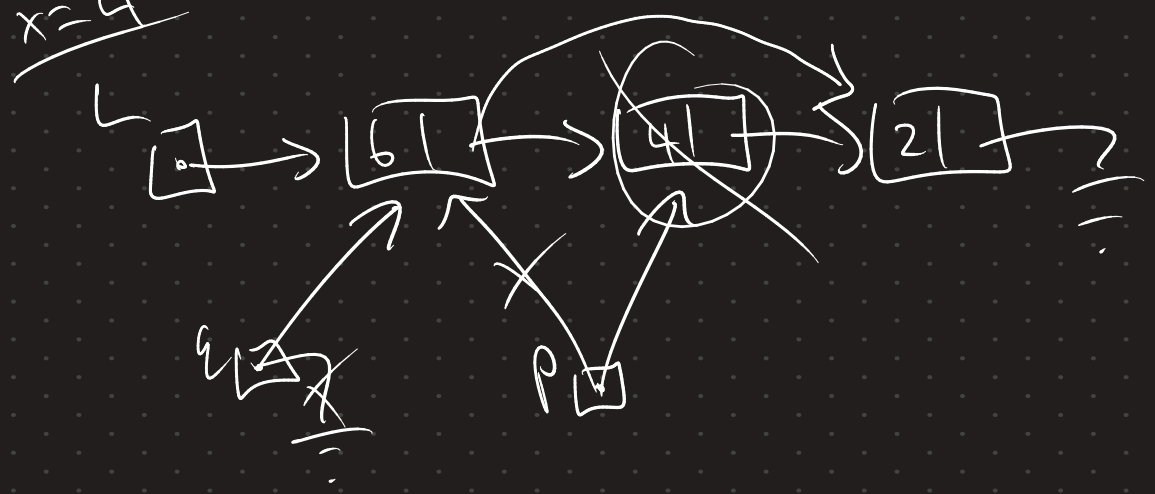
$x = 4$