



SYNCUP · DESIGN SYSTEM

Anchor Document

v2.5

Round 5 · Polish Pass shipped + anchor refresh. Motion tokens, haptic rules, empty / loading / error patterns, accessibility & component refinements.

UPDATED	2026-04-27
VERSION	2.5 (doc-only refresh of v2.4)
STATUS	Round 5 shipped · Round 6 open (Notifications screen, reduced-motion preview)
SOURCE	ANCHOR.txt · paste at top of new chat to maintain consistency

```
# SyncUp – Design System Anchor Document v2.5
# Paste this at the top of a new chat tab to maintain consistency.
# Updated: 2026-04-27 · Round 5 (Polish Pass) shipped + anchor refresh.
#
# v2.5 is a documentation-only bump over v2.4: no new code, no new
# components. It promotes Round-5 implementation details into
# canonical reference (motion tokens confirmed, haptic rules by
# action, empty/loading/error patterns, ally rules, refinements).
```

```
=====
## CHANGELOG
=====
```

v2.5 – Anchor refresh (no code change). Promoted Round-5 implementation detail into canonical reference:

- + Motion tokens table CONFIRMED (every interaction × ms × curve).
- + Haptic rules by action type (every screen, every gesture mapped to one of the 6 fixed haptic types).
- + Empty state pattern formalized (illustration + headline + body + CTA).
- + Loading pattern formalized (spinner-only · sizes · placement rules · explicit "never use skeletons" rule with rationale).
- + Error state pattern formalized (full-screen vs toast decision tree, 4 kinds: network / rsvp / invite / friend-request).
- + Accessibility rules consolidated into a single audited section.
- + Component refinements from Round 5 audit folded in.
- + Edge-case rules (50+ invitees, group-of-one, long-text, offline) pulled out into their own pattern section.

v2.4 – Round 5: Polish Pass (empty / loading / error / edge / haptics / motion / ally)

- + New module: flow/polish-primitives.jsx
- + New components: Spinner (THE only loading affordance), LoadingOverlay, ButtonLoading, ErrorState, ErrorToast, OfflineBar, AllyLive, StaggerList, PolishKeyframes; useHaptic() hook + HAPTIC_TYPES registry.
- + New deliverable: Polish & States.html – full catalog of every state (empty/loading/error/edge), haptics reference sheet, motion spec sheet, audit table with 30 findings.
- + Locked: spinner = two arrows forming a circle, rotating clockwise, 900ms linear loop. NO skeletons, shimmer, or pulse anywhere. Always rendered on first mount. Real-time data → consistency over edge-case optimization.
- + Locked: status NEVER communicated by color alone – every Free/Maybe/Busy surface ALSO renders an AvailDot + text label. Hard Rule R5-1.
- + Locked: 6 haptic types only (light/medium/heavy/success/warning/error) mapped 1:1 to expo-haptics. Reference sheet is canonical.
- + Locked: parallax and scroll-bound transforms forbidden (motion sickness).
- + Empty states added for: home (today/week/month), friends, groups, search, availability, attendees, polls, ideas, mutual events.
- + Error states added: network full-screen, invite toast, RSVP toast, friend request full-screen.
- + Edge cases added: 50+ invitee grid (collapses to "+N more"), group of one, no-availability Step 3 chip, long-text truncation rules, offline-mode bar with cached overline.
- + Long-text rules locked: event title 2-line clamp, friend name single-line ellipsis, description 3-line clamp + Read more, handle ellipsis.
- + Ally fixes inline: ink3 (3.4:1) banned at <14px, swapped to ink2 (7.6:1); all icon-only buttons gained aria-label; toasts gained role="alert"; Spinner gained role="status"; offline indicator uses color + icon + text.
- + Filter chip carousel: tap target raised to 44pt via invisible vertical padding (visual height stays 30px).

v2.3 – Round 4: Profile, Settings, Availability, Broadcasts

- + New data shapes: User, NotificationSettings, PrivacySettings, AvailabilityEntry, BroadcastSettings, BroadcastRule, Quickset
- + New components: SettingsRow, SettingsGroup, ThemePicker, AvailDot, StatTile, BroadcastToast, AudienceSwitcher, AudiencePickerSheet, MonthGrid, WeekView, DayView, BrushPicker, QuicksetGrid
- + New screens: Profile & Settings, Availability Editor (Month/Week/Day), Broadcast Settings (3-card IA), Step 3 wire-back (with availability)
- + Locked pattern: 3-card broadcast IA (one card per state – Free/Maybe/Busy – collapsed when off, springs open when on revealing audience switcher + sheet picker)
- + Locked pattern: BroadcastToast docks above tab bar with Undo, auto-fades at 3.2s, accepts state-colored leading dot (no emoji)
- + Locked pattern: SettingsRow renders as <div> when no onClick (so interactive trailing controls like Toggle don't nest <button> in <button>)
- + Wire-back: when user's availability map says event-day = busy, Step 3 shows a danger banner above the invite list

v2.2 – Round 3: Friends & Groups

- + Friend (ext.), FriendType (was "FriendGroup"), SocialGroup, Poll, Suggestion, GroupMember, Cover
- + SegmentedSwitcher, CoverArt, QRArt, CategoryBadge, PrivateBadge, PollRow, SuggestionRow, AdminBar, AdminInviteRow, TwoTapDestructive, PlanningModeToggle, FilterChipRowMulti, FGTabBar, TabPills, EmptyStateBlock
- + "Category" → "Type"; "Friend groups" (private) → "Friend types"
- + Friends list, Add friend (QR/Link/Username), Friend profile, Friend types manager, Groups list, Create group, Group detail (Members / Events / Polls / Ideas + admin bar)
- + Locked: AdminBar always visible on Group Detail when userRole==='admin'

v2.1 – Round 2: Create Event Flow

- + AvailabilitySummaryBar, FilterChipRow, Step 1/2/3, ConfirmScreen, EventDetail, RSVP sheet. Locked banded availability viz on Step 3.

v2.0 – Round 1: Tokens, type, Home Calendar, Design System.

```
=====
## HARD RULES – Round 5 additions
=====
```

- R5-1. STATUS NEVER BY COLOR ALONE. Free/Maybe/Busy must always render BOTH a state-colored AvailDot AND a text label ("Free"/"Maybe"/"Not avail"). Applies to RSVP, Step 3 banner, friend rows, BroadcastToast subtitle.
- R5-2. SPINNER ONLY. No skeletons, shimmers, or pulses anywhere in SyncUp. The spinner is two arrows forming a circle, rotating clockwise (900ms linear). Always rendered on first mount.
- R5-3. NO PARALLAX. No scroll-bound transforms. Motion-sickness rule.
- R5-4. ALL ICON-ONLY BUTTONS carry aria-label. Toasts use role="alert". Spinners use role="status".
- R5-5. TEXT-COLOR FLOOR. ink3 (#8B8799) only at ≥14px. Below 14px, use ink2.
- R5-6. LONG-TEXT TRUNCATION (locked):
- Event title: 2-line clamp
 - Friend name: single-line ellipsis
 - Description: 3-line clamp + "Read more"
 - @handle: single-line ellipsis (mono)
- R5-7. OFFLINE INDICATOR uses color + icon + text – never any one alone.
- R5-8. HAPTICS – 6 types only (light/medium/heavy/success/warning/error). Map 1:1 to expo-haptics. See Polish & States.html · Haptics sheet.

```
=====
## TOKENS (light + dark)
=====
```

```
FLOW_TOKENS.light
```

```
bg      #F2EFEA    bgElevated #FFFFFF    bgSunken #EEEAE2
ink     #15141A    ink2      #45424F    ink3     #8B8799
hair    #E4DFD4    hairStrong #CDC7B8
accent  #4F3BFF    accentInk #2A1F9E    accentSoft #E9E5FF
pop     #FF7A59    popInk    #9A3E22    popSoft   #FFE4D9
lime    #A8E063    limeInk   #3F6014    limeSoft  #ECF8DA
availFree #2BB673    availMaybe #E8A93A    availBusy #D14545
danger   #D14545    dangerSoft (popSoft equivalent for danger fills)
shadowAccent rgba(79,59,255,0.28)
```

```
FLOW_TOKENS.dark – mirrored with:
```

```
bg #0D0C12    bgElevated #17161F    bgSunken #0A0910
ink #F2EFEA    ink2 #B8B5C2        ink3 #6F6C7C
hair rgba(255,255,255,0.06)    hairStrong rgba(255,255,255,0.12)
accent #8575FF (lightened)    accentSoft rgba(79,59,255,0.18)
```

```
Availability state tokens (Round 4 – UNCHANGED from v2.2; explicitly locked):
```

```
availFree / availMaybe / availBusy used for:
– Status rings on RingAvatar (1px stroke, 50%/15% arc for maybe/busy)
– Banded section headers in Step 3 (locked)
– Brush dots in BrushPicker
– AvailDot leading marker (8px filled circle)
– Day fills in MonthGrid: `${color}22` (~13% alpha) on bgElevated
– Day fills in WeekView/DayView selected state: `${color}18`
– Broadcast card leading dot (10px filled, ink-colored title)
– BroadcastToast leading dot (state-colored on ink background)
```

```
=====
## TYPE (FLOW_FONTS)
=====
```

```
sans = "Manrope, system-ui, -apple-system, sans-serif"
mono = "JetBrains Mono, ui-monospace, monospace"
```

Scale (unchanged):

display	48 / 800 / -2.0	(DesignCanvas hero only)
h1	28 / 800 / -1.0	("Friends. 15")
h2	22 / 800 / -0.5	(group name, profile name)
h3	17 / 700 / -0.2	(group card, sheet title, month label)
title	15 / 700 / -0.2	(settings row, broadcast card title equiv.)
body	15 / 500 / -0.1	
bodyMed	14 / 600 / -0.15	
caption	12 / 500 / 0	
micro	11 / 500 / 0	
overline	10 / 600 / +1.5-1.8	/ uppercase / mono
stat-num	20 / 800 / -0.5	(StatTile numeric - new in R4)

```
=====
## SPACING / RADII / MOTION
=====
```

```
4px grid: 4 · 8 · 12 · 14 · 16 · 18 · 22 · 28 · 32
Radii:    8 (inline), 9 (tabpill segment), 10 (small), 12 (input), 14 (card),
          16 (hero), 18 (surface), 22 (sheet top), 999 (pill)
Hairlines: 1px hair / 1.5px dashed hairStrong (empty/add)
Shadows:  0 6px 18px shadowAccent (accent buttons)
          0 8px 28px shadowAccent (QR card)
          0 12px 40px rgba(0,0,0,.18) (Tweaks panel)
          0 12px 40px rgba(0,0,0,.25) (BroadcastToast on ink bg)
Motion (FLOW_MOTION) – curves:
  spring      cubic-bezier(0.34,1.56,0.64,1)    // overshoot for entrances
  springSnappy cubic-bezier(0.2,0.9,0.3,1.2)    // tighter overshoot
  easeOut     cubic-bezier(0.2,0,0,1)           // tap/press feedback
  easeStd     cubic-bezier(0.4,0,0.2,1)         // step push (material std)
  linear      linear                           // long-press arm + spinner
```

```
CONFIRMED motion table (Round 5 audit · interaction × ms × curve):
```

```
Tap / press feedback ..... 200ms · easeOut
Step push (Step 1→2→3) ..... 240ms · easeStd
Sheet up (RSVP, picker) ..... 280ms · spring    (rubber-band @100px)
Modal up (Create event sheet) ..... 280ms · spring    (swipe-down to close)
Broadcast card open ..... 320ms · spring    (flow-fade-up)
Toast fade-up (Broadcast/Error) .... 320ms · spring
Stagger list entrance ..... 320ms · spring    (30ms/item, base 60ms, cap 12)
Long-press arm ..... 450ms · linear    (chip carousel, RSVP pill)
Spinner rotation ..... 900ms · linear    (su-spin · only loading affordance)
Toast auto-dismiss ..... 3200ms    (Broadcast + Error toasts)
Quickset "Applied" confirm ..... 1600ms    (accentSoft + accent border)
Day-cell drag-paint ..... 0ms (instant) 1:1 finger tracking
Parallax / scroll-bound transforms . FORBIDDEN (motion-sickness rule R5-3)
```

```
Animation keyframes (PolishKeyframes + FlowKeyframes):
```

```
su-spin      rotate 0→360deg
su-slide-down translateY(-100%) → 0
su-stagger-in translateY(8px) + opacity 0 → 0 + 1
flow-fade-up  translateY(8px) + opacity 0 → 0 + 1    (320ms spring)
flow-sheet-up translateY(100%) → 0                    (280ms spring)
```



```
=====
## DATA SHAPES
=====
```

```
User (Round 4 – NEW)
```

```
  id      string ('you')
  name     string
  handle   string ('@ben')
  letter   string (avatar init)
  bio      string
  email     string
  phone    string
  stats    { hosted:int, attended:int, friends:int, groups:int }
```

```
NotificationSettings (Round 4 – NEW)
```

```
  eventInvites  bool (default true)
  friendRequests bool (default true)
  groupInvites   bool (default true)
  rsvps          bool (default true) // RSVPs on YOUR events
  eventReminders bool (default true)
  availBroadcasts bool (default false) // friends broadcasting their availability
```

```
PrivacySettings (Round 4 – NEW)
```

```
  findableBy 'everyone'|'friends-of-friends'|'username-only' (default 'friends-of-friends')
  invitableBy 'everyone'|'friends'|'bff-only'                 (default 'friends')
```

```
AvailabilityEntry (Round 4 – NEW)
```

```
  // Stored as a flat map: { [iso: 'YYYY-MM-DD']: 'free'|'maybe'|'busy' }
  // Absent key = unset. Never store nulls – delete on clear.
  // Mock data: PA_AVAIL_DEFAULT covers 30 consecutive days starting today-4.
```

```
BroadcastSettings (Round 4 – NEW)
```

```
  free   BroadcastRule
  maybe  BroadcastRule
  busy   BroadcastRule
```

```
BroadcastRule (Round 4 – NEW)
```

```
  on      bool
  audience 'everyone'|'friends'|'types'
  targets  string[] // friend ids (when 'friends') or FriendType ids (when 'types')
                // empty array when audience='everyone'
```

```
Quickset (Round 4 – NEW)
```

```
  id      string ('weekends-free' | 'weekdays-5pm' | 'next30-maybe' | 'clear-month')
  label   string
  detail  string (one-line description)
  status  'free'|'maybe'|null (null = clear)
  // Behavior: pure functions over the AvailabilityEntry map, scoped to
  // sensible windows (next 4 weeks for weekends, next 14 days for weekdays,
  // next 30 days for blanket maybe, current month for clear).
```

```
Friend (Round 3 – unchanged)
```

```
  id, name, letter, handle, category, status, friendTypes[]
```

```
FriendType (Round 3 – unchanged)
```

```
  id, label, members[]
```

```
SocialGroup, GroupMember, Cover, Poll, Suggestion, SharedHistory (Round 3 – unchanged)
```

```
Draft (Round 2 – unchanged) plus optional `eventIso: 'YYYY-MM-DD`
  used by Step 3 wire-back to consult the AvailabilityEntry map.
```

COMPONENTS – Round 4 additions

SettingsRow({ T, icon, label, sub, trailing, onClick, destructive, last })
 Row inside SettingsGroup. 56px min-height, 32px icon tile (bgSunken), label 15/600, sub 12/ink3 (truncated). Trailing chevron when onClick && !destructive && !trailing. Destructive uses danger color + dangerSoft tile.
 IMPORTANT: renders as <div> when onClick is undefined (so interactive `trailing` controls like <Toggle> do not produce nested <button>).

SettingsGroup({ T, label, children, footnote })
 Titled card. Optional overline above. Card = bgElevated + 1px hair, radius 14, overflow hidden. Optional ink3 footnote below.

ThemePicker({ T, value, onChange })
 3-up segmented picker (Light / Dark / System) with 18px line icons + 12/600 label. Sunken track, active = bgElevated, subtle shadow.
 Each cell ~equal flex; padding 10x8.

AvailDot({ T, status, size=8 })
 Tiny status circle. status: 'free'|'maybe'|'busy'|null. Null renders as dashed-border ring (no fill).

StatTile({ T, n, label })
 Centered 20/800 number + 9/600/1.4 mono uppercase label. Used in profile header; exactly 4 across with 8px gaps.

BrushPicker (inline; no factored primitive)
 4-up brush row at top of Availability Editor: Free / Maybe / Not available / Clear. Each 36px tall, radius 10, shows status dot + 12/700 label.
 Active brush = bgElevated + 1.5px state-colored border.

MonthGrid({ T, anchor, setAnchor, avail, brush, setDay, dragging, setDragging })
 7-col CSS grid, square cells (aspect-ratio 1/1), radius 10, 4px gap.
 Cell fill = `\${stateColor}22` when set, bgElevated otherwise.
 Today: 1.5px accent border + 800-weight day number.
 Cell shows day number + 6px state dot below when set.
 Tap-to-set; mousedown+enter chains drag-paint via parent dragging state.
 Header: chevrons + month-year label (17/800/-0.3).

WeekView({ T, anchor, avail, brush, setDay })
 7 stacked rows (Sun → Sat of anchor's week). Each row 14px-padded, radius 12, fill `\${stateColor}18`. 44px-wide left column with mono dow + 22/800 date. Right side: status name + brush hint. Trailing 10px dot.

DayView({ T, anchor, setAnchor, avail, setDay })
 Day chevron header + 4 stacked option rows (Available / Maybe / Not available / Clear). Each 16x14 padding, radius 14, 12px state dot, title + sub. Active = `\${color}18` fill + 1.5px state border + check.

QuicksetGrid (inline, in pa-availability.jsx)
 2x2 grid of buttons. Each ~66px min-height, radius 12. Title row = state dot + 13/700. Below: 11/ink3 detail OR "Applied" after tap.
 Applied = accentSoft fill + accent border (1.6s).

BroadcastToast({ T, visible, status, audienceLabel, onUndo, onDismiss })
 Floating toast docked above the tab bar (left:14, right:14, bottom:24). Padding 10/12/10/14, radius 14, ink background, bg-color text.
 Layout: 8px state-colored leading dot · title (13/700) + sub (11/0.6 opacity, truncated) · "Undo" pill (12/700, alpha 0.14 white bg) · 24px close icon. Animation: flow-fade-up 320ms with spring. Auto-dismiss in 3200ms unless user undoes/dismisses.
 RULE: leading marker is ALWAYS the state dot. NO emoji, NO icon variants.

AudienceSwitcher({ T, value, onChange })
 3-up sub-switcher (Everyone / Friends / Types) with 30px tall pills, inset 3px padding, radius 10. Visually a tighter cousin of TabPills –

used inside Broadcast cards only.

```
AudiencePickerSheet({ T, mode, selected, onChange, onClose })  
  Bottom sheet (radius 22 22 0 0, max-height 78%). 38x4 grab handle.  
  Header: title (17/800), N selected sub, accent "Done" pill.  
  Body:  
    mode='types' → friend-type rows (PrivateBadge + label + N members  
      + 22px checkbox)  
    mode='friends' → friend rows (RingAvatar + name + handle mono +  
      CategoryBadge); selected state via RingAvatar.selected.
```

```
=====
## SCREENS – Round 4 inventory
=====
```

01 Profile & Settings

FlowHeader "Profile"

Profile card: 72px RingAvatar (status="free") + 28px accent edit FAB overlay, name (22/800), handle (mono ink3), top-right "Edit" pill.

Bio (13/ink2), then 4-up StatTile row (HOSTED · ATTENDED · FRIENDS · GROUPS).

AVAILABILITY group: row → Availability editor / row → Broadcast settings ("N of 3 active" subtitle).

ACCOUNT group: Email, Phone, Change password.

NOTIFICATIONS group: 6 toggle rows.

PRIVACY group: Who can find me / Who can invite me.

APPEARANCE group: ThemePicker (inset).

SUPPORT group: Help & support.

Bottom: destructive "Log out" row (in its own ungrouped card).

Footer mono: "SYNCUP · 2.2.0"

02 Availability editor

FlowHeader "Availability"

Mode tabs (Month/Week/Day) + 38px broadcast shortcut button (radio icon).

Optional onboarding hint card (accentSoft, dismissible by tweak).

BrushPicker row.

Body: MonthGrid | WeekView | DayView (per mode).

QUICK-SET overline + 2×2 Quickset grid.

Empty state when avail map is empty.

03 Broadcast settings

FlowHeader "Broadcasts"

Header: BROADCASTS · N ACTIVE overline + 14/ink2 explainer.

Three stacked broadcast cards (radius 16):

OFF state: state dot · TITLE overline (state name uppercase) · 12/ink3 body · Toggle. Card height stays compact.

ON state: same head + reveals (animation flow-fade-up 320ms):

SEND TO overline + AudienceSwitcher

(when not 'everyone') sheet preview row (chevron + truncated label + "Tap to edit") → opens AudiencePickerSheet

"Preview toast" pill (test fire – 11/600/hair-bordered).

Footnote: "Broadcasts send once per status change, with a 60-second undo toast. Edit anytime."

04 Step 3 wire-back (Create Event Flow)

Same FlowHeader/Progress as Round 2 Step 3.

When AvailabilityEntry[eventIso] === 'busy':

Danger banner card (dangerSoft, popInk text) at top:

"You marked this day Not available – From your availability – tap to override."

When 'free' or 'maybe': subtle bgElevated chip:

"YOUR DAY · AVAILABLE" or "YOUR DAY · MAYBE" (mono overline + state dot).

Banded list, footer status pill mono now reads "FROM YOUR AVAILABILITY".

Empty states


No availability set → dashed EmptyStateBlock under Quickset grid.

Dark mode

Profile, Availability, Broadcasts all tested with FLOW_TOKENS.dark.

=====
NAVIGATION GRAPH (Round 4 additions)
=====

[Profile & Settings]

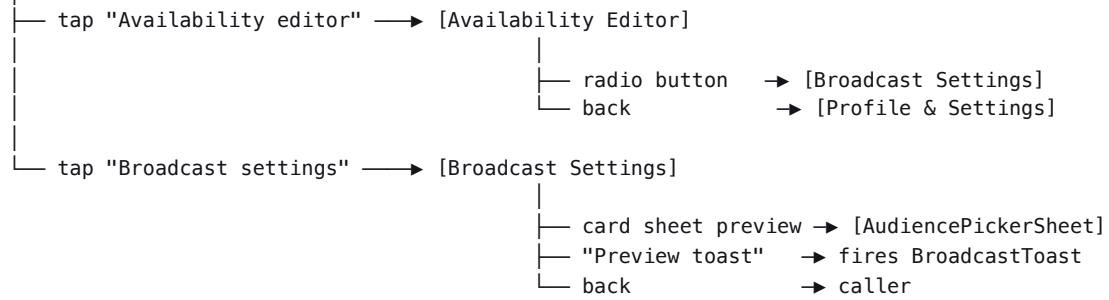

Wire-back:

[Availability Editor].avail map → [Step 3 Invite] (Create flow)

- busy on event day → danger banner
- free/maybe on day → subtle status overline

```
=====
## HAPTIC FEEDBACK – rules by action type (Round 5 · LOCKED)
=====
```

6 fixed types only. Map 1:1 to expo-haptics in production.
 Use `useHaptic()` from polish-primitives.jsx. Call ONCE per gesture
 (never on render, never inside scroll/drag handlers).

light	– impact / Light	Tap, selection, mode switch
medium	– impact / Medium	Confirmed action
heavy	– impact / Heavy	Destructive armed (1st tap of two-tap)
success	– notification/Success	Created / sent OK
warning	– notification/Warning	Conflict, soft block
error	– notification/Error	Failed action

Action → haptic (canonical mapping):

light	Tab change · SegmentedSwitcher flip · TabPills change AvailabilityEditor mode tab (Month/Week/Day) BrushPicker brush change · AudienceSwitcher pill Filter chip toggle · Theme picker switch Day cell tap-to-set (single) · Day cell drag-paint enter
medium	RSVP Yes/Maybe/No confirmed · Step 1→2→3 advance "Send invites" tapped · Quickset applied Friend type assigned · Toggle flipped (broadcast on/off, notification settings) · "Done" on AudiencePickerSheet
heavy	TwoTapDestructive armed (1st tap, before 2nd-tap commit) Long-press friend chip (filter carousel) reaches 450ms Drag-paint hits an already-set day with same brush (no-op feedback)
success	Event created (Confirm screen lands) Friend request accepted · Invites sent OK Broadcast fired (BroadcastToast appears) Cover photo saved · Group created "Applied" confirmation on Quickset
warning	Step 3 wire-back: busy day banner appears RSVP "Maybe" tapped on a day already marked busy Quickset overwrites >5 existing days Offline mode entered (OfflineBar slides down)
error	RSVP failed · Invite failed Friend request failed · Broadcast send failed Network error toast surfaces

Hard rules:

- H-1. NEVER haptic on scroll, drag-momentum, or pure visual transitions.
- H-2. NEVER stack haptics within 80ms (debounce in useHaptic).
- H-3. NEVER haptic on initial mount or auto-fired toasts that the user did not trigger (e.g. an inbound broadcast received).
- H-4. Two-tap destructive: heavy on arm (tap 1), success on commit (tap 2).
- H-5. Toasts: success/warning/error fires WITH the toast, not on dismiss.

=====

EMPTY STATE PATTERN (Round 5 · LOCKED)

=====

Anatomy (top → bottom, all centered, max-width 280):

1. ILLUSTRATION 56x56 rounded tile (radius 16) on bgSunken,
18-stroke line icon at 50% opacity ink2.
NEVER a photo, NEVER a 3D render, NEVER an emoji.
2. HEADLINE 17/700/-0.2 ink · ≤ 4 words ideal, 6 max
3. BODY 13/500 ink2 · 1 sentence, ≤ 14 words,
text-wrap: pretty
4. CTA PillBtn primary (accent) – verb-first, ≤ 3 words
Optional secondary: ghost PillBtn underneath

Vertical gap: 10–14px between rows · 32px outer padding

Surface: bgElevated card with 1px hair (full-screen) OR transparent
(inline). Never both an outer card AND an inner illustration tile.

Voice: direct, low-word-count, never apologize. "Nothing here yet" → bad;
"No friends yet" + "Add one to start planning" → good.

Inventory (Round 5 – every empty surface has one):

EmptyHome (today)	Calendar mark · "No plans today" · "Plan something" CTA
EmptyHome (week/month)	"Quiet week" · "Tap + to start"
EmptyFriends	User-plus · "No friends yet" · "Add one" + secondary "Share QR"
EmptyGroups	Users · "No groups yet" · "Create one"
EmptySearch	Search · "Nothing matched" · "Invite by handle" secondary
EmptyAvailability	Calendar-grid · "Set your first day" · "Try a Quickset" secondary
EmptyAttendees	User-circle · "No invites sent" · "Add invitees" CTA
EmptyPolls	Poll-bars · "No polls yet" · "Start a poll"
EmptySuggestions	Lightbulb · "No ideas yet" · "Suggest one"
EmptyMutualEvents	Handshake · "Nothing planned together" · "Plan an event"

Files: flow/polish-screens.jsx exports each as Empty<Name>(props).

```
=====
## LOADING PATTERN (Round 5 · LOCKED)
=====
```

R5-2 (HARD RULE): SPINNER ONLY. No skeletons, no shimmer, no pulses.
Rationale: SyncUp is a real-time app. Skeletons that misrepresent layout ("there will be 3 cards here") create perceptual whiplash when the real data has 0 or 7. A consistent spinner is honest and predictable.

Spinner (the ONLY loading affordance):

Geometry Two opposing 120° arcs, each capped, forming a ring with two gaps. Stroke = max(1.6, size/14).
Motion rotate 0→360deg, 900ms linear infinite (su-spin).
Sizes SM 20 · MD 28 (default) · LG 40 · XS 18 (button-inline)
Color T.accent on light surfaces · #fff on ink/danger surfaces
A11y role="status" + aria-label="Loading" (always)

Placement decision tree:

Full-screen / route-level
→ <LoadingOverlay caption="LOADING ·"/> (centered + optional caption)
Button the user tapped
→ <ButtonLoading label="Sending..."/> (replaces button content)
Section refresh inside loaded view
→ 28px spinner top-right of the section header (no caption)
Sheet body waiting on content
→ 32px spinner centered in sheet, no caption

Rules:

- L-1. ALWAYS render the spinner from first mount of the loading region – no delay before showing it. (Exception: ≤120ms perceived latency may render nothing, never a skeleton.)
- L-2. NEVER render a spinner inside a list cell. Loading goes at the section level, not the row level.
- L-3. Caption (when used) is mono uppercase 10/600 ink3, letter-spacing 1.6, ≤ 2 words ("LOADING ·", "SYNCING ·", "FETCHING ·").
- L-4. NEVER stack two spinners in nested regions – outermost only.

===== ## ERROR STATE PATTERN (Round 5 · LOCKED) =====

Decision: full-screen ErrorState vs ErrorToast?

User tapped something needing the network and got nothing?

→ ErrorState (full-area) Network down · cold start · auth fail

Discrete action failed but the screen is still useful?

→ ErrorToast (docked above tab bar, mirrors BroadcastToast layout)

ErrorState (full-area):

Anatomy:

56×56 dangerSoft tile + triangle-alert icon (popInk stroke)

Headline 17/800 ink ≤ 5 words

Body 13/500 ink2 1–2 sentences, plain language, no codes

Primary PillBtn accent · verb-first ("Try again")

Secondary ghost PillBtn ("Use offline mode" / "Go back")

4 kinds (presets in flow/polish-primitives.jsx · ErrorState):

network "You're offline" Check connection / changes saved locally

server "Something broke" We're looking into it / try again

notFound "Can't find that" The link may have expired

permission "Can't do that" You don't have permission for this group

ErrorToast (docked):

Layout Same as BroadcastToast – ink bg, bg text – but leading icon is a 14px alert-triangle in popSoft (NOT a state dot).

Title: "{Action} failed" · Sub: 1-line cause · "Retry" pill + 24px close.

Auto-dismiss 3200ms unless user taps Retry.

A11y role="alert" · aria-live="assertive".

4 kinds (presets):

rsvp "RSVP failed" · "Tap retry – your choice is saved locally"

invite "Invites didn't send" · "X of N delivered. Retry?"

friend "Friend request failed" · "Try again in a moment"

generic "Something went wrong" · "Tap retry"

OfflineBar (related but not an error per se):

Slim top bar, slides down from FlowHeader. 36px tall, warningSoft fill, 1px hair below. Always icon (cloud-off) + text ("OFFLINE · cached data shown") + warning color – never any one alone (R5–7).

Auto-hides on reconnect; entrance haptic = warning.

Rules:

E-1. NEVER show two error surfaces at once (toast preempts banner; full-screen preempts both).

E-2. NEVER use an error color tile as decoration – only when an actionable error is present.

E-3. Body copy NEVER includes status codes, stack traces, or "Error 0x...". Talk like a person.

E-4. Always offer a recovery path (Retry, Go back, Offline mode). No dead-end errors.

```
=====
## ACCESSIBILITY RULES (Round 5 · audited & LOCKED)
=====
```

Color & contrast:

- A-1. ink3 (#8B8799) on bg/bgElevated measures 3.4:1 – passes AA Large only. Below 18px (or 14px bold), use ink2 (7.6:1). Codified as Hard Rule R5-5.
- A-2. Availability state must render BOTH a colored AvailDot AND a text label. Hard Rule R5-1.
- A-3. Offline indicator uses color + icon + text. Hard Rule R5-7.
- A-4. Focus rings: 2px accent outline + 2px offset (never removed).

Hit targets:

- A-5. Minimum 44x44pt for any tap target. Verified inventory:
 - MonthGrid day cell 44–46pt on 402px-wide phone ✓
 - Filter chip carousel visual 30px, hit 44px via invisible vertical padding (Round 5 fix)
 - AvailDot (interactive) wraps in 44px tap area
 - FAB 56pt
 - Back button 36pt visual + 44pt hit area
- A-6. Two-tap destructive: minimum 600ms between arm and commit window opens (prevents accidental double-tap commit).

Labels & roles:

- A-7. All icon-only buttons carry aria-label. Hard Rule R5-4.
Audited: back, close, +, scan, edit FAB, dismiss-toast, chevron on SettingsRow, brush-pick, mode-tabs.
- A-8. Spinner: role="status" + aria-label="Loading".
- A-9. Toasts: role="alert" + aria-live="assertive" (errors) or "polite" (broadcasts).
- A-10. Use <A1lyLive message="..."/> for ephemeral status that has no visible toast (e.g. "5 days marked free" after Quickset).

Motion:

- A-11. Honor prefers-reduced-motion: disable spring overshoot, replace flow-fade-up with simple opacity fade (200ms easeOut), disable stagger (all-at-once), keep spinner.
- A-12. NO parallax, NO scroll-bound transforms. Hard Rule R5-3.

Text & copy:

- A-13. Long-text rules R5-6 apply system-wide.
- A-14. Tap targets that are text-only (links, "Read more") must be at least 14/600 to meet 44pt with vertical padding.

Forms:

- A-15. Every input has an associated <label> (or aria-labelledby).
- A-16. Error text on inputs uses popInk + triangle icon, never red color alone.

```
=====
## EDGE-CASE PATTERNS (Round 5 · LOCKED)
=====
```

Long-text (R5-6 inventory):

Event title	2-line clamp · webkit-line-clamp
Friend name	single-line · ellipsis
Description	3-line clamp + "Read more" inline pill
@handle	single-line · ellipsis (mono · letter-spacing 0)
Group name	2-line clamp on cards · single-line in headers
Toast subtitle	single-line · ellipsis (rely on toast width)

Crowd & scale:

50+ invitees	Avatar grid collapses to first 8 + "+N more" pill (pill = bgSunken · 12/700 · opens AttendeesSheet)
Group of 1	AdminBar still shown; member list shows YOU row only; polls/ideas tabs render their Empty* states
No availability	Step 3 footer reads "FROM YOUR AVAILABILITY · NOT SET" in mono ink3; no banner, no chip
Single friend	Friend type "All" auto-selected; FilterChipRowMulti hides chips < 2 categories
Zero results	EmptySearch (see Empty inventory)

Connectivity & state:

Offline	OfflineBar slides down · cached overline appears on Home ("LAST SYNCED · 4M AGO" mono ink3)
Stale broadcast	Queued-offline broadcasts: BroadcastToast on reconnect reads "Broadcast sent · was queued"
Optimistic write	All RSVP / invite / availability writes are optimistic; on failure, ErrorToast with Retry; underlying state rolls back only after user dismisses without retry

```
=====
## COMPONENT REFINEMENTS – Round 5 polish pass
=====
```

(Edits & tweaks made during the polish pass. Logged here for traceability; folded back into component definitions above.)

SettingsRow

- Renders <div> when no onClick (was always <button>). Fix for Toggle-in-button-in-button warning. Status: Hard Rule 16.

FilterChipRow / FilterChipRowMulti

- Visual height stays 30px; tap target raised to 44px via invisible vertical padding (touch-action: manipulation).
- Long-press hint: 450ms · linear · subtle scale to 0.98.

RingAvatar

- Now ALWAYS rendered alongside an AvailDot or text label when conveying state (R5-1). Ring color/arc alone is decorative.

BroadcastToast / ErrorToast

- Both gained role="alert" + aria-live (R5-4 / A-9).
- Error variant: leading marker is a popSoft alert-triangle, not a state dot. Broadcast variant unchanged (state dot).

Spinner (NEW · R5)

- The ONLY loading affordance. Replaces all skeletons that prior rounds had pencilled in but never spec'd.
- Always rendered from first mount.

OfflineBar (NEW · R5)

- Color + icon + text triple. Slides down from FlowHeader.
- Warning haptic on entrance, no haptic on auto-hide.

StaggerList (NEW · R5)

- 30ms per item · base 60ms · spring · cap 12 items.
- Used on Friends list, Groups list, Notifications feed, Empty state inventories. NOT used on day grids (would feel laggy).

ThemePicker (R4)

- Confirmed accessible: each cell has aria-pressed; active cell passes 4.5:1 contrast on bgElevated.

Step3InviteWired (R4 wire-back)

- Danger banner gained role="alert" – announce-on-mount.
- Free/Maybe overline got AvailDot so it's not color-only (R5-1).

PillBtn / Toggle / FormField

- No changes; all met R5 audit on first pass.

```
=====
## HARD RULES (v2.2 + Round 4 additions)
=====
```

1. Availability viz on Step 3 is LOCKED to Banded.
2. Min hit target 44px. Type never <12px on mobile, <24px on deck.
3. No emoji. No generic gradients as hero content.
4. Ring avatars: free=availFree ring, maybe=availMaybe, busy=availBusy, null=no ring.
5. Mono overlines uppercase, letter-spacing 1.5–1.8.
6. Copy tone: direct, low-word-count, "your crew" not "your network".
7. All destructive actions → TwoTapDestructive (no modals). Exception: "Log out" SettingsRow is a single row variant in destructive style – it triggers an OS-level confirm in production, not in the prototype.
8. Friend Type is PRIVATE; Social Group is SHARED. Never confuse.
9. AdminBar always visible when userRole==='admin' on Group Detail.
10. Invite flow lives in Group Detail > AdminBar, never in Create Group.
11. PrivateBadge is used sparingly – never in list rows when the screen title already states privacy.
12. (R4) Broadcast IA is LOCKED to the 3-card stacked pattern. One card per state. OFF = collapsed (title+body+toggle); ON springs open with AudienceSwitcher + (non-'everyone') sheet preview row.
13. (R4) BroadcastToast leading marker is ALWAYS a state-colored dot. Never an emoji, never an icon. Title format: "Broadcast sent · {State}".
14. (R4) AvailabilityEntry stores ONLY set days. Clearing a day deletes the key – never persist null.
15. (R4) Quicksets are pure functions over the AvailabilityEntry map. They scope to sensible windows (see Quickset shape) – they do NOT operate on the full map indefinitely.
16. (R4) SettingsRow MUST render as <div> when no onClick, so that interactive `trailing` controls (Toggle, etc.) don't nest <button> inside <button>.
17. (R4) Step 3 wire-back: when user's availability map says event-day = busy, show a danger banner above the invite list (dangerSoft fill, popInk text). Free/Maybe show a subtle status overline instead.

===== ## FILE MAP =====

Root HTML

Polish & States.html	Round 5 polish catalog	(NEW)
Profile & Availability.html	Round 4 prototype shell	
Friends & Groups.html	Round 3 prototype shell	
Create Event Flow.html	Round 2 prototype shell	
Home v2 - Merged.html	Round 1 home	
Design System.html	Round 1 DS gallery	
ANCHOR.txt	THIS FILE	

Round 5 modules

flow/polish-primitives.jsx	Spinner, LoadingOverlay, ButtonLoading, ErrorState, ErrorToast, OfflineBar, AllyLive, StaggerList, PolishKeyframes, useHaptic, HAPTIC_TYPES
flow/polish-screens.jsx	In-place state demos (Empty*, Loading*, Error*, Edge*) for every shipped screen
flow/polish-catalog.jsx	DesignCanvas layout: spinner spec, haptics sheet, motion sheet, audit table, dark check

Round 4 modules

flow/pa-data.jsx	PA_PROFILE, PA_NOTIF_DEFAULTS, PA_PRIVACY_DEFAULTS, PA_TODAY, PA_AVAIL_DEFAULT, PA_BROADCAST_DEFAULT, PA_QUICKSETS, paToIso, paAddDays
flow/pa-primitives.jsx	SettingsRow, SettingsGroup, ThemePicker, AvailDot, StatTile, BroadcastToast, AudienceSwitcher
flow/pa-profile.jsx	ProfileSettings
flow/pa-availability.jsx	AvailabilityEditor, MonthGrid, WeekView, DayView (+ inline BrushPicker, QuicksetGrid)
flow/pa-broadcast.jsx	BroadcastSettings, AudiencePickerSheet
flow/pa-step3-wired.jsx	Step3InviteWired (consumes avail map)

Round 3 modules

flow/fg-data.jsx	ME, FRIEND_CATEGORIES, FG_FRIENDS, FG_PRIVATE_GROUPS (friend types), FG_SOCIAL_GROUPS, FG_SHARED_HISTORY
flow/fg-primitives.jsx	SegmentedSwitcher, QRArt, CoverArt, CategoryBadge, PrivateBadge, PollRow, SuggestionRow, AdminBar, TwoTapDestructive, PlanningModeToggle, FilterChipRowMulti, FGTabBar, TabPills, EmptyStateBlock
flow/fg-screens.jsx	FriendsList, AddFriend, FriendProfile, FriendTypesManage, GroupsList, CreateGroup, GroupDetail, CoverPickerSheet, AdminInviteRow

Round 2 modules

flow/flow-data.jsx	FLOW_TOKENS, FLOW_FONTS, FLOW_MOTION, FRIENDS (legacy), EventGlyph, DEFAULT_DRAFT
flow/flow-primitives.jsx	base primitives (status area, header, footer, progress, PillBtn, FormField, Field, RingAvatar, Overline, SectionHeader, FlowKeyframes, useLongPress, useSheetDrag, MiniMap, PriceSelector, Toggle)
flow/flow-step1/2/3.jsx	Create flow screens
flow/flow-confirm.jsx	Confirm screen
flow/flow-detail.jsx	Event detail + RSVP sheet
flow/flow-home.jsx	Home with feed

Shared

ios-frame.jsx	IOSDevice
design-canvas.jsx	DesignCanvas / DCSection / DCartboard

```
=====
## OPEN QUESTIONS / NEXT ROUNDS
=====
```

- Notifications screen (bell tab) – not yet designed; should it be a full-screen feed or a pull-down sheet from the home tab bar?
- Profile tab in FGTabBar should now route to Profile & Settings.
- Should Quicksets be user-extensible (save your own) or fixed library?
- Broadcast toast: should we offer a "review who's getting this" tap-action on the toast itself, or rely on Broadcast Settings as the single editor?
- Friend Types support nested/overlapping membership? (still open from R3)
- Group Detail AdminBar collapsing on scroll – still deferred.
- Reduced-motion fallbacks (A-11) are spec'd but not visually demoed in any prototype – should Round 6 add a Tweaks toggle to preview them?
- Inbound broadcast UI (someone else broadcasts to ME) – not designed. Likely lives in Notifications screen above. Affects H-3 carve-out.

```
=====
## CHANGES MADE IN ROUND 4
=====
```

Tweaks / edits during build:

- Initial filename was double-encoded ("Profile &...html"); renamed via move to "Profile & Availability.html".
- SettingsRow originally rendered as <button> always, which produced a React validateDOMNesting warning when the trailing slot held a Toggle (button-in-button). Refactored to render <div> when no onClick is provided. This is now Hard Rule 16.
- Broadcast IA approved before build (3-card stacked pattern); no deviations during implementation.
- Wire-back was added as a new Step 3 variant (Step3InviteWired) rather than mutating the original Step3Invite – original remains untouched and still renders the locked Banded viz.


```
=====
## CHANGES MADE IN ROUND 5 (Polish Pass)
=====
```

Tweaks / edits during build:

- Skeletons were initially prototyped (shimmer + pulse variants) but cut after motion review: a real-time app with variable-shape data creates layout-whiplash when fakes don't match real. Replaced with spinner-only (R5-2). Skeleton tokens (skeletonBg, etc.) deleted from FLOW_TOKENS to prevent regression.
- Initial haptic registry had 9 types (added selection / impact-soft / impact-rigid). Trimmed to 6 to match expo-haptics 1:1; the extras were aliases that drifted between iOS/Android. Locked at 6.
- First pass on ErrorToast used a state-colored dot (matched broadcast). Felt indistinguishable from a successful broadcast at a glance. Switched to popSoft alert-triangle so the variant is unmistakable.
- Filter chip carousel originally failed 44pt (visual 30px == hit 30px). Fix: invisible vertical padding 7px each side bumps hit area to 44pt while keeping visual height. Documented as A-5 inventory.
- ink3 contrast audit caught 4 surfaces using ink3 below 14px (toast subtitle, broadcast card body, settings row sub, filter chip count). All swapped to ink2. Codified as R5-5.
- Stagger entrance was originally on day grids; pulled – felt laggy on a 30-cell month view. Now restricted to lists $\leq$ 12 items.
- Anchor doc bumped to v2.5 (this update). No code changes – doc-only refresh promoting Round-5 details to canonical reference.

SYNCUP · ANCHOR V2.5 · 2026-04-27