


ReSIDS — two-tier detection: known attacks (k-of-n) + zero-day (protocol spec)

1 · Detection — two tiers

Tier 1 — attack specialists (supervised)







Tier 2 — zero-day detector (specification)

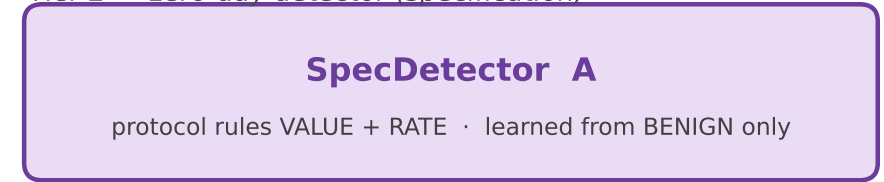


$TTL \in \{11000\} \cdot StNum/SqNum \text{ range} \cdot cbStatus \in \{0,1\} \cdot F55 \text{ rate}$

2 · Aggregation & scoring

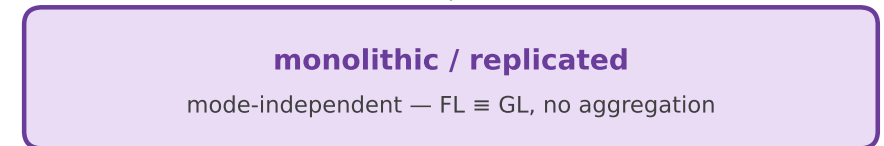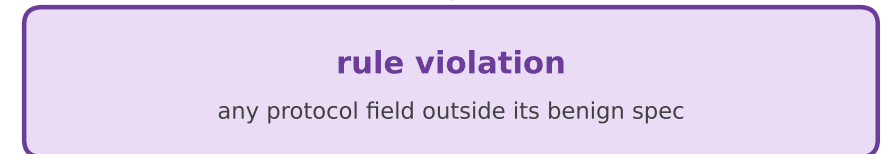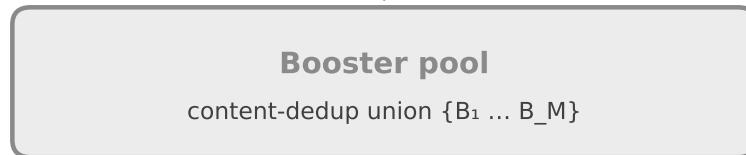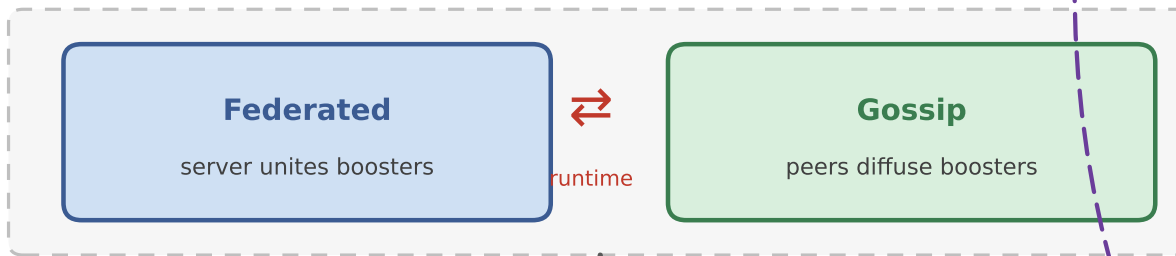

3 · Decision — two-tier

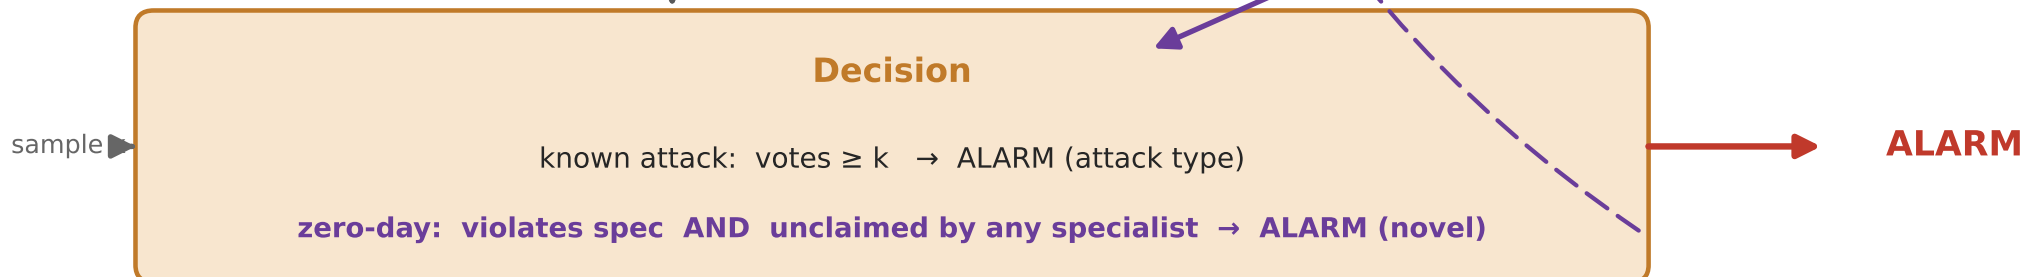

graduation (future): novel $\rightarrow$ operator labels $\rightarrow$ new specialist B_{N+1}

Tier 1 (supervised, known attacks; FL = GL under OR, runtime switch) + Tier 2 (specification, benign-only, monolithic/replicated $\rightarrow$ mode-independent).

Efficacy @ $\approx$ 0.57% FP: injection/high_StNum/poisoned 100%, random_replay 98%, inverse_replay 57% (partial), masquerade irreducible.