Landscape combination classes

184 recurrent fine-grained patterns grouped into 70 unordered parent-family signatures

2-family classes | 39 signatures

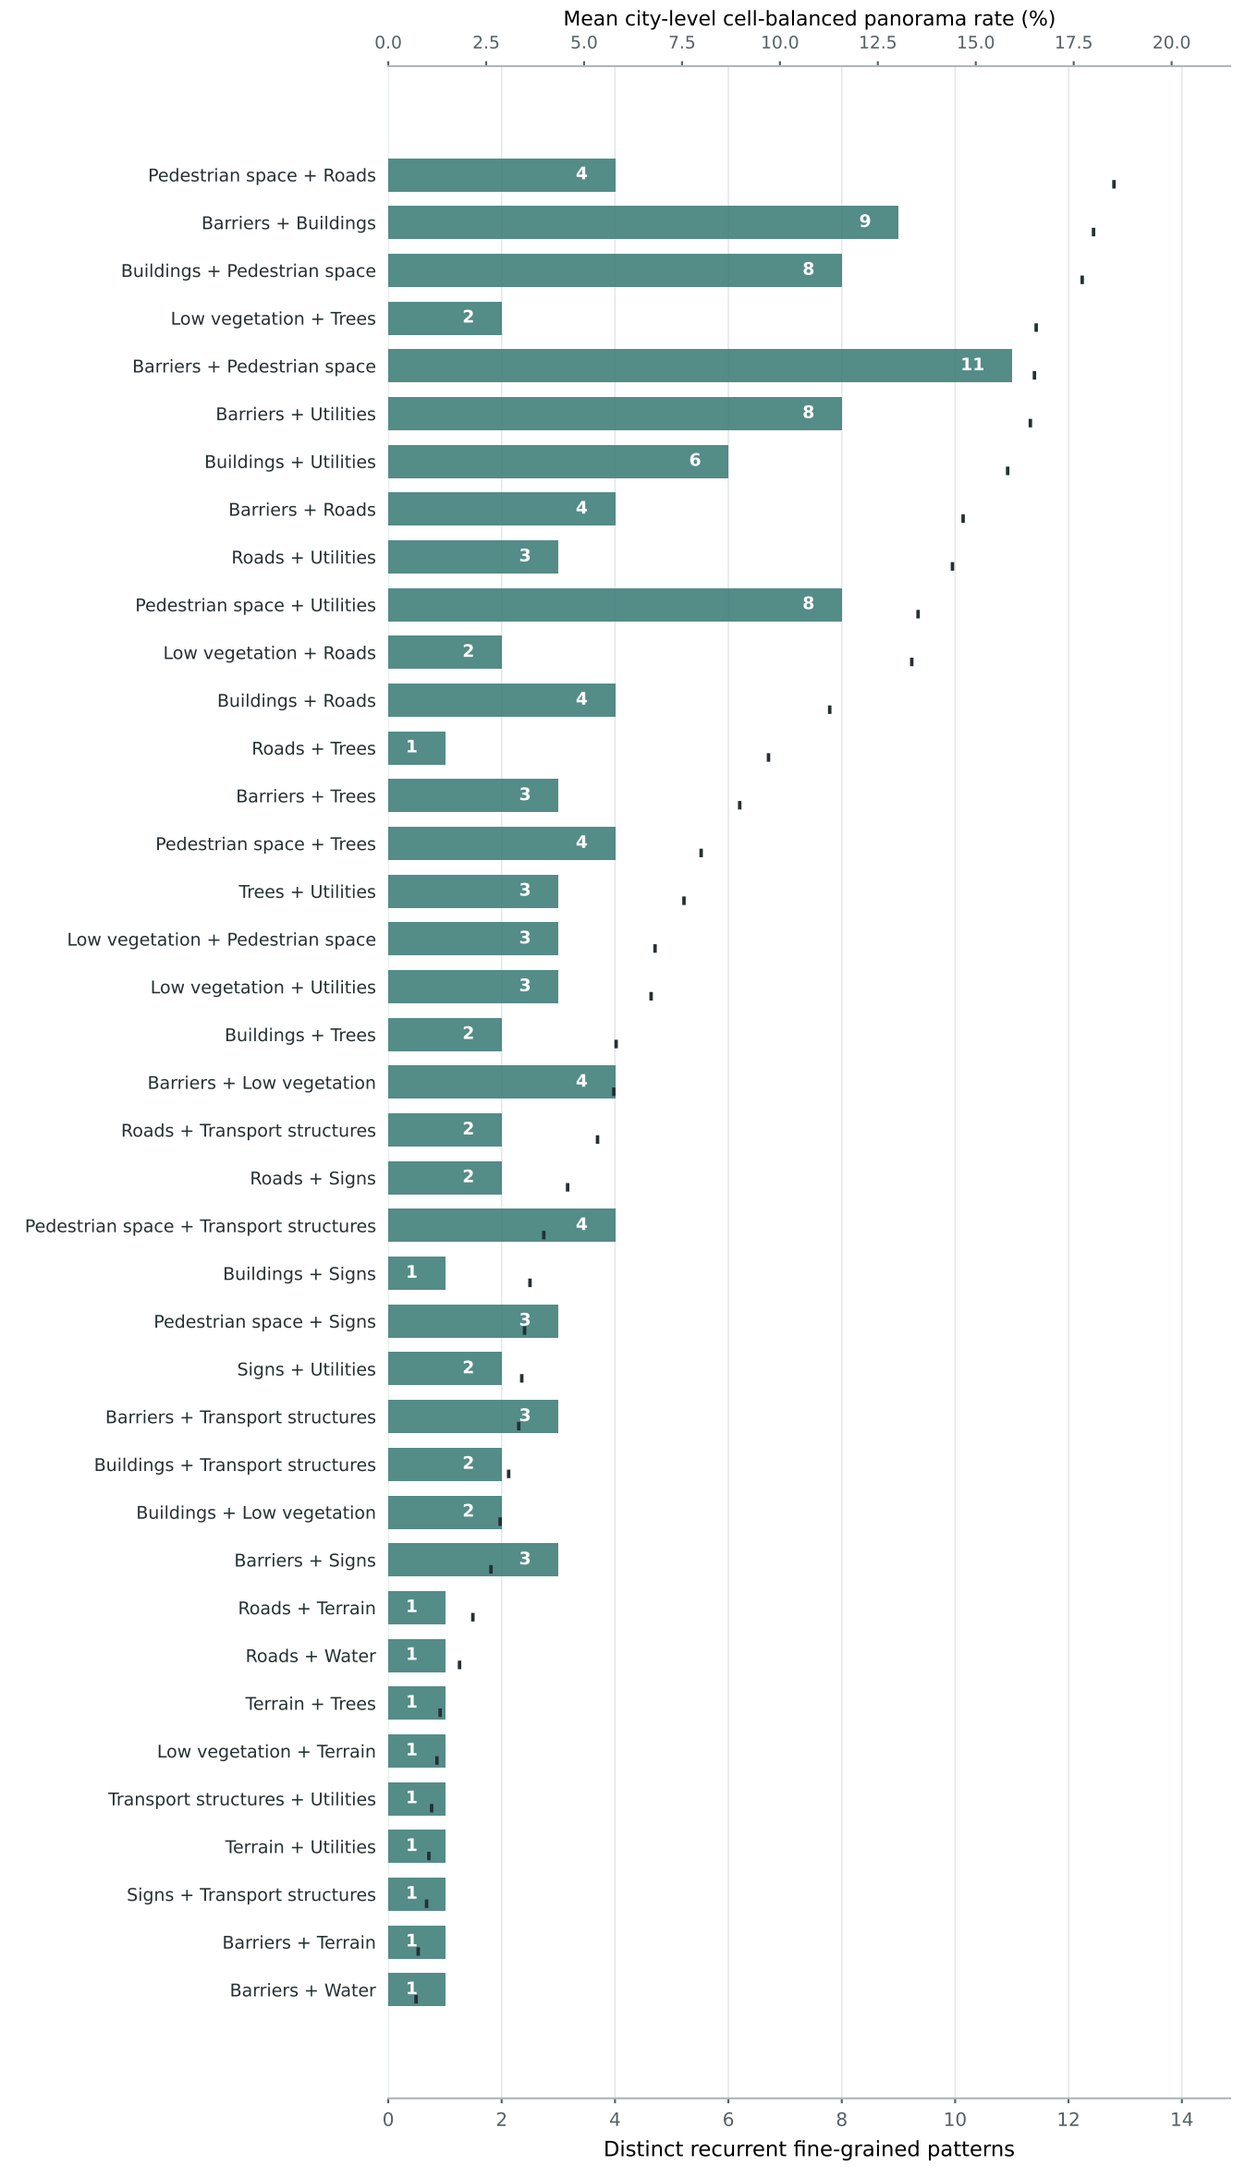

3-family classes | 31 signatures

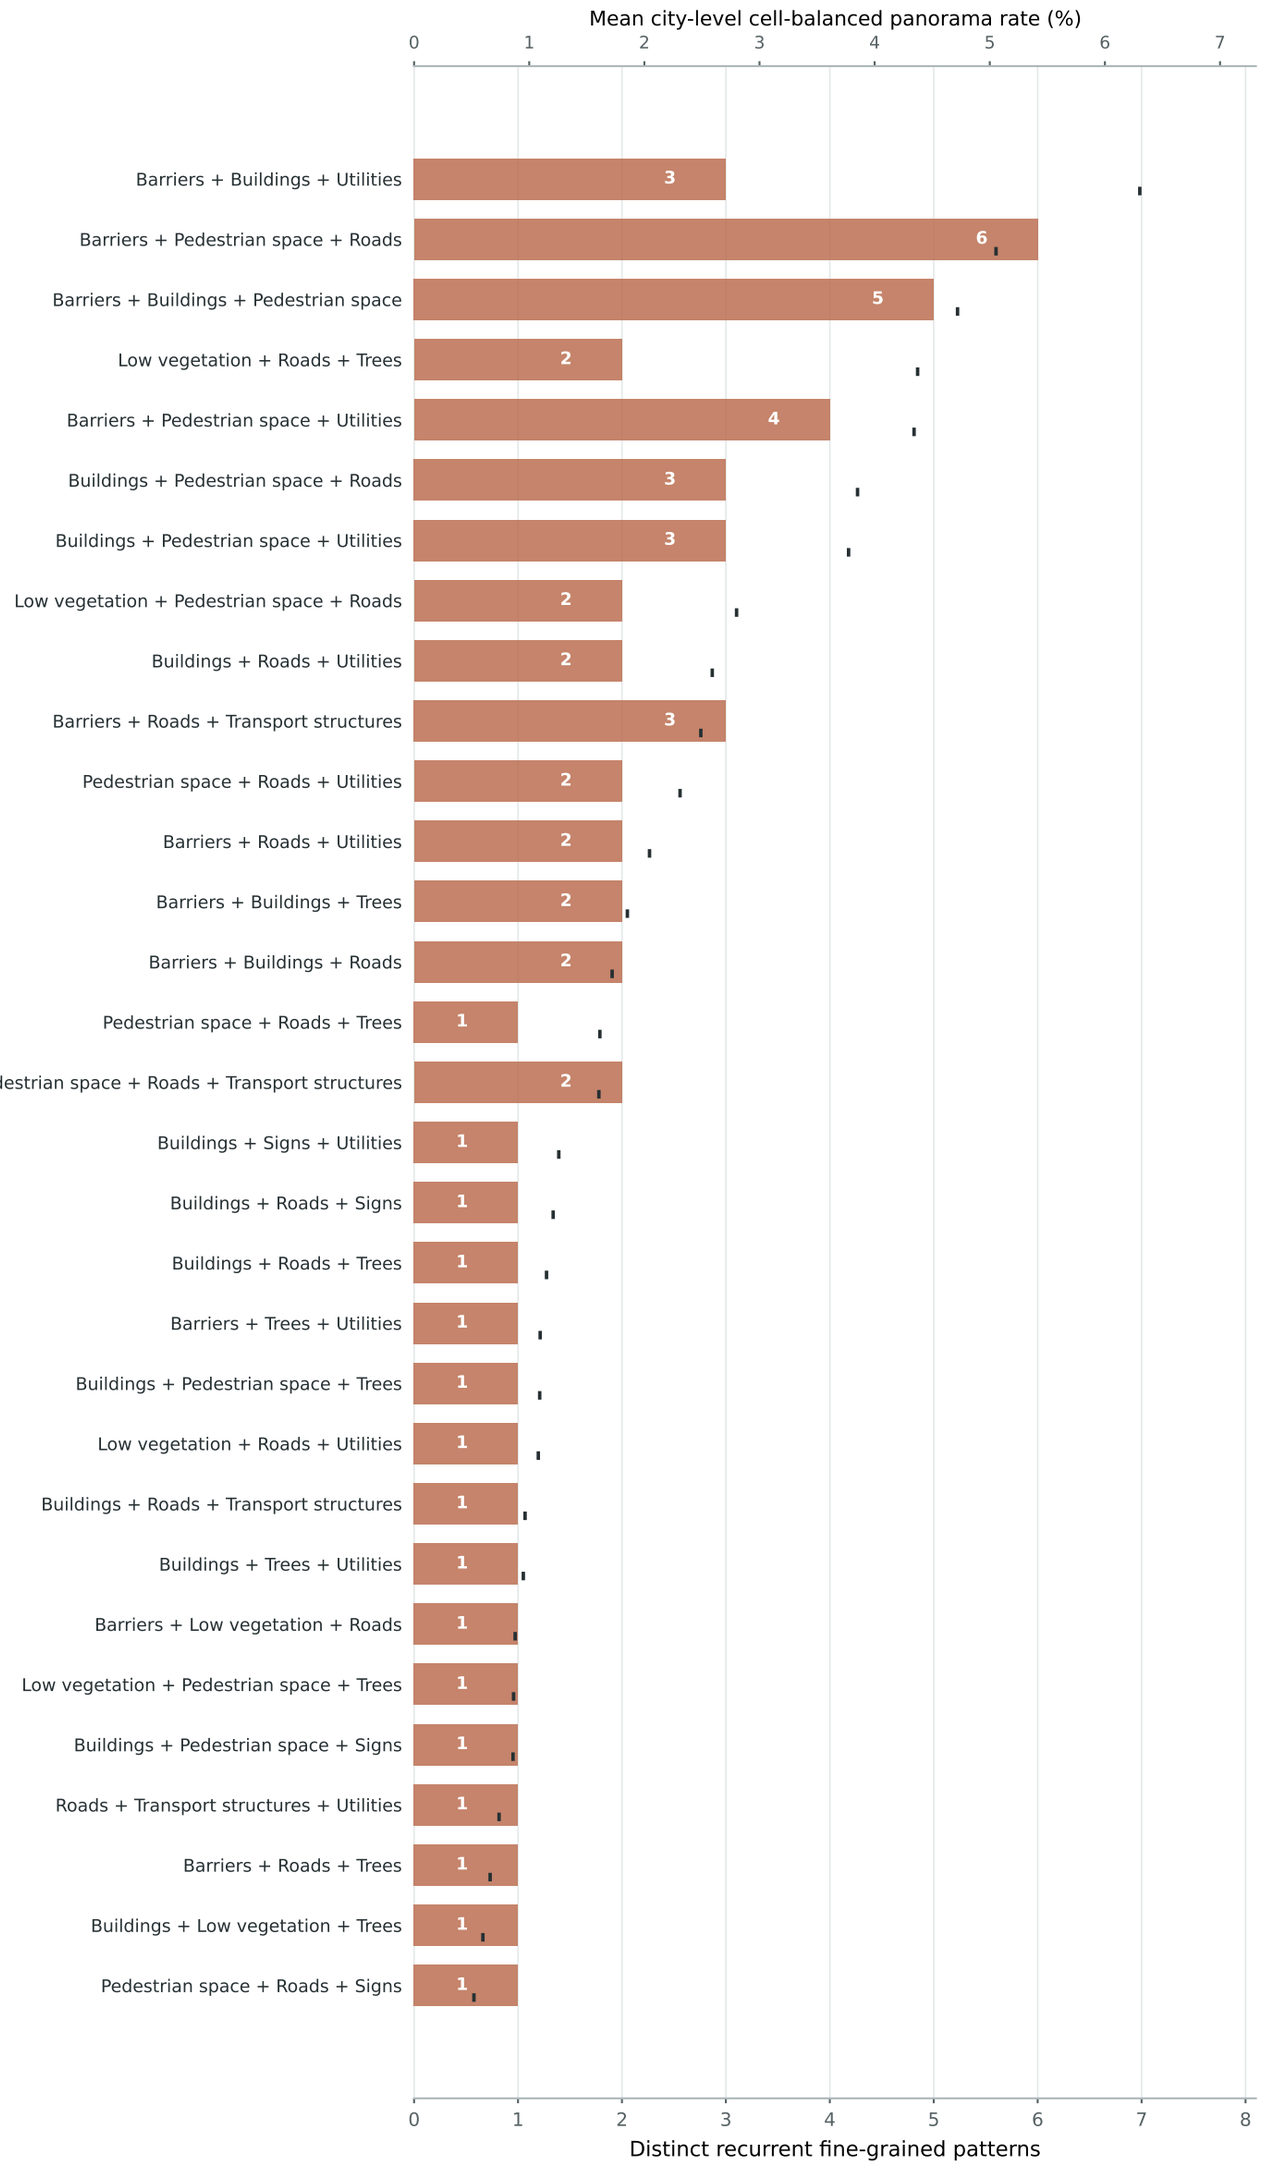

Class = the unordered set of semantic parent families in a combination. Bar length counts distinct subtype-level patterns; marker shows their mean city-level rate, weighting observed 1-km cells equally within each city and cities equally. The subtype patterns within one class are mutually exclusive under the one-unit-per-family assignment.

City distribution of the 20 most common landscape combination classes

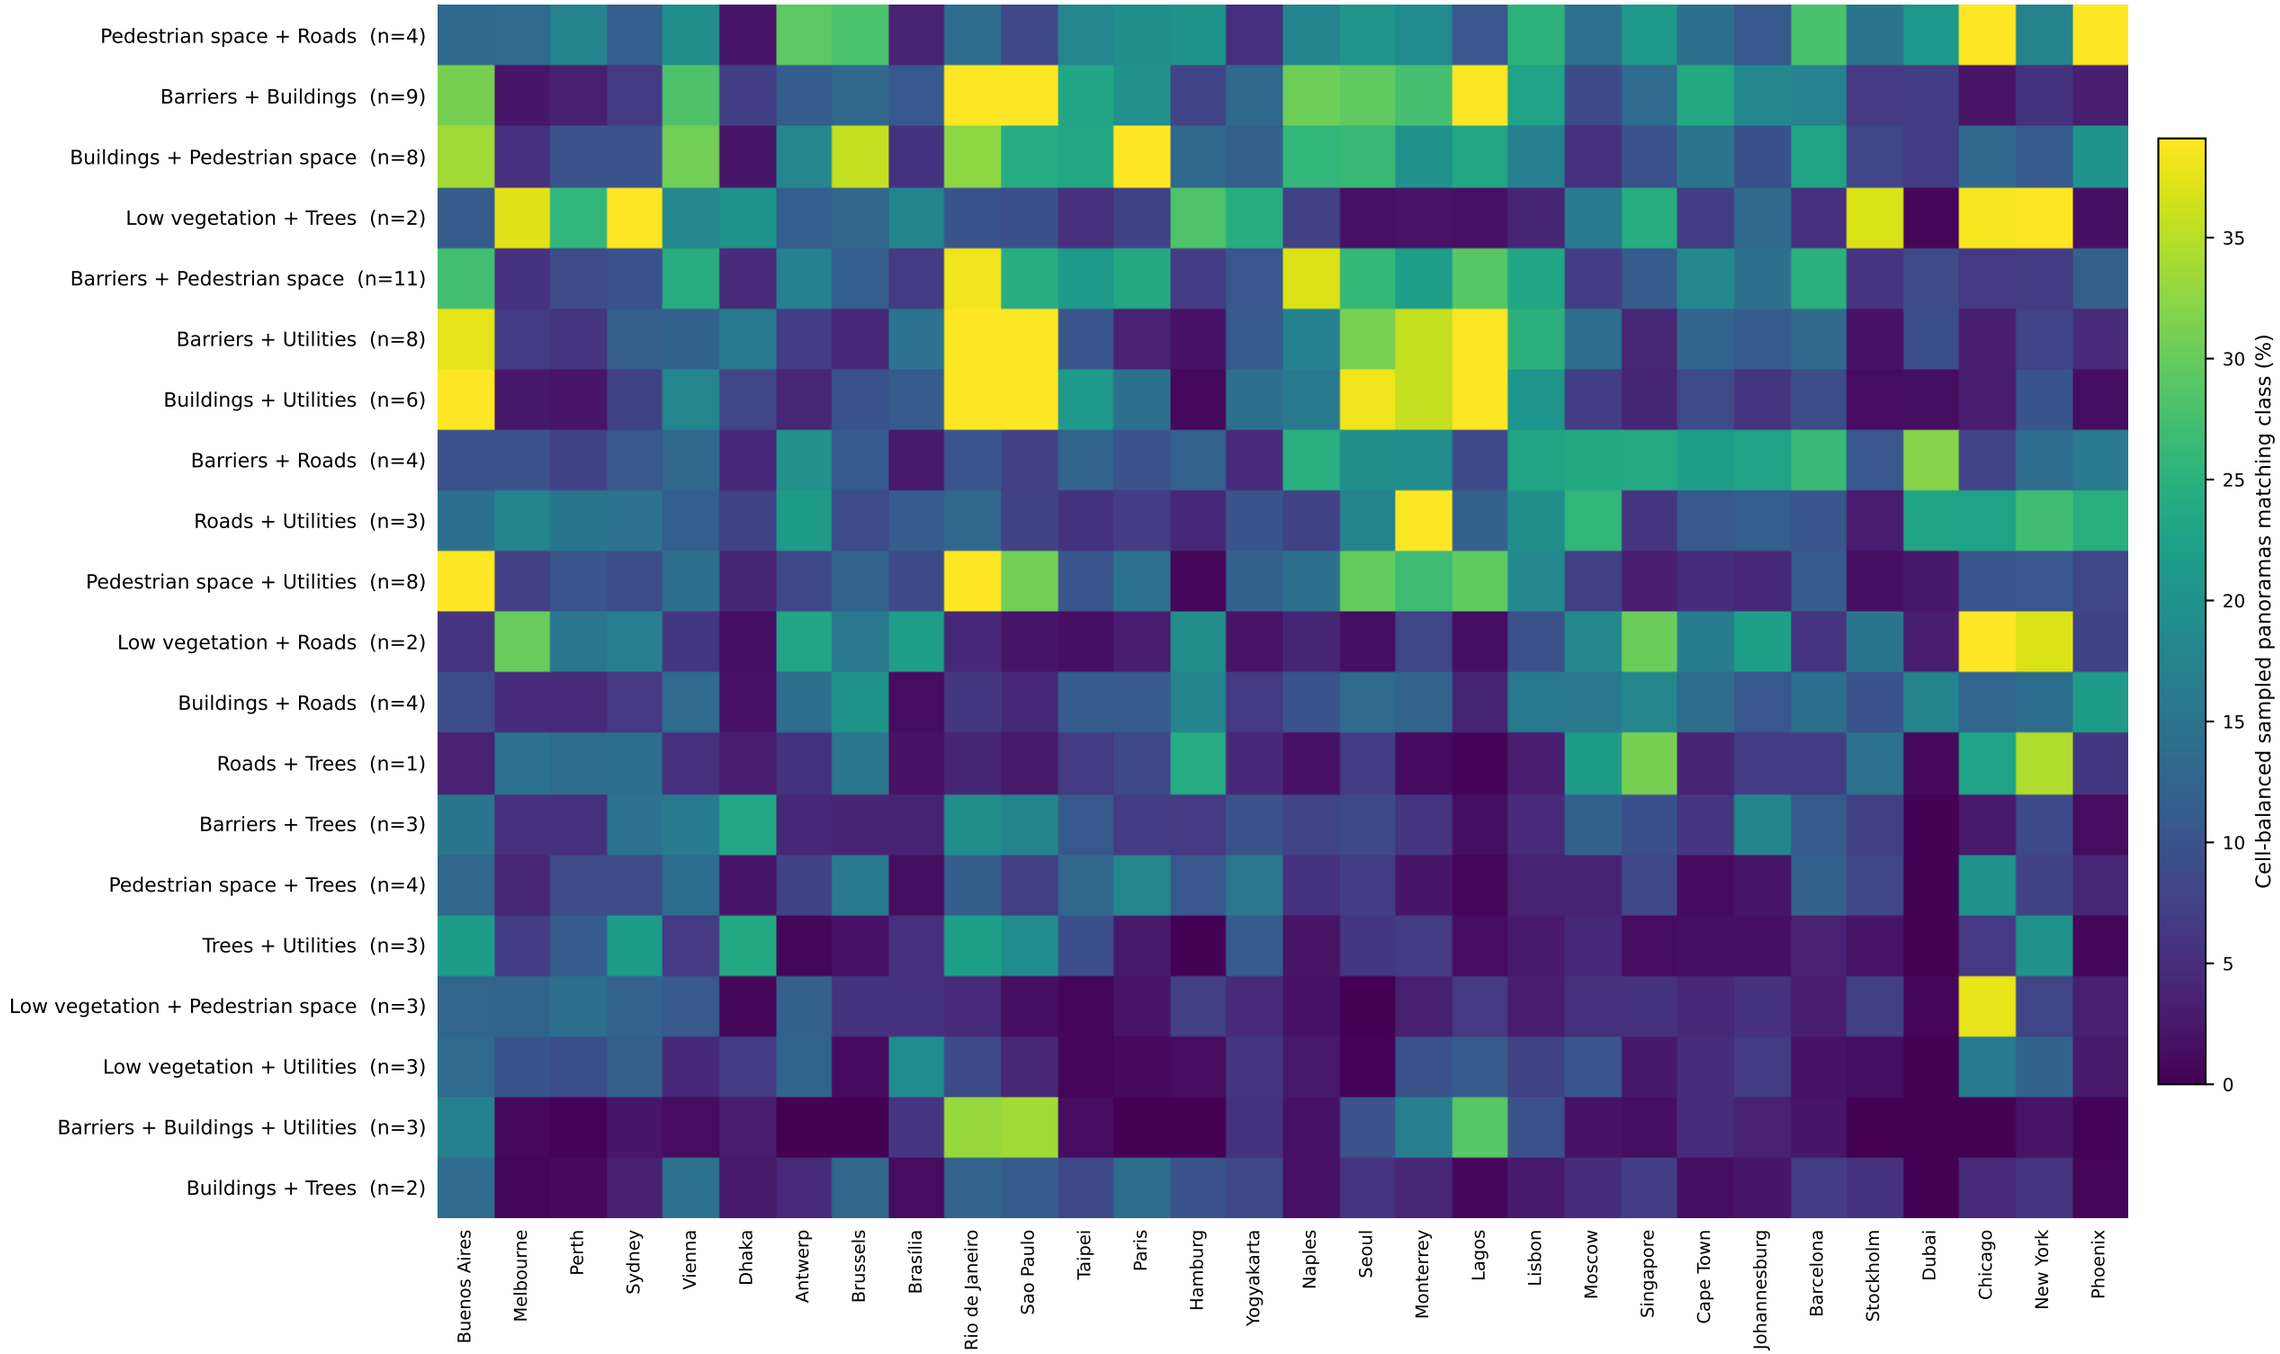

Showing 20 of 70 parent-family signatures. Class rates sum the mutually exclusive fine-grained patterns with the same parent-family signature. These are SAE-response retrieval rates, not physical object counts, patch coverage, or human-validated landscape prototypes.