


LogicComparator::preprocess
Expression

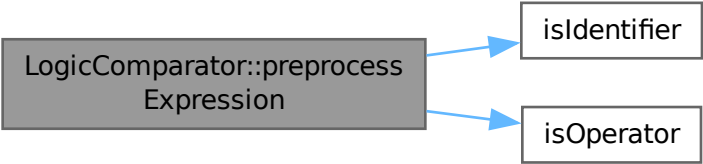

```
graph LR; A[LogicComparator::preprocess Expression] --> B[isIdentifier]; A --> C[isOperator];
```

The diagram illustrates a call graph for the `LogicComparator::preprocess` method. A central gray box labeled `LogicComparator::preprocess Expression` has two outgoing blue arrows. The top arrow points to a white box labeled `isIdentifier`, and the bottom arrow points to a white box labeled `isOperator`. Both target boxes have black borders.

isIdentifier

isOperator