


LogicComparator::preprocess
Expression

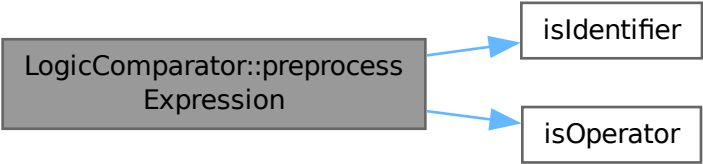

```
graph LR; A[LogicComparator::preprocess Expression] --> B[isIdentifier]; A --> C[isOperator];
```

The diagram illustrates a call graph for the `LogicComparator::preprocess Expression` function. A central gray box on the left represents the function call. Two blue arrows originate from its right side, pointing to two separate white boxes on the right. The top arrow points to a box labeled `isIdentifier`, and the bottom arrow points to a box labeled `isOperator`. This indicates that the `preprocess` function calls both `isIdentifier` and `isOperator` during its execution.

isIdentifier

isOperator