


LogicComparator::preprocess  
Expression

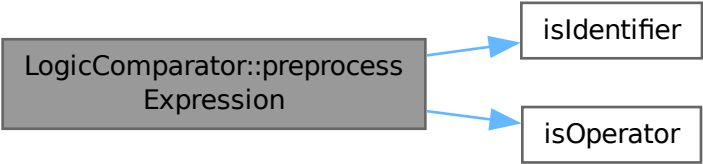

```
graph LR; A[LogicComparator::preprocess Expression] --> B[isIdentifier]; A --> C[isOperator];
```

The diagram illustrates a call graph for the `LogicComparator::preprocess Expression` function. A central gray box on the left represents the function. Two blue arrows originate from its right side, pointing to two white boxes on the right. The top arrow points to a box labeled `isIdentifier`, and the bottom arrow points to a box labeled `isOperator`. This indicates that the `preprocess` function calls both `isIdentifier` and `isOperator` during its execution.

isIdentifier

isOperator