

# Bayesian Cluster Tool

Generated by Doxygen 1.9.1

Fri May 12 2023 05:33:37



<b>1 Class Index</b>	<b>1</b>
1.1 Class List	1
<b>2 Class Documentation</b>	<b>3</b>
2.1 Cluster Class Reference	3
2.1.1 Detailed Description	4
2.1.2 Constructor & Destructor Documentation	4
2.1.2.1 Cluster()	4
2.1.3 Member Function Documentation	4
2.1.3.1 GetParent()	5
2.1.3.2 operator+=()	5
2.1.4 Member Data Documentation	5
2.1.4.1 mParams	5
2.2 Configuration Class Reference	6
2.2.1 Detailed Description	10
2.2.2 Member Function Documentation	10
2.2.2.1 alpha()	10
2.2.2.2 ClusterR()	11
2.2.2.3 ClusterT()	11
2.2.2.4 dR()	11
2.2.2.5 dT()	12
2.2.2.6 FromCommandline()	12
2.2.2.7 FromVector()	12
2.2.2.8 inputFile()	13
2.2.2.9 log_probability_sigma() <sup>[1/2]</sup>	13
2.2.2.10 log_probability_sigma() <sup>[2/2]</sup>	13
2.2.2.11 logAlpha()	14
2.2.2.12 logGammaAlpha()	14
2.2.2.13 logPb()	15
2.2.2.14 logPbDagger()	15
2.2.2.15 max2R()	15
2.2.2.16 max2R2()	16
2.2.2.17 maxR()	16
2.2.2.18 maxR2()	16
2.2.2.19 maxScanR()	17
2.2.2.20 maxScanT()	17
2.2.2.21 minScanR()	17
2.2.2.22 minScanT()	18
2.2.2.23 outputFile()	18
2.2.2.24 probability_sigma() <sup>[1/2]</sup>	18
2.2.2.25 probability_sigma() <sup>[2/2]</sup>	18
2.2.2.26 Rbins()	19

2.2.2.27	scale2()	19
2.2.2.28	SetAlpha()	19
2.2.2.29	SetCentre()	20
2.2.2.30	SetInputFile()	20
2.2.2.31	SetOutputFile()	21
2.2.2.32	SetPb()	21
2.2.2.33	SetRBins()	21
2.2.2.34	SetSigmaParameters()	22
2.2.2.35	SetTBins()	22
2.2.2.36	SetValidate()	23
2.2.2.37	SetZoom()	23
2.2.2.38	sigmabins() [1/2]	23
2.2.2.39	sigmabins() [2/2]	24
2.2.2.40	sigmabins2() [1/2]	24
2.2.2.41	sigmabins2() [2/2]	24
2.2.2.42	sigmacount()	25
2.2.2.43	sigmaspacing()	25
2.2.2.44	Tbins()	25
2.2.2.45	toAlgorithmUnits()	25
2.2.2.46	toAlgorithmX()	26
2.2.2.47	toAlgorithmY()	26
2.2.2.48	toPhysicalUnits()	27
2.2.2.49	toPhysicalX()	27
2.2.2.50	toPhysicalY()	28
2.2.2.51	validate()	28
2.3	Data Class Reference	29
2.3.1	Detailed Description	30
2.3.2	Constructor & Destructor Documentation	30
2.3.2.1	Data() [1/3]	30
2.3.2.2	Data() [2/3]	31
2.3.2.3	Data() [3/3]	31
2.3.3	Member Function Documentation	31
2.3.3.1	dPhi()	31
2.3.3.2	dR()	32
2.3.3.3	dR2()	32
2.3.3.4	operator<()	33
2.3.3.5	operator=() [1/2]	33
2.3.3.6	operator=() [2/2]	33
2.3.3.7	Preprocess()	34
2.4	DataProxy Class Reference	34
2.4.1	Detailed Description	36
2.4.2	Constructor & Destructor Documentation	36

2.4.2.1 DataProxy() [1/3]	36
2.4.2.2 DataProxy() [2/3]	36
2.4.2.3 DataProxy() [3/3]	36
2.4.3 Member Function Documentation	37
2.4.3.1 Clusterize() [1/2]	37
2.4.3.2 Clusterize() [2/2]	37
2.4.3.3 GetCluster()	38
2.4.3.4 operator=() [1/2]	38
2.4.3.5 operator=() [2/2]	38
2.5 Event Class Reference	39
2.5.1 Detailed Description	40
2.5.2 Constructor & Destructor Documentation	40
2.5.2.1 Event() [1/2]	40
2.5.2.2 Event() [2/2]	40
2.5.3 Member Function Documentation	40
2.5.3.1 Clusterize()	40
2.5.3.2 LoadCSV()	41
2.5.3.3 operator=() [1/2]	41
2.5.3.4 operator=() [2/2]	42
2.5.3.5 ScanRT()	42
2.5.3.6 WriteCSV()	42
2.6 EventProxy Class Reference	43
2.6.1 Detailed Description	44
2.6.2 Constructor & Destructor Documentation	44
2.6.2.1 EventProxy() [1/3]	44
2.6.2.2 EventProxy() [2/3]	45
2.6.2.3 EventProxy() [3/3]	45
2.6.3 Member Function Documentation	45
2.6.3.1 CheckClusterization()	45
2.6.3.2 Clusterize()	46
2.6.3.3 GetData()	46
2.6.3.4 operator=() [1/2]	46
2.6.3.5 operator=() [2/2]	47
2.6.3.6 ScanRT()	47
2.7 GSLInterpolator Class Reference	48
2.7.1 Detailed Description	48
2.8 Cluster::Parameter Struct Reference	48
2.8.1 Detailed Description	49
2.8.2 Member Function Documentation	49
2.8.2.1 log_score()	49
2.8.2.2 operator+=()	49
2.9 ProgressBar Struct Reference	50

---

2.9.1 Detailed Description . . . . .	51
2.9.2 Constructor & Destructor Documentation . . . . .	51
2.9.2.1 ProgressBar() . . . . .	51
2.9.3 Member Function Documentation . . . . .	51
2.9.3.1 operator++() . . . . .	51
2.10 ProgressBar2 Struct Reference . . . . .	52
2.10.1 Detailed Description . . . . .	52
2.10.2 Constructor & Destructor Documentation . . . . .	52
2.10.2.1 ProgressBar2() . . . . .	52
2.10.3 Member Function Documentation . . . . .	53
2.10.3.1 operator++() . . . . .	53
2.11 PyIterator< U > Struct Template Reference . . . . .	53
2.11.1 Detailed Description . . . . .	53
2.12 PyIterator< U * > Struct Template Reference . . . . .	54
2.12.1 Detailed Description . . . . .	54
<b>Index</b>	<b>55</b>

# Chapter 1

## Class Index

### 1.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

<a href="#">Cluster</a>	A class representing a cluster . . . . .	3
<a href="#">Configuration</a>	Class for storing the configuration parameters . . . . .	6
<a href="#">Data</a>	A class to store the raw data-points . . . . .	29
<a href="#">DataProxy</a>	A light-weight proxy for the raw data-points . . . . .	34
<a href="#">Event</a>	A class which holds the raw event data and global parameters . . . . .	39
<a href="#">EventProxy</a>	A lightweight wrapper for the event to store clusters for a given scan . . . . .	43
<a href="#">GSLInterpolator</a>	. . . . .	48
<a href="#">Cluster::Parameter</a>	A struct representing the cluster parameters . . . . .	48
<a href="#">ProgressBar</a>	A utility progress-bar . . . . .	50
<a href="#">ProgressBar2</a>	A utility code timer . . . . .	52
<a href="#">PyIterator&lt; U &gt;</a>	. . . . .	53
<a href="#">PyIterator&lt; U * &gt;</a>	. . . . .	54





## Chapter 2

# Class Documentation

### 2.1 Cluster Class Reference

A class representing a cluster.

```
#include <Cluster.hpp>
```

Collaboration diagram for Cluster:



#### Classes

- struct [Parameter](#)  
*A struct representing the cluster parameters.*

#### Public Member Functions

- [Cluster](#) ()  
*Default constructor.*
- [Cluster](#) (const [Data](#) &aData)  
*Construct a cluster from a single data-point.*
- [Cluster](#) & [operator+=](#) (const [Cluster](#) &aOther)  
*Add another cluster to this one.*
- [Cluster](#) \* [GetParent](#) ()  
*Get a pointer to this cluster's ultimate parent.*
- void [UpdateLogScore](#) ()  
*Update log-probability after a scan.*

## Public Attributes

- `std::vector< Parameter > mParams`  
*Get the points after clustering.*
- `std::size_t mClusterSize`  
*The number of points in the current cluster.*
- `std::size_t mLastClusterSize`  
*The number of points in the cluster on the previous scan iteration.*
- `PRECISION mClusterScore`  
*The log-probability of the current cluster.*
- `Cluster * mParent`  
*A pointer to the immediate parent of the current cluster.*
- `std::vector< Data * > mData`  
*List of points in the cluster after clustering.*

### 2.1.1 Detailed Description

A class representing a cluster.

Definition at line 14 of file Cluster.hpp.

### 2.1.2 Constructor & Destructor Documentation

#### 2.1.2.1 Cluster()

```
Cluster::Cluster (
    const Data & aData )
```

Construct a cluster from a single data-point.

Parameters

<i>aData</i>	A data-point with which to initialize the cluster
--------------	---

Definition at line 102 of file Cluster.cpp.

References `Configuration::Instance`, `mParams`, `Data::r2`, `Data::s`, `Data::x`, and `Data::y`.

### 2.1.3 Member Function Documentation

### 2.1.3.1 GetParent()

```
Cluster * Cluster::GetParent ( )
```

Get a pointer to this cluster's ultimate parent.

#### Returns

A pointer to this cluster's ultimate parent

Definition at line 161 of file Cluster.cpp.

References GetParent(), and mParent.

Referenced by DataProxy::GetCluster(), and GetParent().

### 2.1.3.2 operator+=()

```
Cluster & Cluster::operator+= (
    const Cluster & aOther )
```

Add another cluster to this one.

#### Parameters

<i>aOther</i>	Another cluster of parameters to add to this one
---------------	--

#### Returns

Reference to this, for chaining calls

Definition at line 151 of file Cluster.cpp.

References mClusterSize, and mParams.

## 2.1.4 Member Data Documentation

### 2.1.4.1 mParams

```
std::vector< Parameter > Cluster::mParams
```

Get the points after clustering.

**Returns**

Reference to a list of points in the cluster after clustering The collection of parameters, each corresponding to a different sigma hypothesis

Definition at line 78 of file Cluster.hpp.

Referenced by Cluster(), operator+=( ), and UpdateLogScore().

The documentation for this class was generated from the following files:


- include/BayesianClustering/Cluster.hpp
- src/BayesianClustering/Cluster.cpp

## 2.2 Configuration Class Reference

Class for storing the configuration parameters.

```
#include <Configuration.hpp>
```

Collaboration diagram for Configuration:



### Public Member Functions

- [Configuration](#) ()  
*Default constructor.*
- void [SetCentre](#) (const double &aPhysicalCentreX, const double &aPhysicalCentreY)  
*Setter for the centre of the scan window.*
- void [SetZoom](#) (const double &aScale)  
*Setter for the half-width of the scan window.*
- void [SetSigmaParameters](#) (const std::size\_t &aSigmacount, const double &aSigmaMin, const double &aSigmaMax, const std::function< double(const double &) > &aInterpolator)  
*Setter for the sigma-bins to be integrated over.*
- void [SetRBins](#) (const std::size\_t &aRbins, const double &aMinScanR=0.0, const double &aMaxScanR=-1)  
*Setter for the R bins for the RT scan.*
- void [SetTBins](#) (const std::size\_t &aTbins, const double &aMinScanT=0.0, const double &aMaxScanT=-1)
- void [SetPb](#) (const double &aPB)  
*Setter for the P\_b parameter.*
- void [SetAlpha](#) (const double &aAlpha)  
*Setter for the alpha parameter.*
- void [SetValidate](#) (const bool &aValidate)

- Set whether to validate clusterization.*

  - void [SetInputFile](#) (const std::string &aFileName)
  - Setter for the input file.*
  - void [SetOutputFile](#) (const std::string &aFileName)
  - Setter for the output file.*
  - void [FromCommandline](#) (int argc, char \*\*argv)
  - Parse the parameters when passed in as commandline arguments.*
  - void [FromVector](#) (const std::vector< std::string > &Args)
  - Parse the parameters when passed in as commandline arguments.*
  - const double & [scale2](#) () const
  - Getter for the scale-parameter squared.*
  - const std::size\_t & [sigmacount](#) () const
  - Getter for the sigma count.*
  - const double & [sigmaspacing](#) () const
  - Getter for the sigma spacing.*
  - const std::vector< double > & [sigmabins](#) () const
  - Getter for the values of sigma.*
  - const std::vector< double > & [sigmabins2](#) () const
  - Getter for the values of sigma squared.*
  - const std::vector< double > & [probability\\_sigma](#) () const
  - Getter for the probabilities of a given sigma.*
  - const std::vector< double > & [log\\_probability\\_sigma](#) () const
  - Getter for the log of the probabilities of a given sigma.*
  - const double & [sigmabins](#) (const std::size\_t &i) const
  - Getter for the i'th value of sigma.*
  - const double & [sigmabins2](#) (const std::size\_t &i) const
  - Getter for the i'th value of sigma squared.*
  - const double & [probability\\_sigma](#) (const std::size\_t &i) const
  - Getter for the probability of the i'th value of sigma.*
  - const double & [log\\_probability\\_sigma](#) (const std::size\_t &i) const
  - Getter for the log-probability of the i'th value of sigma.*
  - const double & [maxR](#) () const
  - Getter for the maximum value of R.*
  - const double & [maxR2](#) () const
  - Getter for the maximum value of R squared.*
  - const double & [max2R](#) () const
  - Getter for the maximum value of 2R.*
  - const double & [max2R2](#) () const
  - Getter for the maximum value of 2R squared.*
  - const double & [minScanR](#) () const
  - Getter for the lowest value of R to scan.*
  - const double & [maxScanR](#) () const
  - Getter for the highest value of R to scan.*
  - const double & [minScanT](#) () const
  - Getter for the lowest value of T to scan.*
  - const double & [maxScanT](#) () const
  - Getter for the highest value of T to scan.*
  - const double & [dR](#) () const
  - Getter for the spacing of value of R to scan.*
  - const std::size\_t & [Rbins](#) () const
  - Getter for the number of R values to scan.*

- const double & **dT** () const  
*Getter for the spacing of value of T to scan.*
- const std::size\_t & **Tbins** () const  
*Getter for the number of T values to scan.*
- const double & **logPb** () const  
*Logarithm of the P\_b parameter*
- const double & **logPbDagger** () const  
*Logarithm of the ( 1 - P\_b ) parameter*
- const double & **alpha** () const  
*Getter for the alpha parameter*
- const double & **logAlpha** () const  
*Getter for the logarithm of the alpha parameter*
- const double & **logGammaAlpha** () const  
*Getter for the logarithm of the gamma function of alpha parameter*
- const bool & **validate** () const  
*Getter for whether or not to run the validation on the clustering.*
- const std::string & **inputFile** () const  
*Getter for the input file.*
- const std::string & **outputFile** () const  
*Getter for the output file.*
- const double & **ClusterR** () const  
*Getter for the R value for a clusterization pass.*
- const double & **ClusterT** () const  
*Getter for the T value for a clusterization pass.*
- double **toPhysicalUnits** (const double &aAlgorithmUnits) const  
*Utility function to convert a normalized algorithm distance to physical distance.*
- double **toAlgorithmUnits** (const double &aPhysicalUnits) const  
*Utility function to convert physical distances to a normalized algorithm distances.*
- double **toPhysicalX** (const double &aAlgorithmX) const  
*Utility function to convert a normalized algorithm x-coordinate to a physical x-coordinate.*
- double **toAlgorithmX** (const double &aPhysicalX) const  
*Utility function to convert a physical x-coordinate to a normalized algorithm x-coordinate.*
- double **toPhysicalY** (const double &aAlgorithmY) const  
*Utility function to convert a normalized algorithm y-coordinate to a physical y-coordinate.*
- double **toAlgorithmY** (const double &aPhysicalY) const  
*Utility function to convert a physical y-coordinate to a normalized algorithm y-coordinate.*
- double **getCentreX** () const
- double **getCentreY** () const
- double **getZoom** () const

## Static Public Member Functions

- static **Configuration** & **getInstance** ()

## Static Public Attributes

- static [Configuration Instance](#)  
*A single global copy of the global variables.*

## Private Attributes

- double [mScale](#)  
*The scale parameter.*
- double [mScale2](#)  
*The scale parameter squared.*
- double [mPhysicalCentreX](#)  
*The x-coordinate of the centre of the window in physical units.*
- double [mPhysicalCentreY](#)  
*The y-coordinate of the centre of the window in physical units.*
- std::size\_t [mSigmacount](#)  
*The number of sigma bins.*
- double [mSigmaspacing](#)  
*The spacing of sigma bins.*
- std::vector< double > [mSigmabins](#)  
*The values of sigma.*
- std::vector< double > [mSigmabins2](#)  
*The values of sigma squared.*
- std::vector< double > [mProbabilitySigma](#)  
*The probability of a given sigma.*
- std::vector< double > [mLogProbabilitySigma](#)  
*The log-probability of a given sigma.*
- double [mMaxR](#)  
*The maximum value of R.*
- double [mMaxR2](#)  
*The maximum value of R squared.*
- double [mMax2R](#)  
*The maximum value of 2R*
- double [mMax2R2](#)  
*The maximum value of 2R squared.*
- double [mMinScanR](#)  
*The lowest value of R to scan.*
- double [mMaxScanR](#)  
*The largest value of R to scan.*
- double [mMinScanT](#)  
*The lowest value of T to scan.*
- double [mMaxScanT](#)  
*The largest value of T to scan.*
- double [mDR](#)  
*The spacing of value of R to scan.*
- double [mDT](#)  
*The spacing of value of T to scan.*
- std::size\_t [mRbins](#)  
*The number of R values to scan.*

- `std::size_t mTbins`  
*The number of T values to scan.*
- `double mAlpha`  
*The alpha parameter.*
- `double mLogAlpha`  
*Logarithm of the alpha parameter.*
- `double mLogGammaAlpha`  
*Logarithm of the gamma function of alpha parameter*
- `double mLogPb`  
*Logarithm of the  $P_b$  parameter*
- `double mLogPbDagger`  
*Logarithm of the  $(1 - P_b)$  parameter*
- `bool mValidate`  
*Whether or not to run the validation on the clustering.*
- `std::string mInputFile`  
*The input event file.*
- `std::string mOutputFile`  
*The output file.*
- `double mClusterR`  
*The value of R for clustering.*
- `double mClusterT`  
*The value of T for clustering.*

## 2.2.1 Detailed Description

Class for storing the configuration parameters.

Definition at line 71 of file Configuration.hpp.

## 2.2.2 Member Function Documentation

### 2.2.2.1 alpha()

```
const double& Configuration::alpha ( ) const [inline]
```

Getter for the alpha parameter

#### Returns

The alpha parameter

Definition at line 224 of file Configuration.hpp.

References `mAlpha`.



### 2.2.2.2 ClusterR()

```
const double& Configuration::ClusterR ( ) const [inline]
```

Getter for the R value for a clusterization pass.

#### Returns

The R value for a clusterization pass

Definition at line 247 of file Configuration.hpp.

References mClusterR.

### 2.2.2.3 ClusterT()

```
const double& Configuration::ClusterT ( ) const [inline]
```

Getter for the T value for a clusterization pass.

#### Returns

The T value for a clusterization pass

Definition at line 250 of file Configuration.hpp.

References mClusterT.

### 2.2.2.4 dR()

```
const double& Configuration::dR ( ) const [inline]
```

Getter for the spacing of value of R to scan.

#### Returns

The spacing of value of R to scan

Definition at line 204 of file Configuration.hpp.

References mDR.

### 2.2.2.5 dT()

```
const double& Configuration::dT ( ) const [inline]
```

Getter for the spacing of value of T to scan.

#### Returns

The spacing of value of T to scan

Definition at line 210 of file Configuration.hpp.

References mDT.

Referenced by EventProxy::ScanRT().

### 2.2.2.6 FromCommandline()

```
void Configuration::FromCommandline (
    int argc,
    char ** argv )
```

Parse the parameters when passed in as commandline arguments.

#### Parameters

<i>argc</i>	The number of commandline arguments
<i>argv</i>	The commandline arguments

Definition at line 147 of file Configuration.cpp.

References FromVector().

### 2.2.2.7 FromVector()

```
void Configuration::FromVector (
    const std::vector< std::string > & aArgs )
```

Parse the parameters when passed in as commandline arguments.

#### Parameters

<i>aArgs</i>	The commandline arguments
--------------	---------------------------

Definition at line 153 of file Configuration.cpp.

References mClusterR, mClusterT, SetAlpha(), SetCentre(), SetInputFile(), SetOutputFile(), SetPb(), SetRBins(), SetSigmaParameters(), SetTBins(), SetValidate(), SetZoom(), and toAlgorithmUnits().

Referenced by FromCommandline().

### 2.2.2.8 inputFile()

```
const std::string& Configuration::inputFile ( ) const [inline]
```

Getter for the input file.

#### Returns

The name of the input event file

Definition at line 239 of file Configuration.hpp.

References mInputFile.

Referenced by Event::Event().

### 2.2.2.9 log\_probability\_sigma() [1/2]

```
const std::vector< double >& Configuration::log_probability_sigma ( ) const [inline]
```

Getter for the log of the probabilities of a given sigma.

#### Returns

The log of the probabilities of given sigma

Definition at line 157 of file Configuration.hpp.

References mLogProbabilitySigma.

Referenced by Cluster::UpdateLogScore().

### 2.2.2.10 log\_probability\_sigma() [2/2]

```
const double& Configuration::log_probability_sigma (
    const std::size_t & i ) const [inline]
```

Getter for the log-probability of the i'th value of sigma.

**Parameters**

<i>i</i>	The index of the value of sigma to get the log-probability for
----------	--

**Returns**

The log-probability of sigma\_i

Definition at line 174 of file Configuration.hpp.

References mLogProbabilitySigma.

**2.2.2.11 logAlpha()**

```
const double& Configuration::logAlpha ( ) const [inline]
```

Getter for the logarithm of the alpha parameter

**Returns**

The logarithm of the alpha parameter

Definition at line 227 of file Configuration.hpp.

References mLogAlpha.

**2.2.2.12 logGammaAlpha()**

```
const double& Configuration::logGammaAlpha ( ) const [inline]
```

Getter for the logarithm of the gamma function of alpha parameter

**Returns**

The logarithm of the gamma function of alpha parameter

Definition at line 230 of file Configuration.hpp.

References mLogGammaAlpha.

### 2.2.2.13 logPb()

```
const double& Configuration::logPb ( ) const [inline]
```

Logarithm of the  $P_b$  parameter

#### Returns

Logarithm of the  $P_b$  parameter

Definition at line 217 of file Configuration.hpp.

References mLogPb.

Referenced by EventProxy::UpdateLogScore().

### 2.2.2.14 logPbDagger()

```
const double& Configuration::logPbDagger ( ) const [inline]
```

Logarithm of the  $(1 - P_b)$  parameter

#### Returns

Logarithm of the  $(1 - P_b)$  parameter

Definition at line 220 of file Configuration.hpp.

References mLogPbDagger.

### 2.2.2.15 max2R()

```
const double& Configuration::max2R ( ) const [inline]
```

Getter for the maximum value of 2R.

#### Returns

The maximum value of 2R

Definition at line 184 of file Configuration.hpp.

References mMax2R.

Referenced by Data::Preprocess().

#### 2.2.2.16 max2R2()

```
const double& Configuration::max2R2 ( ) const [inline]
```

Getter for the maximum value of 2R squared.

##### Returns

The maximum value of 2R squared

Definition at line 187 of file Configuration.hpp.

References mMax2R2.

#### 2.2.2.17 maxR()

```
const double& Configuration::maxR ( ) const [inline]
```

Getter for the maximum value of R.

##### Returns

The maximum value of R

Definition at line 178 of file Configuration.hpp.

References mMaxR.

#### 2.2.2.18 maxR2()

```
const double& Configuration::maxR2 ( ) const [inline]
```

Getter for the maximum value of R squared.

##### Returns

The maximum value of R squared

Definition at line 181 of file Configuration.hpp.

References mMaxR2.

### 2.2.2.19 maxScanR()

```
const double& Configuration::maxScanR ( ) const [inline]
```

Getter for the highest value of R to scan.

#### Returns

The highest value of R to scan

Definition at line 194 of file Configuration.hpp.

References mMaxScanR.

### 2.2.2.20 maxScanT()

```
const double& Configuration::maxScanT ( ) const [inline]
```

Getter for the highest value of T to scan.

#### Returns

The highest value of T to scan

Definition at line 200 of file Configuration.hpp.

References mMaxScanT.

Referenced by EventProxy::ScanRT().

### 2.2.2.21 minScanR()

```
const double& Configuration::minScanR ( ) const [inline]
```

Getter for the lowest value of R to scan.

#### Returns

The lowest value of R to scan

Definition at line 191 of file Configuration.hpp.

References mMinScanR.

#### 2.2.2.22 minScanT()

```
const double& Configuration::minScanT ( ) const [inline]
```

Getter for the lowest value of T to scan.

##### Returns

The lowest value of T to scan

Definition at line 197 of file Configuration.hpp.

References mMinScanT.

#### 2.2.2.23 outputFile()

```
const std::string& Configuration::outputFile ( ) const [inline]
```

Getter for the output file.

##### Returns

The name of the output file

Definition at line 242 of file Configuration.hpp.

References mOutputFile.

#### 2.2.2.24 probability\_sigma() [1/2]

```
const std::vector< double >& Configuration::probability_sigma ( ) const [inline]
```

Getter for the probabilities of a given sigma.

##### Returns

The probabilities of given sigma

Definition at line 154 of file Configuration.hpp.

References mProbabilitySigma.

#### 2.2.2.25 probability\_sigma() [2/2]

```
const double& Configuration::probability_sigma (
    const std::size_t & i ) const [inline]
```

Getter for the probability of the i'th value of sigma.



## Parameters

<i>i</i>	The index of the value of sigma to get the probability for
----------	--

## Returns

The probability of sigma\_*i*

Definition at line 170 of file Configuration.hpp.

References mProbabilitySigma.

**2.2.2.26 Rbins()**

```
const std::size_t& Configuration::Rbins ( ) const [inline]
```

Getter for the number of R values to scan.

## Returns

The number of R values to scan

Definition at line 207 of file Configuration.hpp.

References mRbins.

Referenced by EventProxy::ScanRT().

**2.2.2.27 scale2()**

```
const double& Configuration::scale2 ( ) const [inline]
```

Getter for the scale-parameter squared.

## Returns

The scale-parameter squared

Definition at line 136 of file Configuration.hpp.

References mScale2.

**2.2.2.28 SetAlpha()**

```
void Configuration::SetAlpha (
    const double & aAlpha )
```

Setter for the alpha parameter.

**Parameters**

<i>aAlpha</i>	The alpha parameter
---------------	---------------------

Definition at line 100 of file Configuration.cpp.

References mAlpha, mLogAlpha, and mLogGammaAlpha.

Referenced by FromVector().

**2.2.2.29 SetCentre()**

```
void Configuration::SetCentre (
    const double & aPhysicalCentreX,
    const double & aPhysicalCentreY )
```

Setter for the centre of the scan window.

**Parameters**

<i>aPhysicalCentreX</i>	The x-coordinate of the centre of the window in physical units (becomes 0 in algorithm units)
<i>aPhysicalCentreY</i>	The y-coordinate of the centre of the window in physical units (becomes 0 in algorithm units)

Definition at line 36 of file Configuration.cpp.

References mPhysicalCentreX, and mPhysicalCentreY.

Referenced by FromVector().

**2.2.2.30 SetInputFile()**

```
void Configuration::SetInputFile (
    const std::string & aFileName )
```

Setter for the input file.

**Parameters**

<i>aFileName</i>	The name of the file
------------------	----------------------

Definition at line 116 of file Configuration.cpp.

References mInputFile.

Referenced by FromVector().

### 2.2.2.31 SetOutputFile()

```
void Configuration::SetOutputFile (
    const std::string & aFileName )
```

Setter for the output file.

#### Parameters

<i>aFileName</i>	The name of the file
------------------	----------------------

Definition at line 123 of file Configuration.cpp.

References mOutputFile.

Referenced by FromVector().

### 2.2.2.32 SetPb()

```
void Configuration::SetPb (
    const double & aPB )
```

Setter for the P\_b parameter.

#### Parameters

<i>aPB</i>	The P_b parameter
------------	-------------------

Definition at line 93 of file Configuration.cpp.

References mLogPb, and mLogPbDagger.

Referenced by FromVector().

### 2.2.2.33 SetRBins()

```
void Configuration::SetRBins (
    const std::size_t & aRbins,
    const double & aMinScanR = 0.0,
    const double & aMaxScanR = -1 )
```

Setter for the R bins for the RT scan.

#### Parameters

<i>aRbins</i>	The number of R bins to scan over
<i>aMinScanR</i>	The lowest value of R to scan
<i>aMaxScanR</i>	The largest value of R to scan

Definition at line 68 of file Configuration.cpp.

References mDR, mMax2R, mMax2R2, mMaxR, mMaxR2, mMaxScanR, mMinScanR, mRbins, toAlgorithmUnits(), and toPhysicalUnits().

Referenced by FromVector().

### 2.2.2.34 SetSigmaParameters()

```
void Configuration::SetSigmaParameters (
    const std::size_t & aSigmaCount,
    const double & aSigmaMin,
    const double & aSigmaMax,
    const std::function< double(const double &) > & aInterpolator )
```

Setter for the sigma-bins to be integrated over.

#### Parameters

<i>aSigmaCount</i>	The number of sigma bins
<i>aSigmaMin</i>	The lowest sigma bin
<i>aSigmaMax</i>	The highest sigma bin
<i>aInterpolator</i>	Function-object to generate the probability of any given sigma

Definition at line 50 of file Configuration.cpp.

References mLogProbabilitySigma, mProbabilitySigma, mScale, mSigabins, mSigabins2, mSigmaCount, mSigaspacing, and toAlgorithmUnits().

Referenced by FromVector().

### 2.2.2.35 SetTBins()

```
void Configuration::SetTBins (
    const std::size_t & aTbins,
    const double & aMinScanT = 0.0,
    const double & aMaxScanT = -1 )
```

#### Parameters

<i>aTbins</i>	The number of T bins to scan over
<i>aMinScanT</i>	The lowest value of T to scan
<i>aMaxScanT</i>	The largest value of T to scan

Definition at line 83 of file Configuration.cpp.

References mDT, mMaxScanT, mMinScanT, mTbins, toAlgorithmUnits(), and toPhysicalUnits().

Referenced by FromVector().

### 2.2.2.36 SetValidate()

```
void Configuration::SetValidate (
    const bool & aValidate )
```

Set whether to validate clusterization.

#### Parameters

<i>aValidate</i>	Whether to validate clusterization
------------------	------------------------------------

Definition at line 108 of file Configuration.cpp.

References mValidate.

Referenced by FromVector().

### 2.2.2.37 SetZoom()

```
void Configuration::SetZoom (
    const double & aScale )
```

Setter for the half-width of the scan window.

#### Parameters

<i>aScale</i>	The scale of the window in physical units (becomes $\pm 1$ in algorithm units)
---------------	--

Definition at line 43 of file Configuration.cpp.

References mScale, and mScale2.

Referenced by FromVector().

### 2.2.2.38 sigmabins() [1/2]

```
const std::vector< double >& Configuration::sigmabins ( ) const [inline]
```

Getter for the values of sigma.

#### Returns

The values of sigma

Definition at line 148 of file Configuration.hpp.

References mSigmabins.

**2.2.2.39 sigmabins()** [2/2]

```
const double& Configuration::sigmabins (
    const std::size_t & i ) const [inline]
```

Getter for the i'th value of sigma.

**Parameters**

<i>i</i>	The index of the value of sigma to get
----------	--

**Returns**

The value of sigma\_i

Definition at line 162 of file Configuration.hpp.

References mSigmabins.

**2.2.2.40 sigmabins2()** [1/2]

```
const std::vector< double >& Configuration::sigmabins2 ( ) const [inline]
```

Getter for the values of sigma squared.

**Returns**

The values of sigma squared

Definition at line 151 of file Configuration.hpp.

References mSigmabins2.

**2.2.2.41 sigmabins2()** [2/2]

```
const double& Configuration::sigmabins2 (
    const std::size_t & i ) const [inline]
```

Getter for the i'th value of sigma squared.

**Parameters**

<i>i</i>	The index of the value of sigma squared to get
----------	--

**Returns**

The value of `sigma_i` squared

Definition at line 166 of file `Configuration.hpp`.

References `mSigmabins2`.

**2.2.2.42 sigmacount()**

```
const std::size_t& Configuration::sigmacount ( ) const [inline]
```

Getter for the sigma count.

**Returns**

The sigma count

Definition at line 140 of file `Configuration.hpp`.

References `mSigmacount`.

Referenced by `Cluster::UpdateLogScore()`.

**2.2.2.43 sigmaspacing()**

```
const double& Configuration::sigmaspacing ( ) const [inline]
```

Getter for the sigma spacing.

**Returns**

The sigma spacing

Definition at line 144 of file `Configuration.hpp`.

References `mSigmaspacing`.

**2.2.2.44 Tbins()**

```
const std::size_t& Configuration::Tbins ( ) const [inline]
```

Getter for the number of T values to scan.

**Returns**

The number of T values to scan

Definition at line 213 of file `Configuration.hpp`.

References `mTbins`.

Referenced by `EventProxy::ScanRT()`.

**2.2.2.45 toAlgorithmUnits()**

```
double Configuration::toAlgorithmUnits (
    const double & aPhysicalUnits ) const [inline]
```

Utility function to convert physical distances to a normalized algorithm distances.

**Parameters**

<i>aPhysicalUnits</i>	A physical distance
-----------------------	---------------------

**Returns**

A normalized algorithm distances

Definition at line 264 of file Configuration.hpp.

References mScale.

Referenced by FromVector(), SetRBins(), SetSigmaParameters(), SetTBins(), toAlgorithmX(), and toAlgorithmY().

**2.2.2.46 toAlgorithmX()**

```
double Configuration::toAlgorithmX (
    const double & aPhysicalX ) const [inline]
```

Utility function to convert a physical x-coordinate to a normalized algorithm x-coordinate.

**Parameters**

<i>aPhysicalX</i>	A physical x-coordinate
-------------------	-------------------------

**Returns**

A normalized x-coordinate

Definition at line 280 of file Configuration.hpp.

References mPhysicalCentreX, and toAlgorithmUnits().

**2.2.2.47 toAlgorithmY()**

```
double Configuration::toAlgorithmY (
    const double & aPhysicalY ) const [inline]
```

Utility function to convert a physical y-coordinate to a normalized algorithm y-coordinate.

**Parameters**

<i>aPhysicalY</i>	A physical y-coordinate
-------------------	-------------------------



**Returns**

A normalized y-coordinate

Definition at line 296 of file Configuration.hpp.

References `mPhysicalCentreY`, and `toAlgorithmUnits()`.

**2.2.2.48 toPhysicalUnits()**

```
double Configuration::toPhysicalUnits (
    const double & aAlgorithmUnits ) const [inline]
```

Utility function to convert a normalized algorithm distance to physical distance.

**Parameters**

<i>aAlgorithmUnits</i>	A normalized algorithm distance
------------------------	---------------------------------

**Returns**

A physical distances

Definition at line 256 of file Configuration.hpp.

References `mScale`.

Referenced by `SetRBins()`, `SetTBins()`, `toPhysicalX()`, `toPhysicalY()`, and `Event::WriteCSV()`.

**2.2.2.49 toPhysicalX()**

```
double Configuration::toPhysicalX (
    const double & aAlgorithmX ) const [inline]
```

Utility function to convert a normalized algorithm x-coordinate to a physical x-coordinate.

**Parameters**

<i>aAlgorithmX</i>	A normalized x-coordinate
--------------------	---------------------------

**Returns**

A physical x-coordinate

Definition at line 272 of file Configuration.hpp.

References `mPhysicalCentreX`, and `toPhysicalUnits()`.

#### 2.2.2.50 `toPhysicalY()`

```
double Configuration::toPhysicalY (
    const double & aAlgorithmY ) const [inline]
```

Utility function to convert a normalized algorithm y-coordinate to a physical y-coordinate.

##### Parameters

<i>aAlgorithmY</i>	A normalized y-coordinate
--------------------	---------------------------

##### Returns

A physical y-coordinate

Definition at line 288 of file Configuration.hpp.

References `mPhysicalCentreY`, and `toPhysicalUnits()`.

Referenced by `Event::WriteCSV()`.

#### 2.2.2.51 `validate()`

```
const bool& Configuration::validate ( ) const [inline]
```

Getter for whether or not to run the validation on the clustering.

##### Returns

Whether or not to run the validation on the clustering

Definition at line 234 of file Configuration.hpp.

References `mValidate`.

The documentation for this class was generated from the following files:


- `include/BayesianClustering/Configuration.hpp`
- `src/BayesianClustering/Configuration.cpp`
- `src/BayesianClustering/Event.cpp`

## 2.3 Data Class Reference

A class to store the raw data-points.

```
#include <Data.hpp>
```

Collaboration diagram for Data:



### Public Member Functions

- [Data](#) (const PRECISION &aX, const PRECISION &aY, const PRECISION &aS)  
*Constructor.*
- [Data](#) (const [Data](#) &aOther)=delete  
*Deleted copy constructor.*
- [Data](#) & [operator=](#) (const [Data](#) &aOther)=delete  
*Deleted assignment operator.*
- [Data](#) ([Data](#) &&aOther)=default  
*Default move constructor.*
- [Data](#) & [operator=](#) ([Data](#) &&aOther)=default  
*Default move-assignment constructor.*
- virtual ~[Data](#) ()  
*Destructor.*
- bool [operator<](#) (const [Data](#) &aOther) const  
*Comparison operator for sorting data-points by distance from the origin.*
- PRECISION [dR2](#) (const [Data](#) &aOther) const  
*Return the squared-distance of this data-points from another.*
- PRECISION [dR](#) (const [Data](#) &aOther) const  
*Return the distance of this data-points from another.*
- PRECISION [dPhi](#) (const [Data](#) &aOther) const  
*Return the angle between this data-points and another.*
- void [Preprocess](#) (std::vector< [Data](#) > &aData, const std::size\_t &aIndex)  
*All the necessary pre-processing to get this data-point ready for an RT-scan.*
- void [PreprocessLocalizationScores](#) (std::vector< [Data](#) > &aData)
- PRECISION [CalculateLocalizationScore](#) (const std::vector< [Data](#) > &aData, const double &R) const

## Public Attributes

- PRECISION [x](#)  
*The x-position of the data-point.*
- PRECISION [y](#)  
*The y-position of the data-point.*
- PRECISION [s](#)  
*The sigma of the data-point*
- PRECISION [r2](#)  
*The squared radial distance of the data-point.*
- PRECISION [r](#)  
*The radial distance of the data-point.*
- PRECISION [phi](#)  
*The phi-position of the data-point.*
- `std::vector< PRECISION >` [mLocalizationScores](#)  
*The locaalization scores, one per R-bin.*
- `std::vector< std::pair< PRECISION, std::size_t > >` [mNeighbours](#)  
*The list of neighbours as a pair of squared-distance and index into the list of points.*
- [Cluster](#) \* [mProtoCluster](#)  
*A cluster containing only this data-point.*

### 2.3.1 Detailed Description

A class to store the raw data-points.

Definition at line 14 of file Data.hpp.

### 2.3.2 Constructor & Destructor Documentation

#### 2.3.2.1 Data() [1/3]

```
Data::Data (
    const PRECISION & aX,
    const PRECISION & aY,
    const PRECISION & aS )
```

Constructor.

#### Parameters

<a href="#">aX</a>	The x-position of the data-point in algorithm units
<a href="#">aY</a>	The y-position of the data-point in algorithm units
<a href="#">aS</a>	The sigma of the data-point in algorithm units

Definition at line 13 of file Data.cpp.

### 2.3.2.2 Data() [2/3]

```
Data::Data (
    const Data & aOther ) [delete]
```

Deleted copy constructor.

#### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

### 2.3.2.3 Data() [3/3]

```
Data::Data (
    Data && aOther ) [default]
```

Default move constructor.

#### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

## 2.3.3 Member Function Documentation

### 2.3.3.1 dPhi()

```
PRECISION Data::dPhi (
    const Data & aOther ) const [inline]
```

Return the angle between this data-points and another.

#### Returns

The angle between this data-points and another

#### Parameters

<i>aOther</i>	A data-point to compare against
---------------	---------------------------------

Definition at line 68 of file Data.hpp.

References `phi`.

### 2.3.3.2 `dR()`

```
PRECISION Data::dR (  
    const Data & aOther ) const [inline]
```

Return the distance of this data-points from another.

#### Returns

The distance of this data-points from another

#### Parameters

<i>aOther</i>	A data-point to compare against
---------------	---------------------------------

Definition at line 60 of file Data.hpp.

References `dR2()`.

### 2.3.3.3 `dR2()`

```
PRECISION Data::dR2 (  
    const Data & aOther ) const [inline]
```

Return the squared-distance of this data-points from another.

#### Returns

The squared-distance of this data-points from another

#### Parameters

<i>aOther</i>	A data-point to compare against
---------------	---------------------------------

Definition at line 51 of file Data.hpp.

References `x`, and `y`.

Referenced by `dR()`.

#### 2.3.3.4 operator<()

```
bool Data::operator< (
    const Data & aOther ) const [inline]
```

Comparison operator for sorting data-points by distance from the origin.

##### Returns

Whether this data-point is closer to the origin than another

##### Parameters

<i>aOther</i>	A data-point to compare against
---------------	---------------------------------

Definition at line 43 of file Data.hpp.

References r.

#### 2.3.3.5 operator=() [1/2]

```
Data& Data::operator= (
    const Data & aOther ) [delete]
```

Deleted assignment operator.

##### Returns

Reference to this, for chaining calls

##### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

#### 2.3.3.6 operator=() [2/2]

```
Data& Data::operator= (
    Data && aOther ) [default]
```

Default move-assignment constructor.

##### Returns

Reference to this, for chaining calls

## Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

### 2.3.3.7 Preprocess()

```
void Data::Preprocess (
    std::vector< Data > & aData,
    const std::size_t & aIndex )
```

All the necessary pre-processing to get this data-point ready for an RT-scan.

## Parameters

<i>aData</i>	The collection of data-points
<i>aIndex</i>	The index of the current data-point

Definition at line 27 of file Data.cpp.

References Configuration::Instance, and Configuration::max2R().

The documentation for this class was generated from the following files:

- include/BayesianClustering/Data.hpp
- src/BayesianClustering/Data.cpp


## 2.4 DataProxy Class Reference

A light-weight proxy for the raw data-points.

```
#include <DataProxy.hpp>
```



Collaboration diagram for DataProxy:

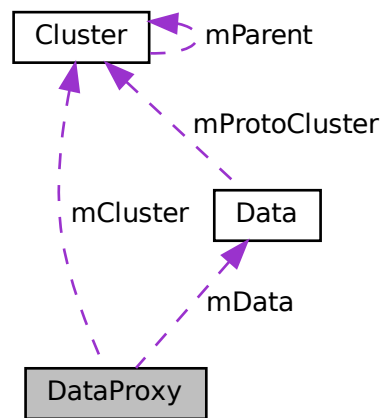

## Public Member Functions

- [DataProxy](#) ([Data](#) &aData)  
*Default constructor.*
- [DataProxy](#) (const [DataProxy](#) &aOther)=delete  
*Deleted copy constructor.*
- [DataProxy](#) & operator= (const [DataProxy](#) &aOther)=delete  
*Deleted assignment operator.*
- [DataProxy](#) ([DataProxy](#) &&aOther)=default  
*Default move constructor.*
- [DataProxy](#) & operator= ([DataProxy](#) &&aOther)=default  
*Default move-assignment constructor.*
- void [Clusterize](#) (const PRECISION &a2R2, [EventProxy](#) &aEvent)  
*Entry point clusterization function - a new cluster will be created.*
- void [Clusterize](#) (const PRECISION &a2R2, [EventProxy](#) &aEvent, [Cluster](#) \*aCluster)  
*Recursive clusterization function.*
- [Cluster](#) \* [GetCluster](#) ()  
*Get a pointer to this data-proxy's ultimate parent cluster (or null if unclustered).*

## Public Attributes

- [Data](#) \* [mData](#)  
*The data-point for which this is the proxy.*
- [Cluster](#) \* [mCluster](#)  
*This data-proxy's immediate parent cluster.*
- bool [mExclude](#)  
*Whether this data-point is to be included in the clusterization.*

### 2.4.1 Detailed Description

A light-weight proxy for the raw data-points.

Definition at line 17 of file DataProxy.hpp.

### 2.4.2 Constructor & Destructor Documentation

#### 2.4.2.1 DataProxy() [1/3]

```
DataProxy::DataProxy (  
    Data & aData )
```

Default constructor.

Parameters

<i>aData</i>	The data-point for which this is the proxy
--------------	--

Definition at line 10 of file DataProxy.cpp.

#### 2.4.2.2 DataProxy() [2/3]

```
DataProxy::DataProxy (  
    const DataProxy & aOther ) [delete]
```

Deleted copy constructor.

Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

#### 2.4.2.3 DataProxy() [3/3]

```
DataProxy::DataProxy (  
    DataProxy && aOther ) [default]
```

Default move constructor.

## Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

## 2.4.3 Member Function Documentation

### 2.4.3.1 Clusterize() [1/2]

```
void DataProxy::Clusterize (
    const PRECISION & a2R2,
    EventProxy & aEvent )
```

Entry point clusterization function - a new cluster will be created.

## Parameters

<i>a2R2</i>	The clusterization radius
<i>aEvent</i>	The event-proxy in which we are running

Definition at line 15 of file DataProxy.cpp.

References mCluster, EventProxy::mClusters, and mExclude.

Referenced by Clusterize().

### 2.4.3.2 Clusterize() [2/2]

```
void DataProxy::Clusterize (
    const PRECISION & a2R2,
    EventProxy & aEvent,
    Cluster * aCluster )
```

Recursive clusterization function.

## Parameters

<i>a2R2</i>	The clusterization radius
<i>aEvent</i>	The event-proxy in which we are running
<i>aCluster</i>	The cluster we are building

Definition at line 23 of file DataProxy.cpp.

References Clusterize(), GetCluster(), EventProxy::GetData(), mCluster, Cluster::mClusterSize, mData, mExclude, Data::mNeighbours, Cluster::mParent, and Data::mProtoCluster.

### 2.4.3.3 GetCluster()

```
Cluster* DataProxy::GetCluster ( ) [inline]
```

Get a pointer to this data-proxy's ultimate parent cluster (or null if unclustered).

#### Returns

A pointer to this data-proxy's ultimate parent cluster

Definition at line 51 of file DataProxy.hpp.

References Cluster::GetParent(), and mCluster.

Referenced by Clusterize().

### 2.4.3.4 operator=() [1/2]

```
DataProxy& DataProxy::operator= (
    const DataProxy & aOther ) [delete]
```

Deleted assignment operator.

#### Returns

Reference to this, for chaining calls

#### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

### 2.4.3.5 operator=() [2/2]

```
DataProxy& DataProxy::operator= (
    DataProxy && aOther ) [default]
```

Default move-assignment constructor.

#### Returns

Reference to this, for chaining calls

## Parameters

<code>aOther</code>	Anonymous argument
---------------------	--------------------

The documentation for this class was generated from the following files:

- include/BayesianClustering/DataProxy.hpp
- src/BayesianClustering/DataProxy.cpp

## 2.5 Event Class Reference

A class which holds the raw event data and global parameters.

```
#include <Event.hpp>
```

### Public Member Functions

- [Event](#) ()  
*Default Constructor.*
- [Event](#) (const [Event](#) &aOther)=delete  
*Deleted copy constructor.*
- [Event](#) & [operator=](#) (const [Event](#) &aOther)=delete  
*Deleted assignment operator.*
- [Event](#) ([Event](#) &&aOther)=default  
*Default move constructor.*
- [Event](#) & [operator=](#) ([Event](#) &&aOther)=default  
*Default move-assignment constructor.*
- void [Preprocess](#) ()  
*All the necessary pre-processing to get the event ready for an RT-scan.*
- void [ScanRT](#) (const std::function< void(const [EventProxy](#) &, const double &, const double &, std::pair< int, int >) > &aCallback)  
*Run the scan.*
- void [Clusterize](#) (const double &R, const double &T, const std::function< void(const [EventProxy](#) &) > &aCallback)  
*Run clusterization for a specific choice of R and T.*
- void [LoadCSV](#) (const std::string &aFilename)  
*Load an event from given file.*
- void [WriteCSV](#) (const std::string &aFilename)  
*Save an event to a file.*

### Public Attributes

- std::vector< [Data](#) > [mData](#)  
*The collection of raw data points.*

## 2.5.1 Detailed Description

A class which holds the raw event data and global parameters.

Definition at line 16 of file Event.hpp.

## 2.5.2 Constructor & Destructor Documentation

### 2.5.2.1 Event() [1/2]

```
Event::Event (
    const Event & aOther ) [delete]
```

Deleted copy constructor.

Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

### 2.5.2.2 Event() [2/2]

```
Event::Event (
    Event && aOther ) [default]
```

Default move constructor.

Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

## 2.5.3 Member Function Documentation

### 2.5.3.1 Clusterize()

```
void Event::Clusterize (
    const double & R,
    const double & T,
    const std::function< void(const EventProxy &) > & aCallback )
```

Run clusterization for a specific choice of R and T.

## Parameters

<i>R</i>	The R parameter for clusterization
<i>T</i>	The T parameter for clusterization
<i>aCallback</i>	A callback for the clusterization results

Definition at line 49 of file Event.cpp.

References EventProxy::Clusterize(), and Preprocess().

### 2.5.3.2 LoadCSV()

```
void Event::LoadCSV (
    const std::string & aFilename )
```

Load an event from given file.

## Parameters

<i>aFilename</i>	The name of the file to load
------------------	------------------------------

Definition at line 106 of file Event.cpp.

References mData.

Referenced by Event().

### 2.5.3.3 operator=() [1/2]

```
Event& Event::operator= (
    const Event & aOther ) [delete]
```

Deleted assignment operator.

## Returns

Reference to this, for chaining calls

## Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

#### 2.5.3.4 operator=() [2/2]

```
Event& Event::operator= (
    Event && aOther ) [default]
```

Default move-assignment constructor.

##### Returns

Reference to this, for chaining calls

##### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

#### 2.5.3.5 ScanRT()

```
void Event::ScanRT (
    const std::function< void(const EventProxy &, const double &, const double &,
std::pair< int, int >) > & aCallback )
```

Run the scan.

##### Parameters

<i>aCallback</i>	A callback for each RT-scan result
------------------	------------------------------------

Definition at line 33 of file Event.cpp.

References mData, and Preprocess().

#### 2.5.3.6 WriteCSV()

```
void Event::WriteCSV (
    const std::string & aFilename )
```

Save an event to a file.

##### Parameters

<i>aFilename</i>	The name of the file to which to save
------------------	---------------------------------------

Definition at line 144 of file Event.cpp.

References Configuration::Instance, mData, Configuration::toPhysicalUnits(), and Configuration::toPhysicalY().



The documentation for this class was generated from the following files:


- include/BayesianClustering/Event.hpp
- src/BayesianClustering/Event.cpp

## 2.6 EventProxy Class Reference

A lightweight wrapper for the event to store clusters for a given scan.

```
#include <EventProxy.hpp>
```

Collaboration diagram for EventProxy:



### Public Member Functions

- [EventProxy](#) ([Event](#) &aEvent)  
*Default constructor.*
- [EventProxy](#) (const [EventProxy](#) &aOther)=delete  
*Deleted copy constructor.*
- [EventProxy](#) & operator= (const [EventProxy](#) &aOther)=delete  
*Deleted assignment operator.*
- [EventProxy](#) ([EventProxy](#) &&aOther)=default  
*Default move constructor.*
- [EventProxy](#) & operator= ([EventProxy](#) &&aOther)=default  
*Default move-assignment constructor.*
- void [CheckClusterization](#) (const double &R, const double &T)  
*Run validation tests on the clusters.*
- void [ScanRT](#) (const std::function< void(const [EventProxy](#) &, const double &, const double &, std::pair< int, int >) > &aCallback, const uint8\_t &aParallelization=1, const uint8\_t &aOffset=0)  
*Run an RT-scan.*
- void [Clusterize](#) (const double &R, const double &T, const std::function< void(const [EventProxy](#) &) > &aCallback)  
*Run clusterization for a specific choice of R and T.*
- void [UpdateLogScore](#) ()  
*Update log-probability after a scan.*
- void [ValidateLogScore](#) ()
- [DataProxy](#) & [GetData](#) (const std::size\_t &aIndex)  
*Get the proxy for the Nth neighbour of this data-point.*

## Public Attributes

- `std::vector< DataProxy > mData`  
*The collection of lightweight data-point wrappers used by this event wrapper.*
- `std::vector< Cluster > mClusters`  
*The collection of clusters found by this scan.*
- `std::size_t mClusteredCount`  
*The number of clustered data-points.*
- `std::size_t mBackgroundCount`  
*The number of background data-points.*
- `std::size_t mClusterCount`  
*The number of non-Null clusters.*
- `double mLogP`  
*The log-probability density associated with the last scan.*

## Private Attributes

- `const Event & mEvent`

### 2.6.1 Detailed Description

A lightweight wrapper for the event to store clusters for a given scan.

Definition at line 16 of file EventProxy.hpp.

### 2.6.2 Constructor & Destructor Documentation

#### 2.6.2.1 EventProxy() [1/3]

```
EventProxy::EventProxy (
    Event & aEvent )
```

Default constructor.

#### Parameters

<code>aEvent</code>	An event for which this is a lightweight proxy
---------------------	--

Definition at line 17 of file EventProxy.cpp.

References `mClusters`, `Event::mData`, and `mData`.

### 2.6.2.2 EventProxy() [2/3]

```
EventProxy::EventProxy (
    const EventProxy & aOther ) [delete]
```

Deleted copy constructor.

#### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

### 2.6.2.3 EventProxy() [3/3]

```
EventProxy::EventProxy (
    EventProxy && aOther ) [default]
```

Default move constructor.

#### Parameters

<i>aOther</i>	Anonymous argument
---------------	--------------------

## 2.6.3 Member Function Documentation

### 2.6.3.1 CheckClusterization()

```
void EventProxy::CheckClusterization (
    const double & R,
    const double & T )
```

Run validation tests on the clusters.

#### Parameters

<i>R</i>	The R of the last run scan
<i>T</i>	The T of the last run scan

Definition at line 25 of file EventProxy.cpp.

References GetData(), mBackgroundCount, mClusterCount, mClusters, and mData.

### 2.6.3.2 Clusterize()

```
void EventProxy::Clusterize (
    const double & R,
    const double & T,
    const std::function< void(const EventProxy &) > & aCallback )
```

Run clusterization for a specific choice of R and T.

#### Parameters

<i>R</i>	The R parameter for clusterization
<i>T</i>	The T parameter for clusterization
<i>aCallback</i>	A callback for the clusterization results

Definition at line 135 of file EventProxy.cpp.

References mClusters, Event::mData, mData, and UpdateLogScore().

Referenced by Event::Clusterize().

### 2.6.3.3 GetData()

```
DataProxy& EventProxy::GetData (
    const std::size_t & aIndex ) [inline]
```

Get the proxy for the Nth neighbour of this data-point.

#### Returns

A reference to the neighbour data-proxy

#### Parameters

<i>aIndex</i>	The index of the neighbour we are looking for
---------------	---

Definition at line 61 of file EventProxy.hpp.

References mData.

Referenced by CheckClusterization(), and DataProxy::Clusterize().

### 2.6.3.4 operator=() [1/2]

```
EventProxy& EventProxy::operator= (
    const EventProxy & aOther ) [delete]
```

Deleted assignment operator.

**Returns**

Reference to this, for chaining calls

**Parameters**

<i>aOther</i>	Anonymous argument
---------------	--------------------

**2.6.3.5 operator=() [2/2]**

```
EventProxy& EventProxy::operator= (
    EventProxy && aOther ) [default]
```

Default move-assignment constructor.

**Returns**

Reference to this, for chaining calls

**Parameters**

<i>aOther</i>	Anonymous argument
---------------	--------------------

**2.6.3.6 ScanRT()**

```
void EventProxy::ScanRT (
    const std::function< void(const EventProxy &, const double &, const double &,
std::pair< int, int >) > & aCallback,
    const uint8_t & aParallelization = 1,
    const uint8_t & aOffset = 0 )
```

Run an RT-scan.

**Parameters**

<i>aCallback</i>	A callback for each RT-scan result
<i>aParallelization</i>	The stride with which we will iterate across RT parameters
<i>aOffset</i>	The starting point for the strides as we iterate across RT parameters

Definition at line 97 of file EventProxy.cpp.

References Configuration::dT(), Configuration::Instance, Configuration::maxScanT(), Configuration::Rbins(), and Configuration::Tbins().

The documentation for this class was generated from the following files:

- include/BayesianClustering/EventProxy.hpp
- src/BayesianClustering/EventProxy.cpp

## 2.7 GSLInterpolator Class Reference

### Public Member Functions

- **GSLInterpolator** (const gsl\_interp\_type \*type, const unsigned int &ndata)
- **GSLInterpolator** (const gsl\_interp\_type \*type, const std::vector< double > &x, const std::vector< double > &y)
- **GSLInterpolator** (const [GSLInterpolator](#) &)=delete
- [GSLInterpolator](#) & **operator=** (const [GSLInterpolator](#) &)=delete
- [GSLInterpolator](#) & **operator=** ([GSLInterpolator](#) &&)=default
- bool **SetData** (const std::vector< double > &x, const std::vector< double > &y)
- bool **SetData** (const unsigned int &ndata, const double \*x, const double \*y)
- double **Evaluate** (const std::function< int(double &) > &aFunction, const std::string &aName)
- double **Eval** (const double &x)
- double **Deriv** (const double &x)
- double **Deriv2** (const double &x)
- double **Integ** (const double &a, const double &b)

### Private Attributes

- unsigned int **nErrors**
- gsl\_interp\_accel \* **fAccel**
- gsl\_spline \* **fSpline**
- const gsl\_interp\_type \* **fInterpType**

### 2.7.1 Detailed Description

Definition at line 17 of file GSLInterpolator.hpp.

The documentation for this class was generated from the following files:

- include/Utilities/GSLInterpolator.hpp
- src/Utilities/GSLInterpolator.cpp

## 2.8 Cluster::Parameter Struct Reference

A struct representing the cluster parameters.

```
#include <Cluster.hpp>
```

## Public Member Functions

- [Parameter](#) ()  
*Default constructor.*
- [Parameter](#) & [operator+=](#) (const [Parameter](#) &aOther)  
*Add another set of parameters to this set.*
- double [log\\_score](#) () const  
*Convert the parameters to a log-probability.*
- double [alt\\_log\\_score](#) () const

## Public Attributes

- PRECISION [A](#)  
*[Parameter A](#) defined in the math.*
- PRECISION [Bx](#)  
*[Parameter Bx](#) defined in the math.*
- PRECISION [By](#)  
*[Parameter By](#) defined in the math.*
- PRECISION [C](#)  
*[Parameter C](#) defined in the math.*
- PRECISION [logF](#)  
*[Parameter logF](#) defined in the math.*
- PRECISION [weightedCentreX](#)  
*weighted centre parameters, used*
- PRECISION [weightedCentreY](#)
- PRECISION [S2](#)

### 2.8.1 Detailed Description

A struct representing the cluster parameters.

Definition at line 19 of file Cluster.hpp.

### 2.8.2 Member Function Documentation

#### 2.8.2.1 [log\\_score\(\)](#)

```
double Cluster::Parameter::log_score ( ) const
```

Convert the parameters to a log-probability.

Returns

the log-probability of this set of cluster parameters

Definition at line 75 of file Cluster.cpp.

#### 2.8.2.2 [operator+=\(\)](#)

```
Cluster::Parameter & Cluster::Parameter::operator+= (
    const Parameter & aOther )
```

Add another set of parameters to this set.

**Parameters**

<i>aOther</i>	Another set of parameters to add to this set
---------------	--

**Returns**

Reference to this, for chaining calls

Definition at line 32 of file Cluster.cpp.

References A, Bx, By, C, and logF.

The documentation for this struct was generated from the following files:

- include/BayesianClustering/Cluster.hpp
- src/BayesianClustering/Cluster.cpp

## 2.9 ProgressBar Struct Reference

A utility progress-bar.

```
#include <ProgressBar.hpp>
```

**Public Member Functions**

- [ProgressBar](#) (const std::string &aLabel, const uint32\_t &aMax)  
*Constructor.*
- virtual [~ProgressBar](#) ()  
*Destructor.*
- void [operator++](#) ()  
*Postfix increment.*
- void [operator++](#) (int aDummy)  
*Prefix increment.*

**Public Attributes**

- float [mBlockSize](#)  
*The size of each increment.*
- float [mNextThreshold](#)  
*The next threshold at which we will write a block to stdout.*
- std::size\_t [mCount](#)  
*The number of times we have incremented.*
- std::chrono::high\_resolution\_clock::time\_point [mStart](#)  
*A timer for end-of-task stats.*



## 2.9.1 Detailed Description

A utility progress-bar.

Definition at line 6 of file ProgressBar.hpp.

## 2.9.2 Constructor & Destructor Documentation

### 2.9.2.1 ProgressBar()

```
ProgressBar::ProgressBar (
    const std::string & aLabel,
    const uint32_t & aMax )
```

Constructor.

#### Parameters

<i>aLabel</i>	A description of the task being timed
<i>aMax</i>	The number of calls equalling 100%

Definition at line 7 of file ProgressBar.cpp.

## 2.9.3 Member Function Documentation

### 2.9.3.1 operator++()

```
void ProgressBar::operator++ (
    int aDummy )
```

Prefix increment.

#### Parameters

<i>aDummy</i>	Anonymous argument
---------------	--------------------

Definition at line 27 of file ProgressBar.cpp.

References operator++().

The documentation for this struct was generated from the following files:

- include/Utilities/ProgressBar.hpp
- src/Utilities/ProgressBar.cpp

## 2.10 ProgressBar2 Struct Reference

A utility code timer.

```
#include <ProgressBar.hpp>
```

### Public Member Functions

- [ProgressBar2](#) (const std::string &aLabel, const uint32\_t &aMax)  
*Constructor.*
- virtual [~ProgressBar2](#) ()  
*Destructor.*
- void [operator++](#) ()  
*Postfix increment.*
- void [operator++](#) (int aDummy)  
*Prefix increment.*

### Public Attributes

- std::chrono::high\_resolution\_clock::time\_point [mStart](#)  
*A timer for end-of-task stats.*

#### 2.10.1 Detailed Description

A utility code timer.

Definition at line 34 of file ProgressBar.hpp.

#### 2.10.2 Constructor & Destructor Documentation

##### 2.10.2.1 ProgressBar2()

```
ProgressBar2::ProgressBar2 (
    const std::string & aLabel,
    const uint32_t & aMax )
```

Constructor.

##### Parameters

<i>aLabel</i>	A description of the task being timed
<i>aMax</i>	The number of calls equalling 100%

Definition at line 32 of file ProgressBar.cpp.

### 2.10.3 Member Function Documentation

#### 2.10.3.1 operator++()

```
void ProgressBar2::operator++ (
    int aDummy )
```

Prefix increment.

##### Parameters

<i>aDummy</i>	Anonymous argument
---------------	--------------------

Definition at line 44 of file ProgressBar.cpp.

References operator++().

The documentation for this struct was generated from the following files:

- include/Utilities/ProgressBar.hpp
- src/Utilities/ProgressBar.cpp

## 2.11 PyIterator< U > Struct Template Reference

### Public Member Functions

- **PyIterator** (const std::vector< U > &aData)
- const U & **next** ()

### Public Attributes

- std::vector< U >::const\_iterator **mlt**
- const std::vector< U >::const\_iterator **mEnd**

#### 2.11.1 Detailed Description

```
template<typename U>
struct PyIterator< U >
```

Definition at line 33 of file PythonBindings.cpp.

The documentation for this struct was generated from the following file:

- src/PythonBindings/PythonBindings.cpp

## 2.12 PyIterator< U \* > Struct Template Reference

### Public Member Functions

- **PyIterator** (const std::vector< U \* > &aData)
- const U & **next** ()

### Public Attributes

- std::vector< U \* >::const\_iterator **mlt**
- const std::vector< U \* >::const\_iterator **mEnd**

### 2.12.1 Detailed Description

```
template<typename U>  
struct PyIterator< U * >
```

Definition at line 53 of file PythonBindings.cpp.

The documentation for this struct was generated from the following file:

- src/PythonBindings/PythonBindings.cpp

# Index

- alpha
  - Configuration, [10](#)
- CheckClusterization
  - EventProxy, [45](#)
- Cluster, [3](#)
  - Cluster, [4](#)
  - GetParent, [4](#)
  - mParams, [5](#)
  - operator+=, [5](#)
- Cluster::Parameter, [48](#)
  - log\_score, [49](#)
  - operator+=, [49](#)
- Clusterize
  - DataProxy, [37](#)
  - Event, [40](#)
  - EventProxy, [45](#)
- ClusterR
  - Configuration, [10](#)
- ClusterT
  - Configuration, [11](#)
- Configuration, [6](#)
  - alpha, [10](#)
  - ClusterR, [10](#)
  - ClusterT, [11](#)
  - dR, [11](#)
  - dT, [11](#)
  - FromCommandline, [12](#)
  - FromVector, [12](#)
  - inputFile, [13](#)
  - log\_probability\_sigma, [13](#)
  - logAlpha, [14](#)
  - logGammaAlpha, [14](#)
  - logPb, [14](#)
  - logPbDagger, [15](#)
  - max2R, [15](#)
  - max2R2, [15](#)
  - maxR, [16](#)
  - maxR2, [16](#)
  - maxScanR, [16](#)
  - maxScanT, [17](#)
  - minScanR, [17](#)
  - minScanT, [17](#)
  - outputFile, [18](#)
  - probability\_sigma, [18](#)
  - Rbins, [19](#)
  - scale2, [19](#)
  - SetAlpha, [19](#)
  - SetCentre, [20](#)
  - SetInputFile, [20](#)
  - SetOutputFile, [20](#)
  - SetPb, [21](#)
  - SetRBins, [21](#)
  - SetSigmaParameters, [22](#)
  - SetTBins, [22](#)
  - SetValidate, [23](#)
  - SetZoom, [23](#)
  - sigmabins, [23](#)
  - sigmabins2, [24](#)
  - sigmacount, [25](#)
  - sigmaspacing, [25](#)
  - Tbins, [25](#)
  - toAlgorithmUnits, [25](#)
  - toAlgorithmX, [26](#)
  - toAlgorithmY, [26](#)
  - toPhysicalUnits, [27](#)
  - toPhysicalX, [27](#)
  - toPhysicalY, [28](#)
  - validate, [28](#)
- Data, [29](#)
  - Data, [30](#), [31](#)
  - dPhi, [31](#)
  - dR, [32](#)
  - dR2, [32](#)
  - operator<, [32](#)
  - operator=, [33](#)
  - Preprocess, [34](#)
- DataProxy, [34](#)
  - Clusterize, [37](#)
  - DataProxy, [36](#)
  - GetCluster, [38](#)
  - operator=, [38](#)
- dPhi
  - Data, [31](#)
- dR
  - Configuration, [11](#)
  - Data, [32](#)
- dR2
  - Data, [32](#)
- dT
  - Configuration, [11](#)
- Event, [39](#)
  - Clusterize, [40](#)
  - Event, [40](#)
  - LoadCSV, [41](#)
  - operator=, [41](#)
  - ScanRT, [42](#)
  - WriteCSV, [42](#)

- EventProxy, 43
  - CheckClusterization, 45
  - Clusterize, 45
  - EventProxy, 44, 45
  - GetData, 46
  - operator=, 46, 47
  - ScanRT, 47
- FromCommandline
  - Configuration, 12
- FromVector
  - Configuration, 12
- GetCluster
  - DataProxy, 38
- GetData
  - EventProxy, 46
- GetParent
  - Cluster, 4
- GSLInterpolator, 48
- inputFile
  - Configuration, 13
- LoadCSV
  - Event, 41
- log\_probability\_sigma
  - Configuration, 13
- log\_score
  - Cluster::Parameter, 49
- logAlpha
  - Configuration, 14
- logGammaAlpha
  - Configuration, 14
- logPb
  - Configuration, 14
- logPbDagger
  - Configuration, 15
- max2R
  - Configuration, 15
- max2R2
  - Configuration, 15
- maxR
  - Configuration, 16
- maxR2
  - Configuration, 16
- maxScanR
  - Configuration, 16
- maxScanT
  - Configuration, 17
- minScanR
  - Configuration, 17
- minScanT
  - Configuration, 17
- mParams
  - Cluster, 5
- operator<
  - Data, 32
- operator++
  - ProgressBar, 51
  - ProgressBar2, 53
- operator+=
  - Cluster, 5
  - Cluster::Parameter, 49
- operator=
  - Data, 33
  - DataProxy, 38
  - Event, 41
  - EventProxy, 46, 47
- outputFile
  - Configuration, 18
- Preprocess
  - Data, 34
- probability\_sigma
  - Configuration, 18
- ProgressBar, 50
  - operator++, 51
  - ProgressBar, 51
- ProgressBar2, 52
  - operator++, 53
  - ProgressBar2, 52
- PyIterator< U >, 53
- PyIterator< U \* >, 54
- Rbins
  - Configuration, 19
- scale2
  - Configuration, 19
- ScanRT
  - Event, 42
  - EventProxy, 47
- SetAlpha
  - Configuration, 19
- SetCentre
  - Configuration, 20
- SetInputFile
  - Configuration, 20
- SetOutputFile
  - Configuration, 20
- SetPb
  - Configuration, 21
- SetRBins
  - Configuration, 21
- SetSigmaParameters
  - Configuration, 22
- SetTBins
  - Configuration, 22
- SetValidate
  - Configuration, 23
- SetZoom
  - Configuration, 23
- sigmabins
  - Configuration, 23
- sigmabins2
  - Configuration, 24

sigmacount  
    Configuration, [25](#)  
sigmaspacing  
    Configuration, [25](#)  
  
Tbins  
    Configuration, [25](#)  
toAlgorithmUnits  
    Configuration, [25](#)  
toAlgorithmX  
    Configuration, [26](#)  
toAlgorithmY  
    Configuration, [26](#)  
toPhysicalUnits  
    Configuration, [27](#)  
toPhysicalX  
    Configuration, [27](#)  
toPhysicalY  
    Configuration, [28](#)  
  
validate  
    Configuration, [28](#)  
  
WriteCSV  
    Event, [42](#)