

```
$ devreport --render
```

tidepool_

A small self-hosted job queue for Node services


```
// Asha Rao, Leo Brandt
```

```
// September 2026
```

```
/tidepool
```

September 2026

\$ How it works

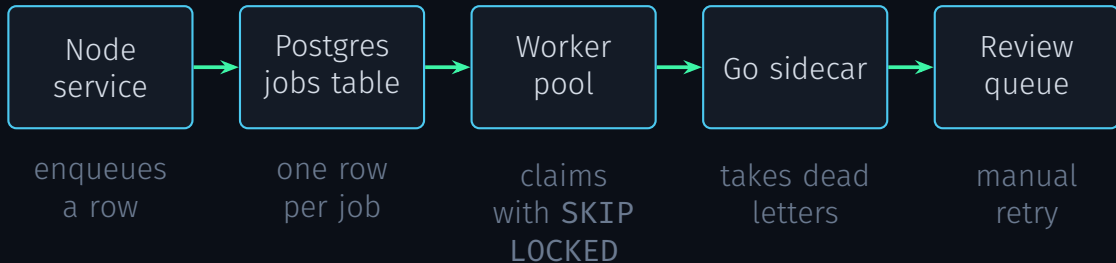

- > Jobs are rows, so two workers never take the same job and no lock server is needed.
- > Failed jobs back off and retry up to five times before the sidecar takes them.


3 / 4

\$ Results after eight weeks


104 ms

P95 ENQUEUE TO START

Down from 212 ms in week one, after tuning the claim query and the index on `run_at`.

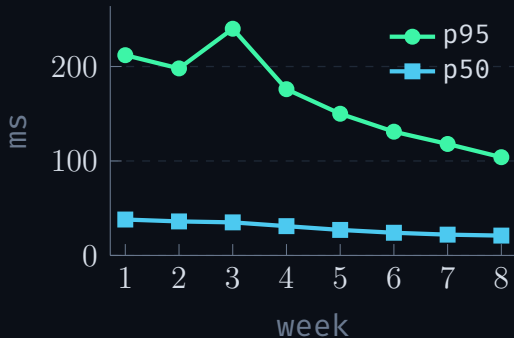

\$ Eight weeks of work

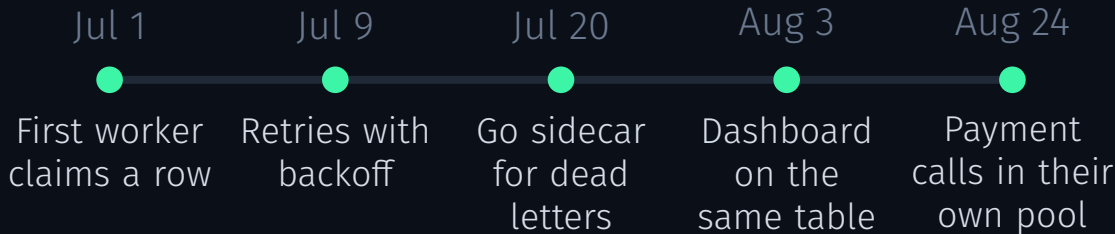

Most failures were timeouts calling a slow payment API. Moving those calls to their own worker pool **removed about half of them.**