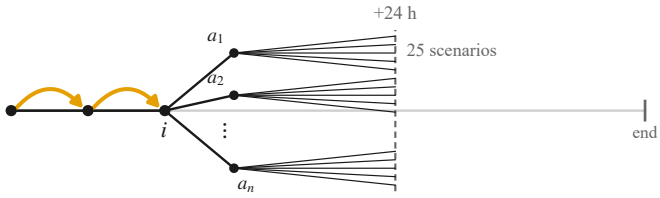
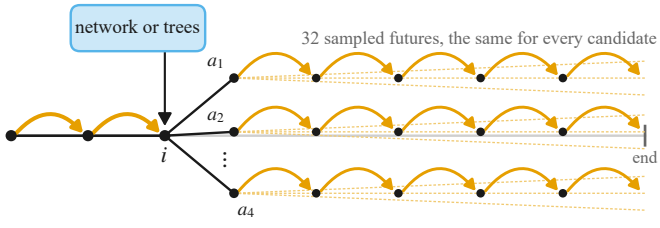
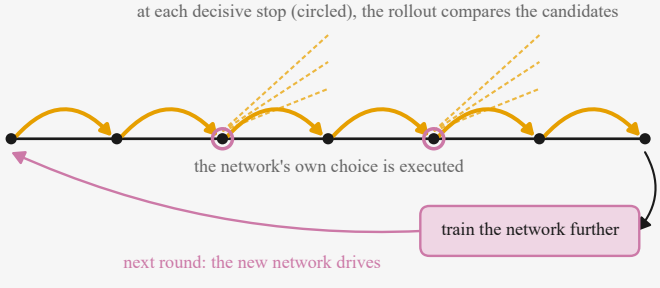
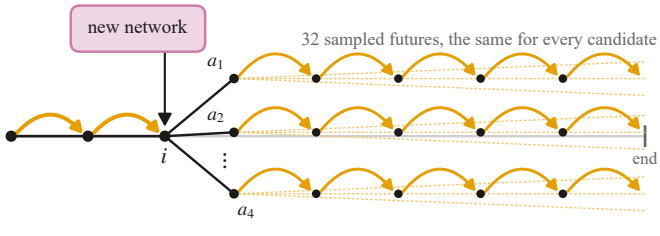
Method	Deciding at stop *i*	What it does
	simulator drives one leg — MILP of one scenario	
Look-ahead (LA) 77 s per stop		For every possible action (about 6), solve one MILP per travel-time scenario, with that scenario's travel times known, up to 24 h ahead. Execute the action with the lowest average cost.
trained on the LA's cost of every action at every stop (639 training routes)		
Network or trees 1.4 ms / 12 ms per stop		Predict, for every possible action, how much more the LA would expect it to cost than the best one, from features of the stop and of the action. A safety filter removes unsafe actions; execute the cheapest one.
+ rollout about 1 s per stop (trees 2 s)		Call the model. If its best actions are close (38% of stops), simulate its 4 best candidates until the end of the route, the model deciding at every simulated stop, and execute the one with the lowest average. Otherwise, the model's choice.
the rollout's comparisons become training labels		
Expert iteration training, 2 rounds 3 h on 32 cores		Each round, the network drives the 639 training routes (2 new travel-time draws). At every decisive stop, the rollout compares its 4 candidates, but the network's own choice is executed. Its cost model is then trained further on the comparisons of all rounds so far.
after 2 rounds: the new network		
Network after expert iteration 1.4 ms per stop		As the network above, with the cost model trained further by expert iteration.
+ rollout about 1 s per stop		As the rollout above, with the new network choosing the candidates and deciding at every simulated stop.