

50-Agent Village Benchmark

Scenario: 50_agent_village_week

Agents: 50

Duration: 7 days

Ticks: 42

Actions: 2100

Relationship edges: 100

Deterministic seed: 20260418


This report uses deterministic local decisions so committed artifacts can be regenerated bit-for-bit.

Actions Per Tick


actions

tick

Action Mix

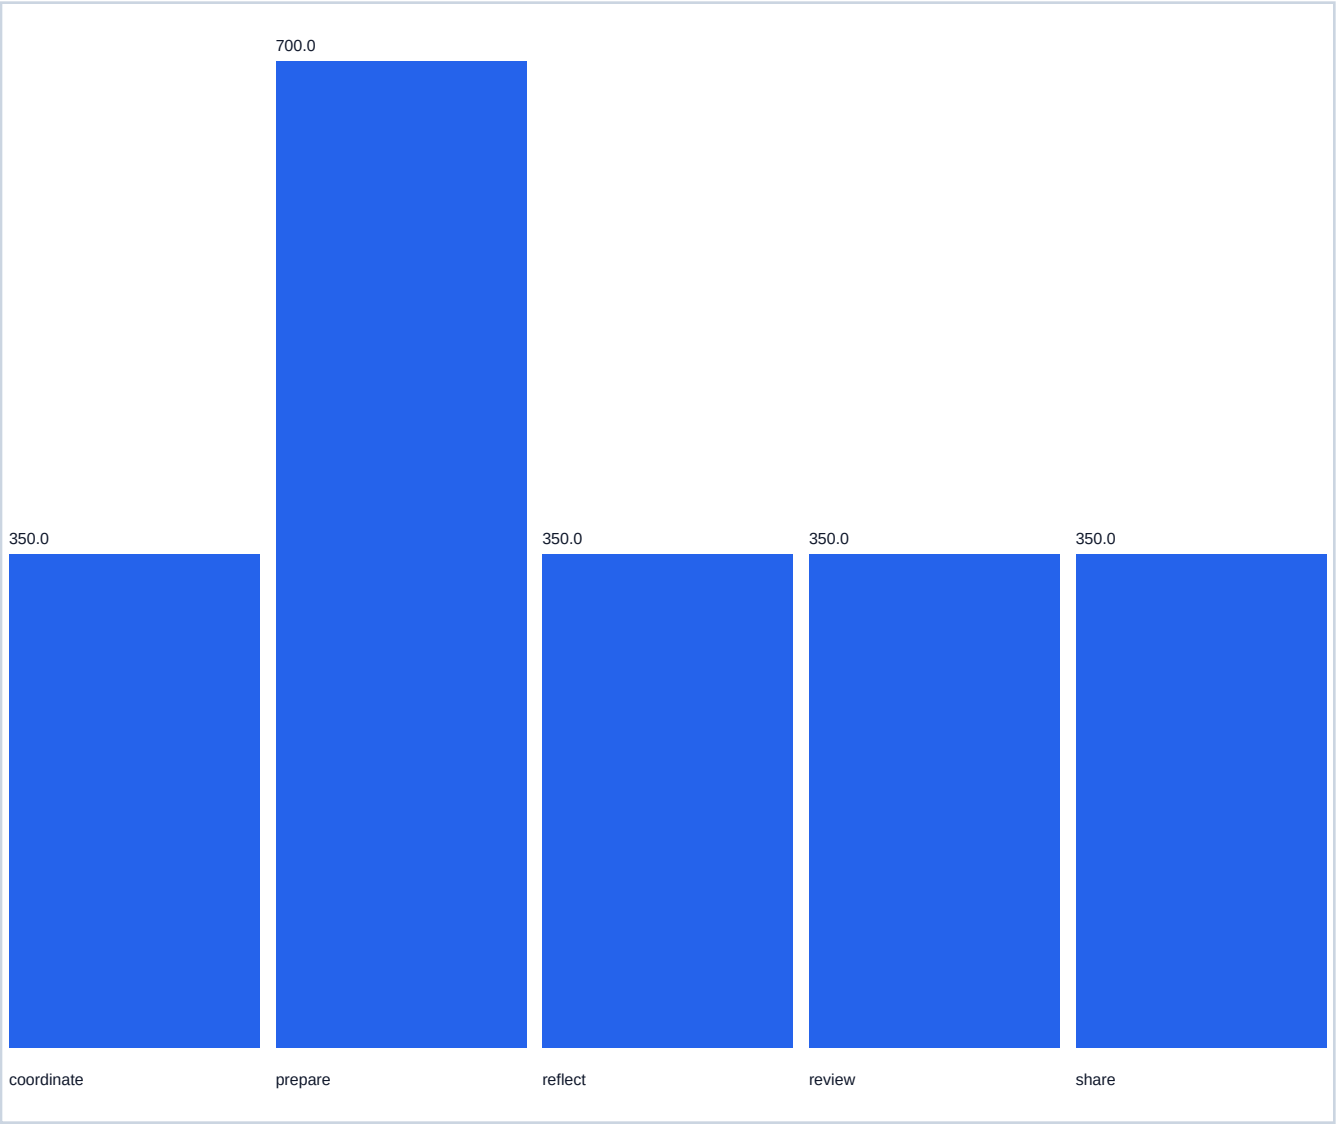


Agent Action Distribution

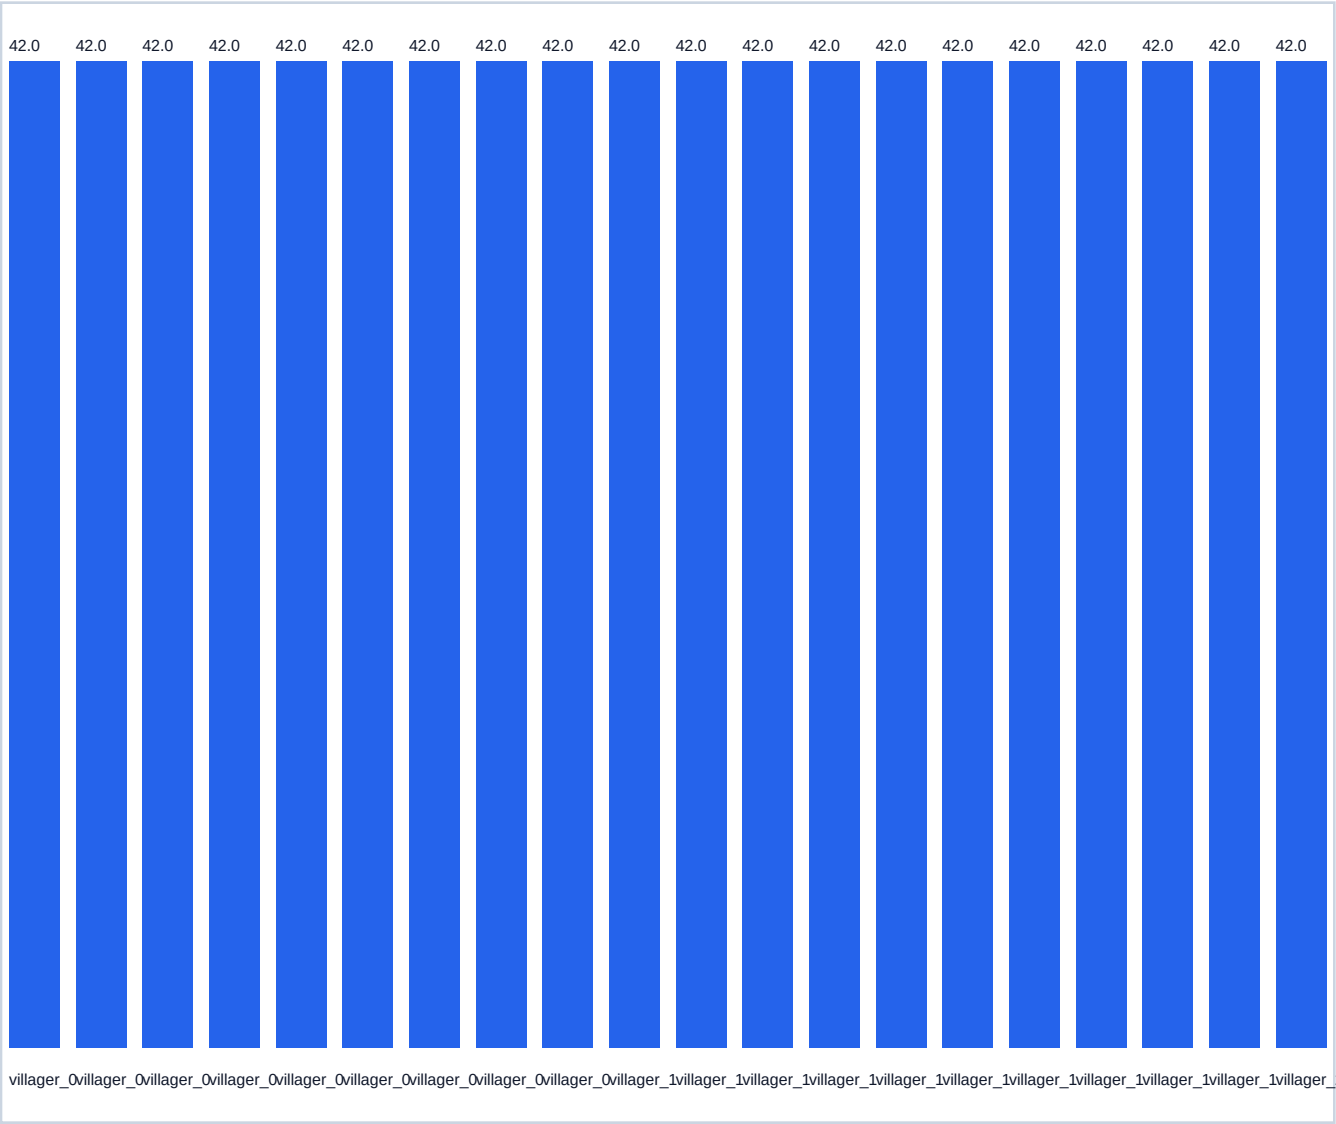

First 20 agents shown; all 50 agents have equal scheduled participation.


Relationship Growth

edges

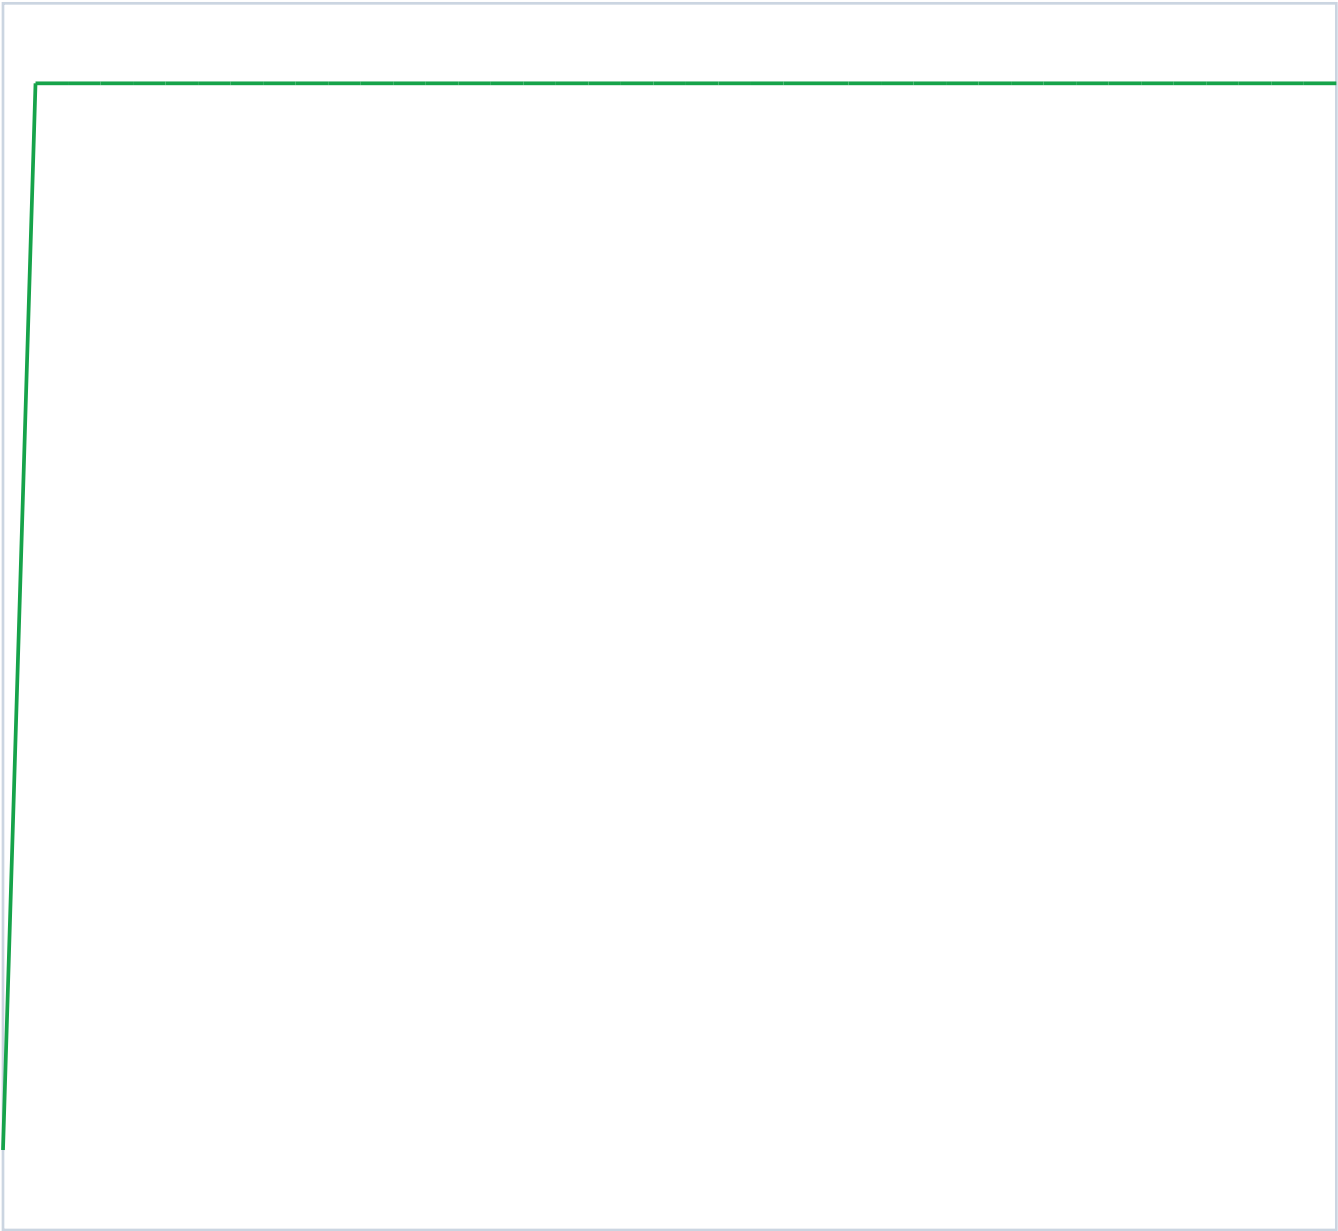


tick

Latency Model Percentiles

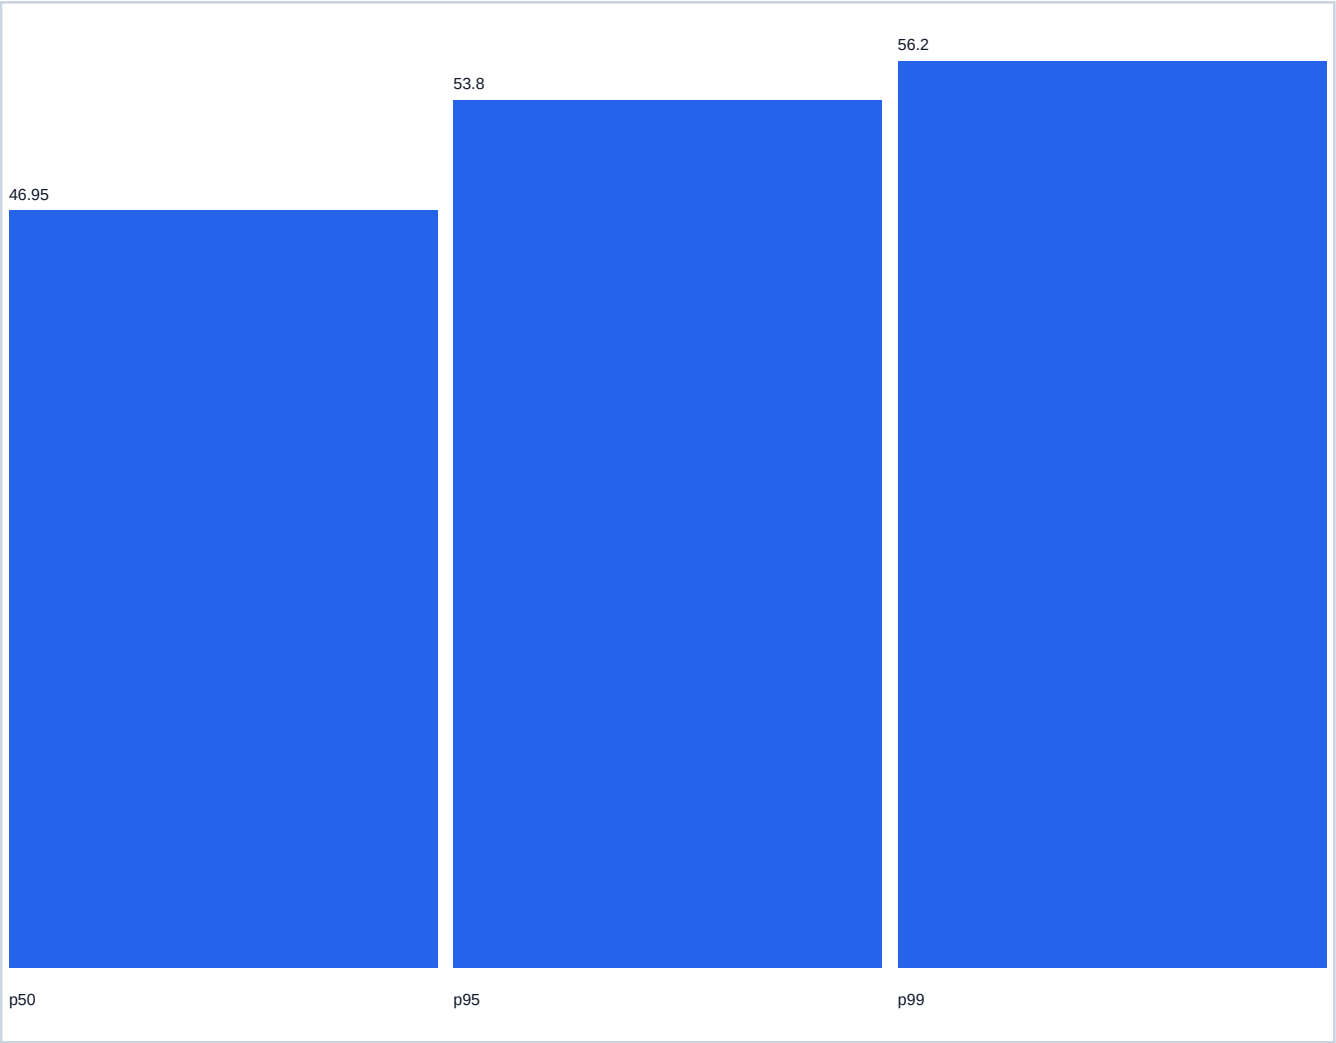

Latency values are deterministic model values for reproducible reporting.

Token and Cost Estimate

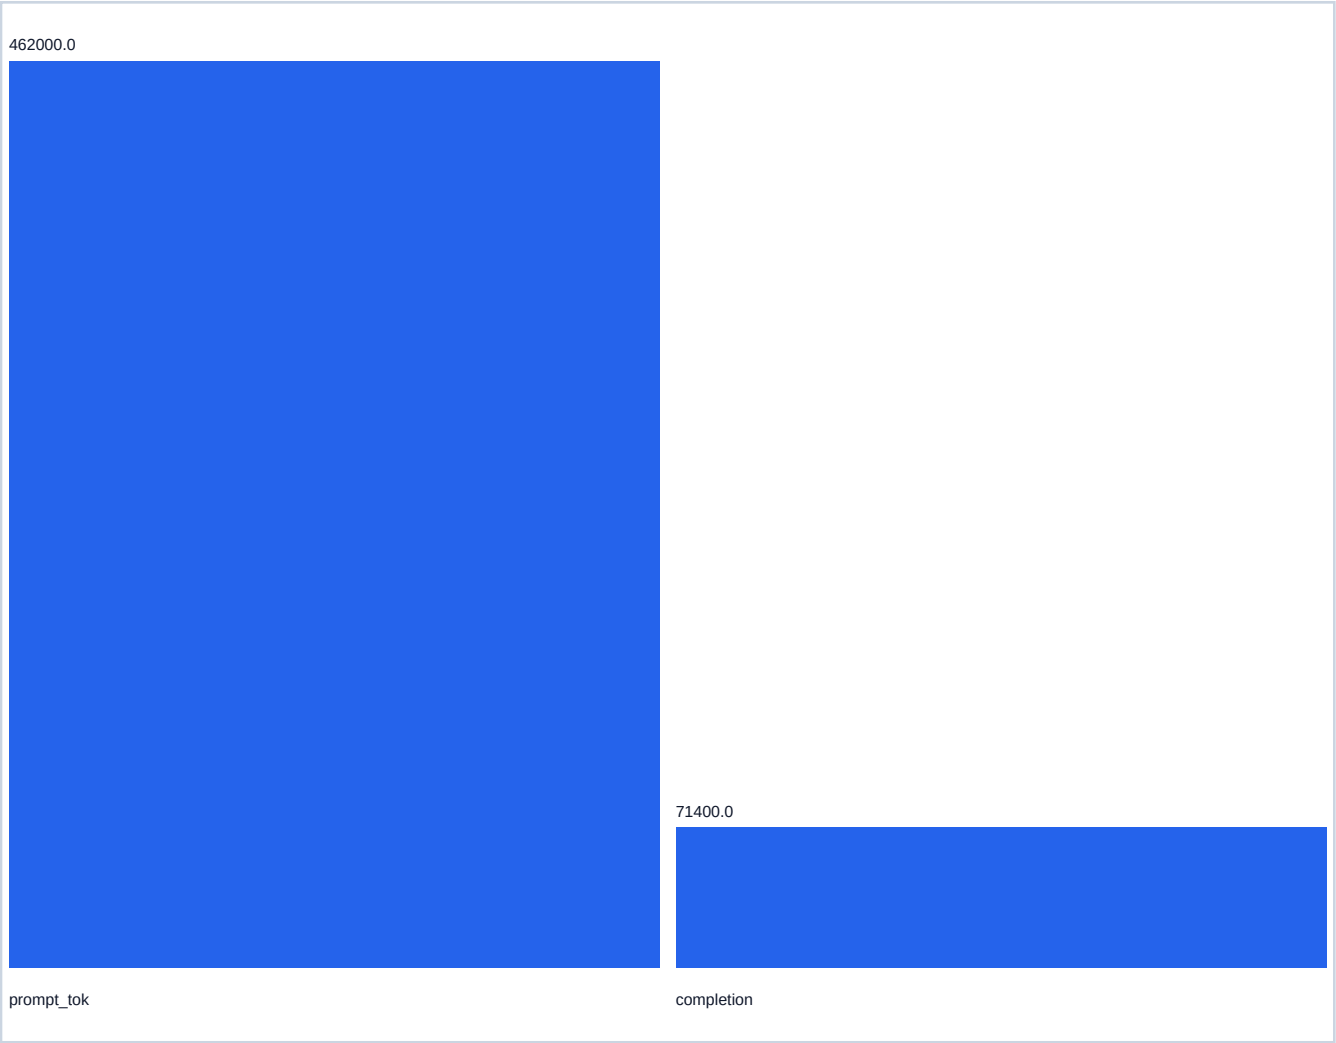

Local replay cost: \$0.00

Trace Sample

00 villager_01 prepare -> None: villager_01 checks the baker station and records a morning priority.
00 villager_02 prepare -> None: villager_02 checks the harbor mechanic station and records a morning priority.
00 villager_03 prepare -> None: villager_03 checks the teacher station and records a morning priority.
00 villager_04 prepare -> None: villager_04 checks the grocer station and records a morning priority.
00 villager_05 prepare -> None: villager_05 checks the retired nurse station and records a morning priority.
00 villager_06 prepare -> None: villager_06 checks the courier station and records a morning priority.
00 villager_07 prepare -> None: villager_07 checks the carpenter station and records a morning priority.
00 villager_08 prepare -> None: villager_08 checks the musician station and records a morning priority.
00 villager_09 prepare -> None: villager_09 checks the clerk station and records a morning priority.
00 villager_10 prepare -> None: villager_10 checks the organizer station and records a morning priority.
00 villager_11 prepare -> None: villager_11 checks the fisher station and records a morning priority.
00 villager_12 prepare -> None: villager_12 checks the apprentice potter station and records a morning priorit
00 villager_13 prepare -> None: villager_13 checks the herbalist station and records a morning priority.
00 villager_14 prepare -> None: villager_14 checks the bridge keeper station and records a morning priority.
00 villager_15 prepare -> None: villager_15 checks the weaver station and records a morning priority.
00 villager_16 prepare -> None: villager_16 checks the well engineer station and records a morning priority.
00 villager_17 prepare -> None: villager_17 checks the archivist station and records a morning priority.
00 villager_18 prepare -> None: villager_18 checks the elder councilor station and records a morning priority.
00 villager_19 prepare -> None: villager_19 checks the stable hand station and records a morning priority.
00 villager_20 prepare -> None: villager_20 checks the miller station and records a morning priority.
00 villager_21 prepare -> None: villager_21 checks the lantern maker station and records a morning priority.
00 villager_22 prepare -> None: villager_22 checks the boatwright station and records a morning priority.

Reproducibility

Artifacts are deterministic for the same config and seed.

sim_log.jsonl SHA-256: ba713ea40e6eaec5ef4b5444e2421c8a0d41b5f4910dc4f3c50456ea18c74e37

trace_sample.json SHA-256: 26b4d92a0d4cbc2717cbd349cab3f5dfa2f9b7afd6fb1087a714f73b23486915

config fingerprint: 42b69bf02c25881ce9084c4a99756db4e1114e646117c45b7621012876362275

bit-for-bit artifacts: True

Interpretation and Next Steps

1. The 50-agent run exercises the same public Simulator path used by notebooks and CLI demos.
2. Relationship edges remain explicit and inspectable instead of being hidden inside prompts.
3. The JSONL log can be replayed, sampled, or loaded into the dashboard for offline review.
4. Next milestone: compare 5, 10, 25, and 50-agent curves across multiple LLM providers.
5. Next milestone: add reproducibility tests that restore state from JSONL logs.