

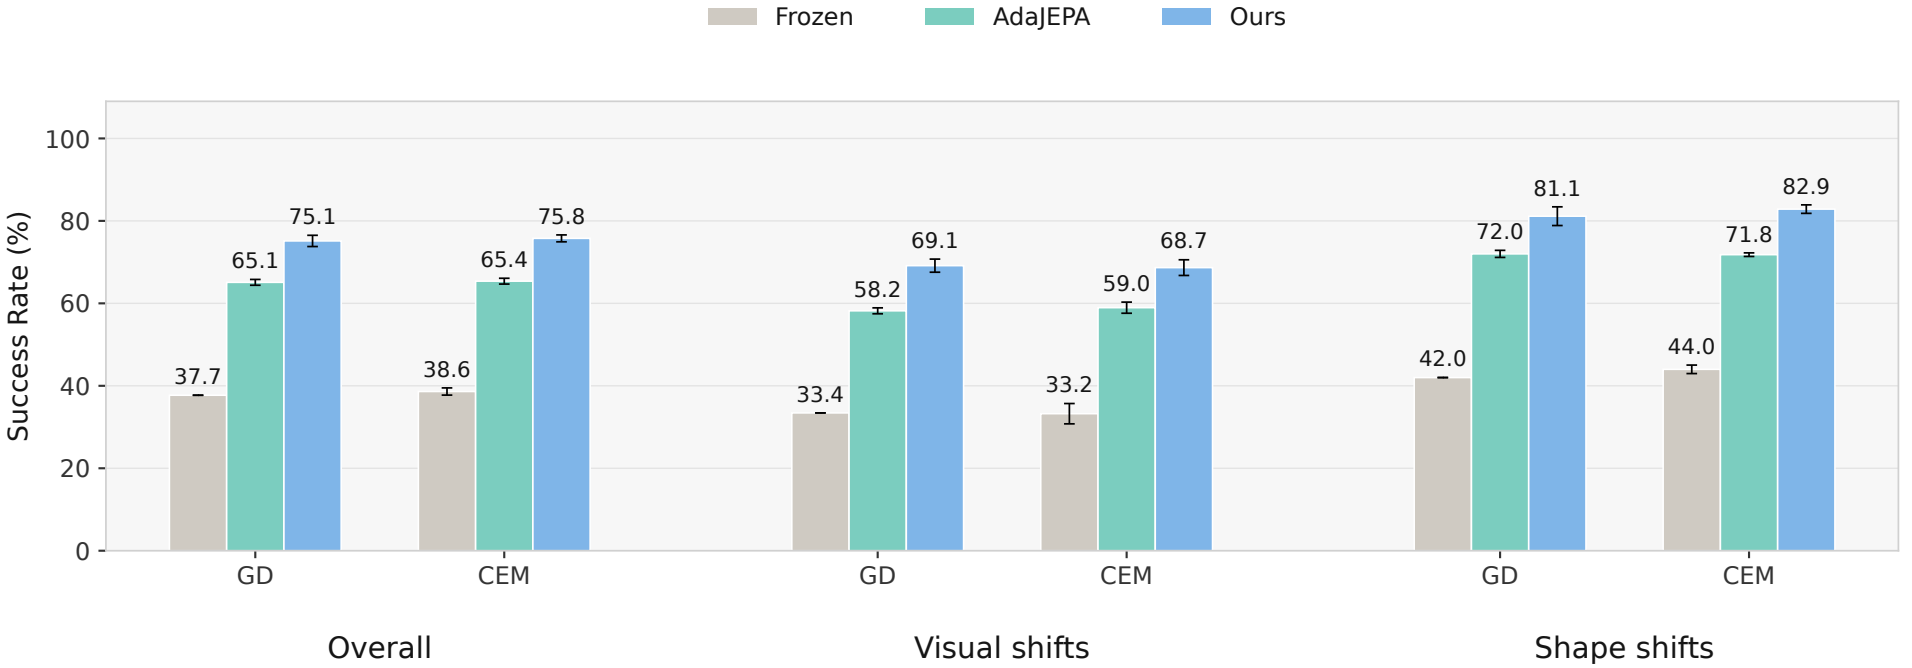



Ours: round 5; three chains. Baselines: three seeds. Error bars: +/- 1 SD.

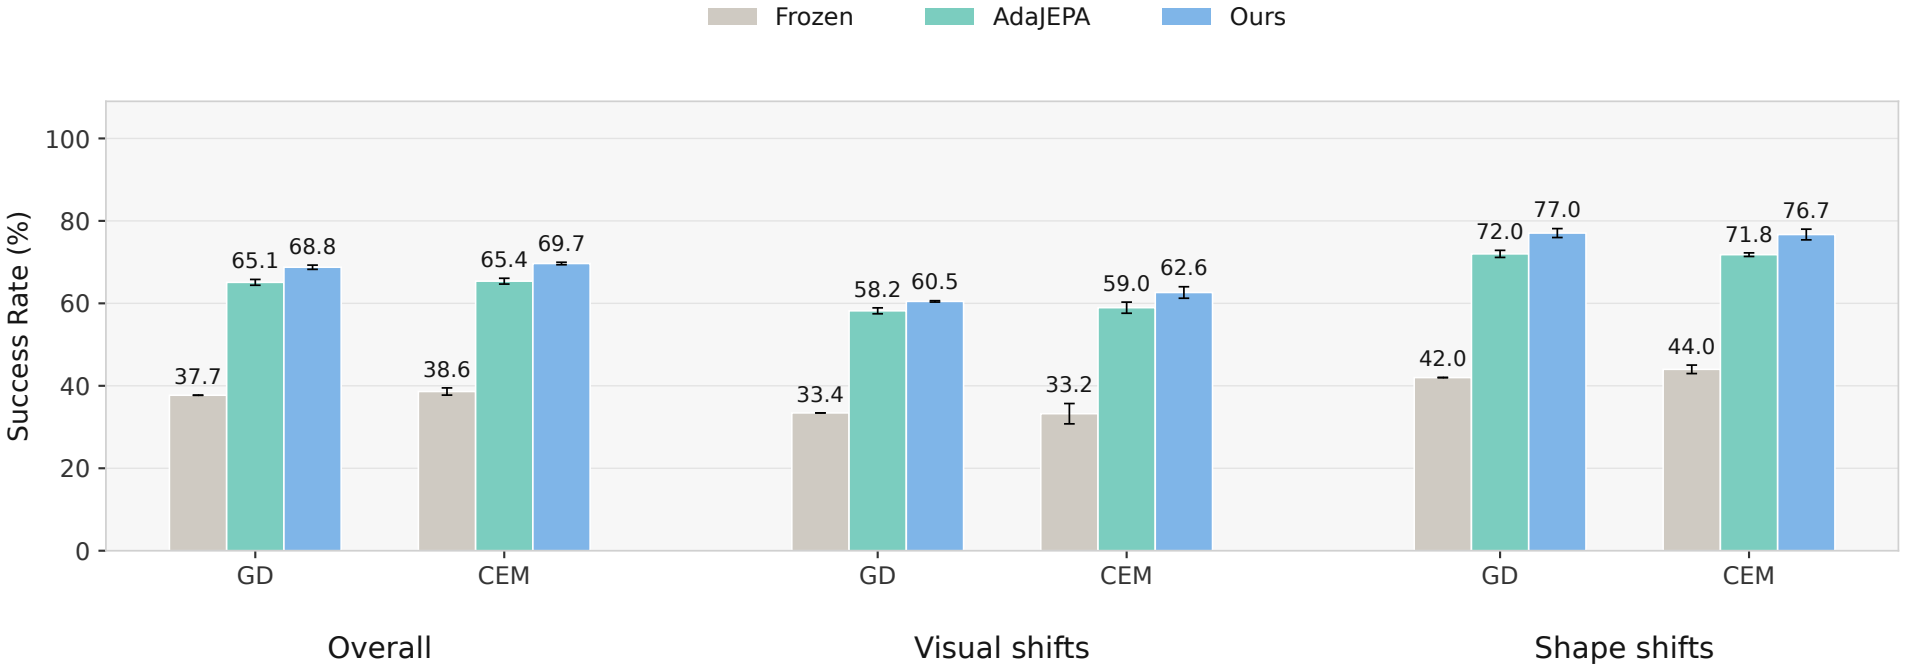

Ours: rounds 1-3 pooled; three chains. Baselines: three seeds. Error bars: +/- 1 SD.

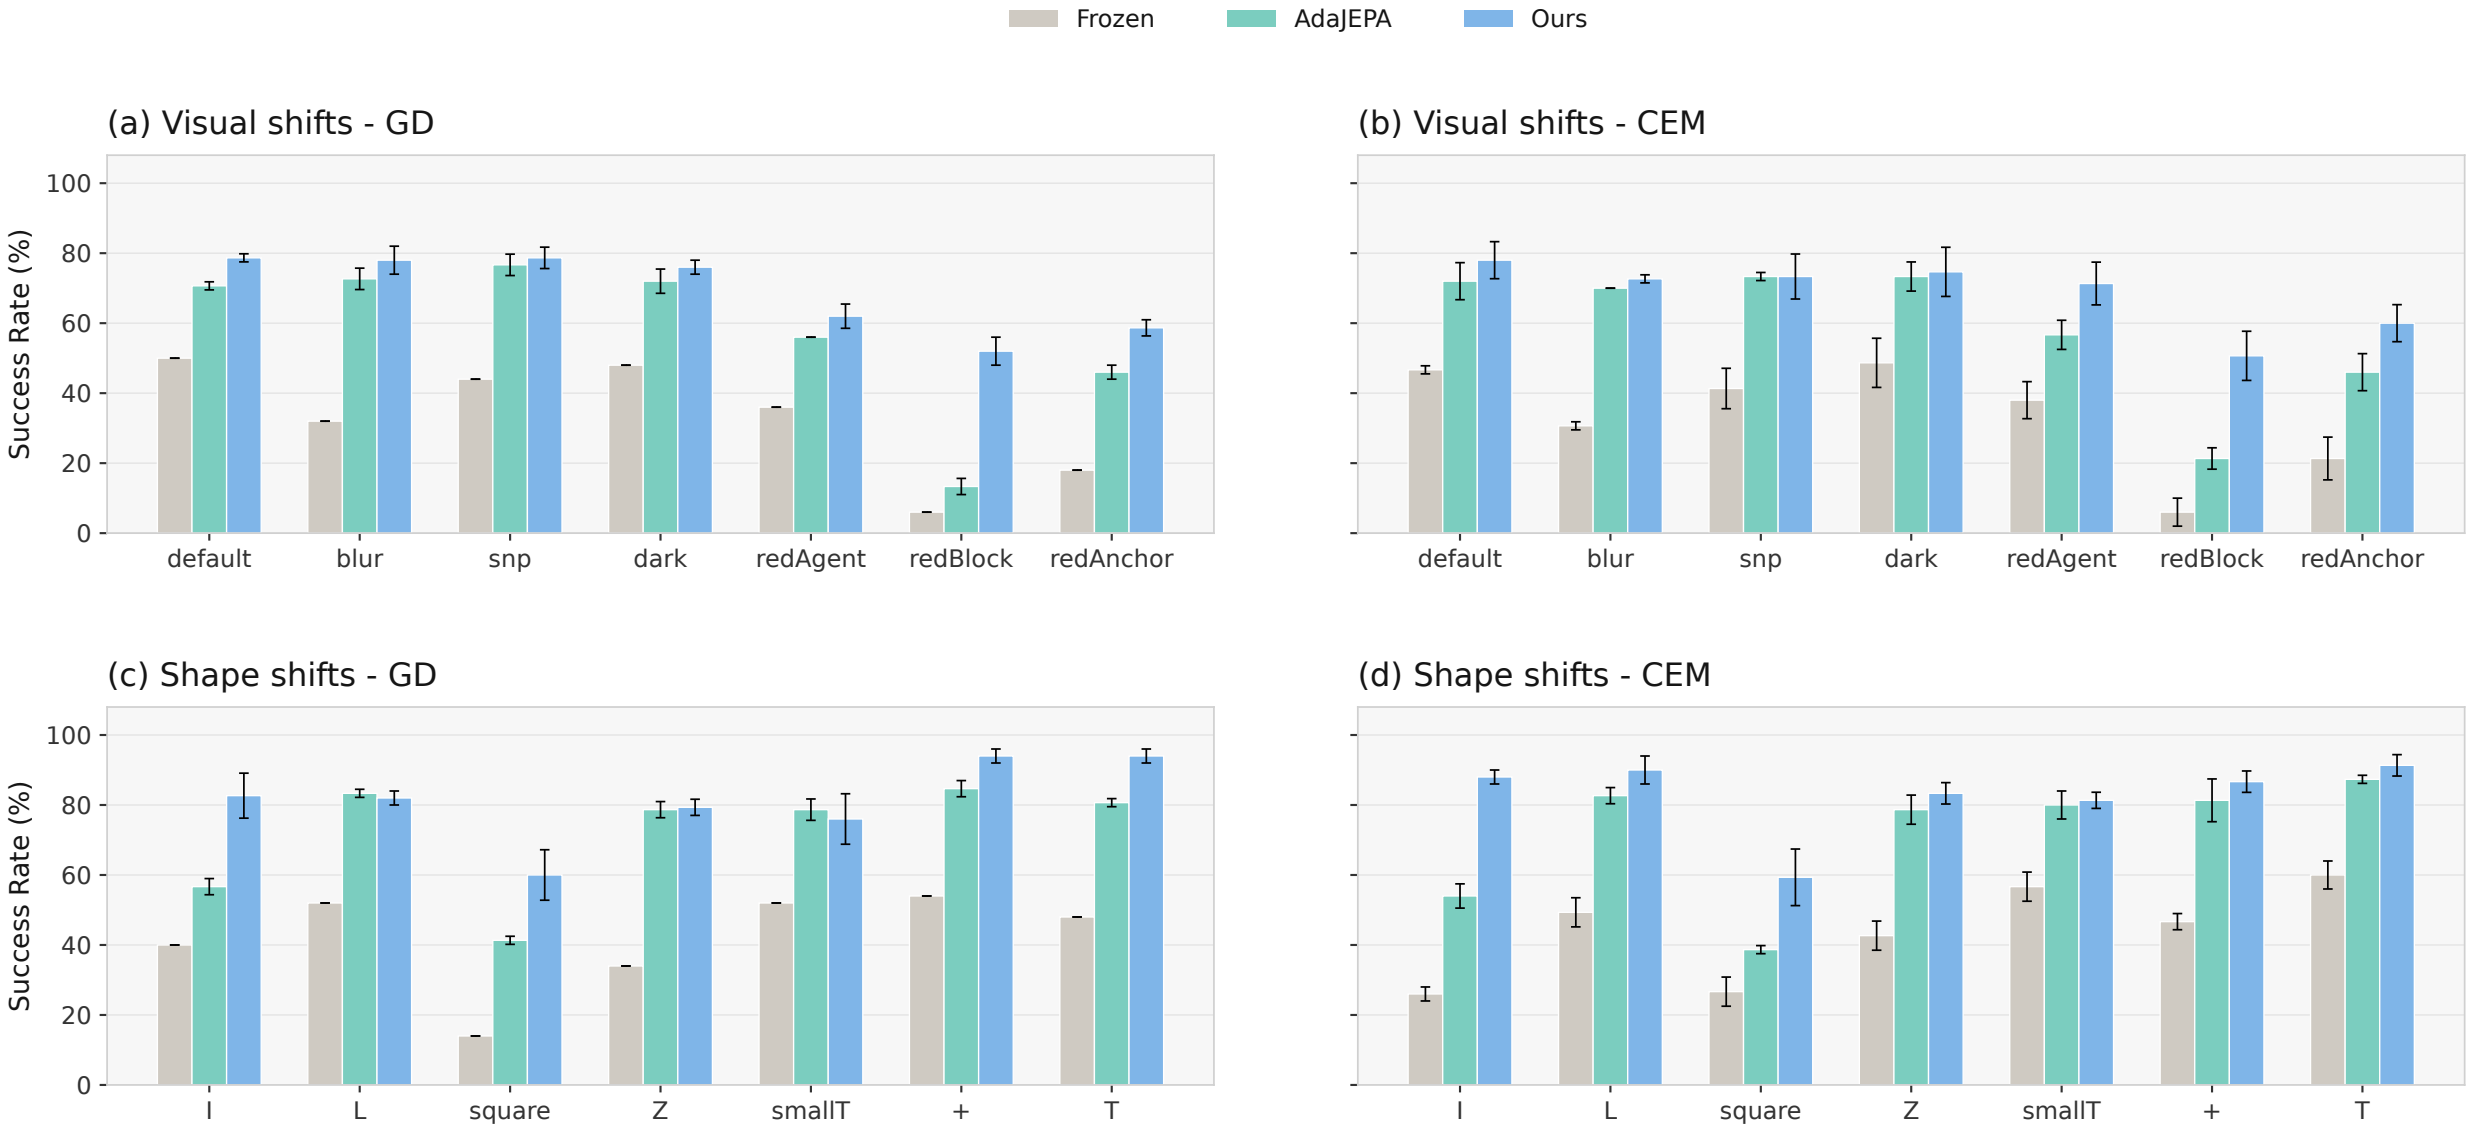


Round 5; mean +/- 1 SD. Seven visual conditions and seven shape conditions, evaluated as 14 separate domains.

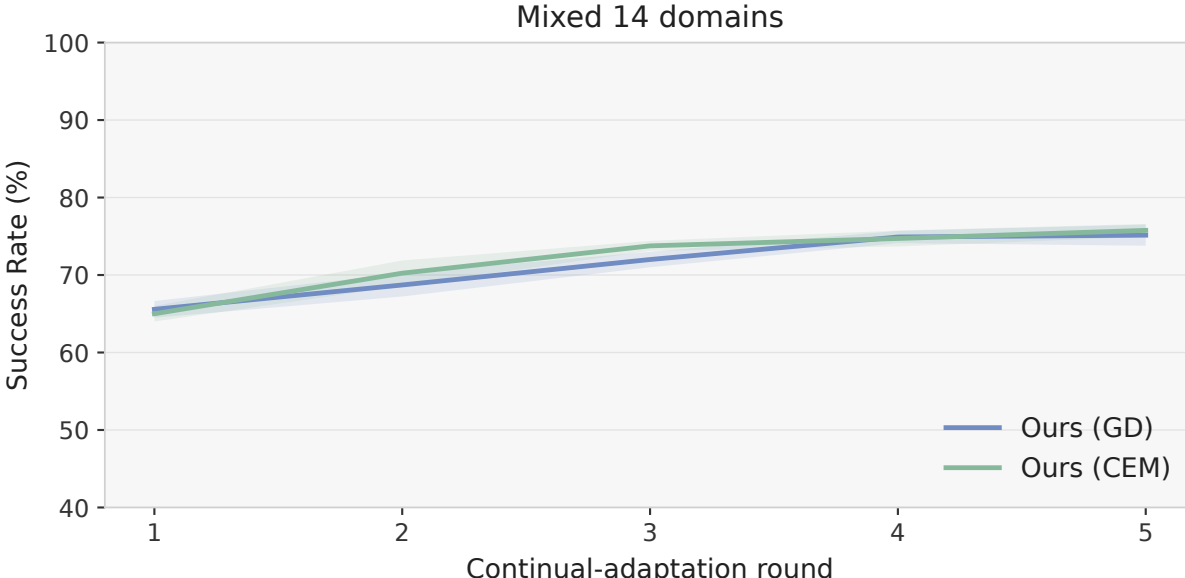

Historical mixed-14 learning results, unchanged.


Original means and sample SD across three chains.

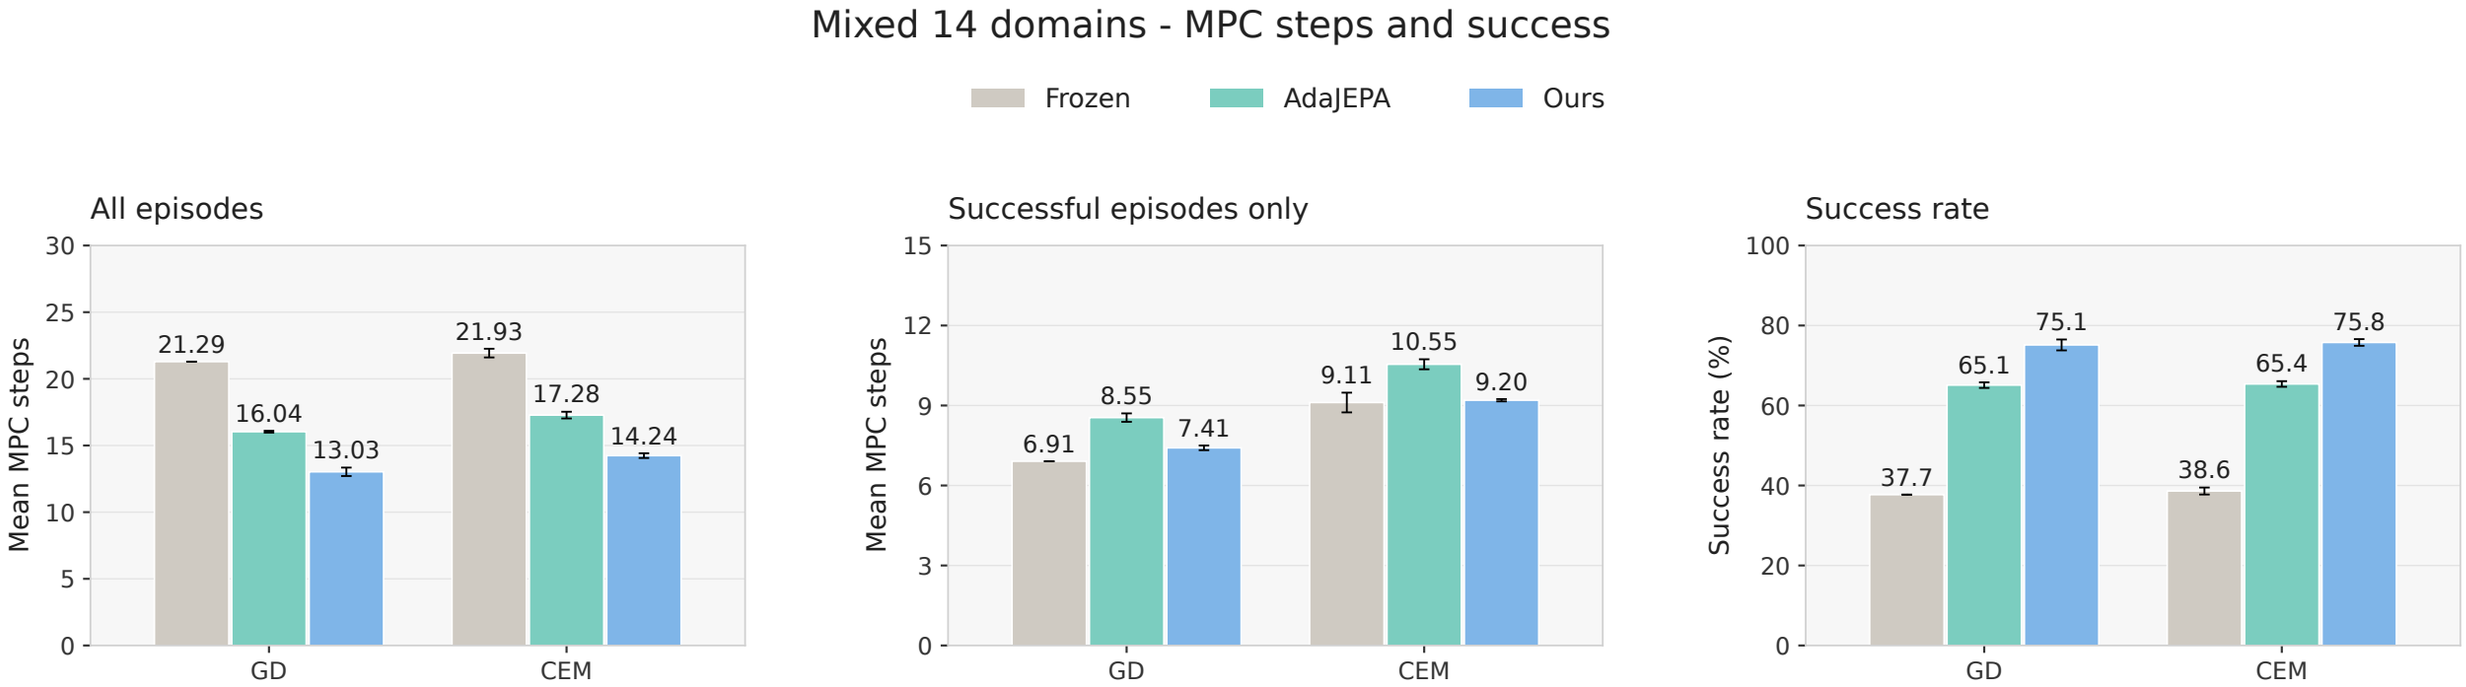

Historical mixed-14 comparison, unchanged: 2100 episodes per method and planner.


Original group means and sample SD are retained.

Failures count as 30 replans. Successful subsets differ by method; interpret together with success rate.

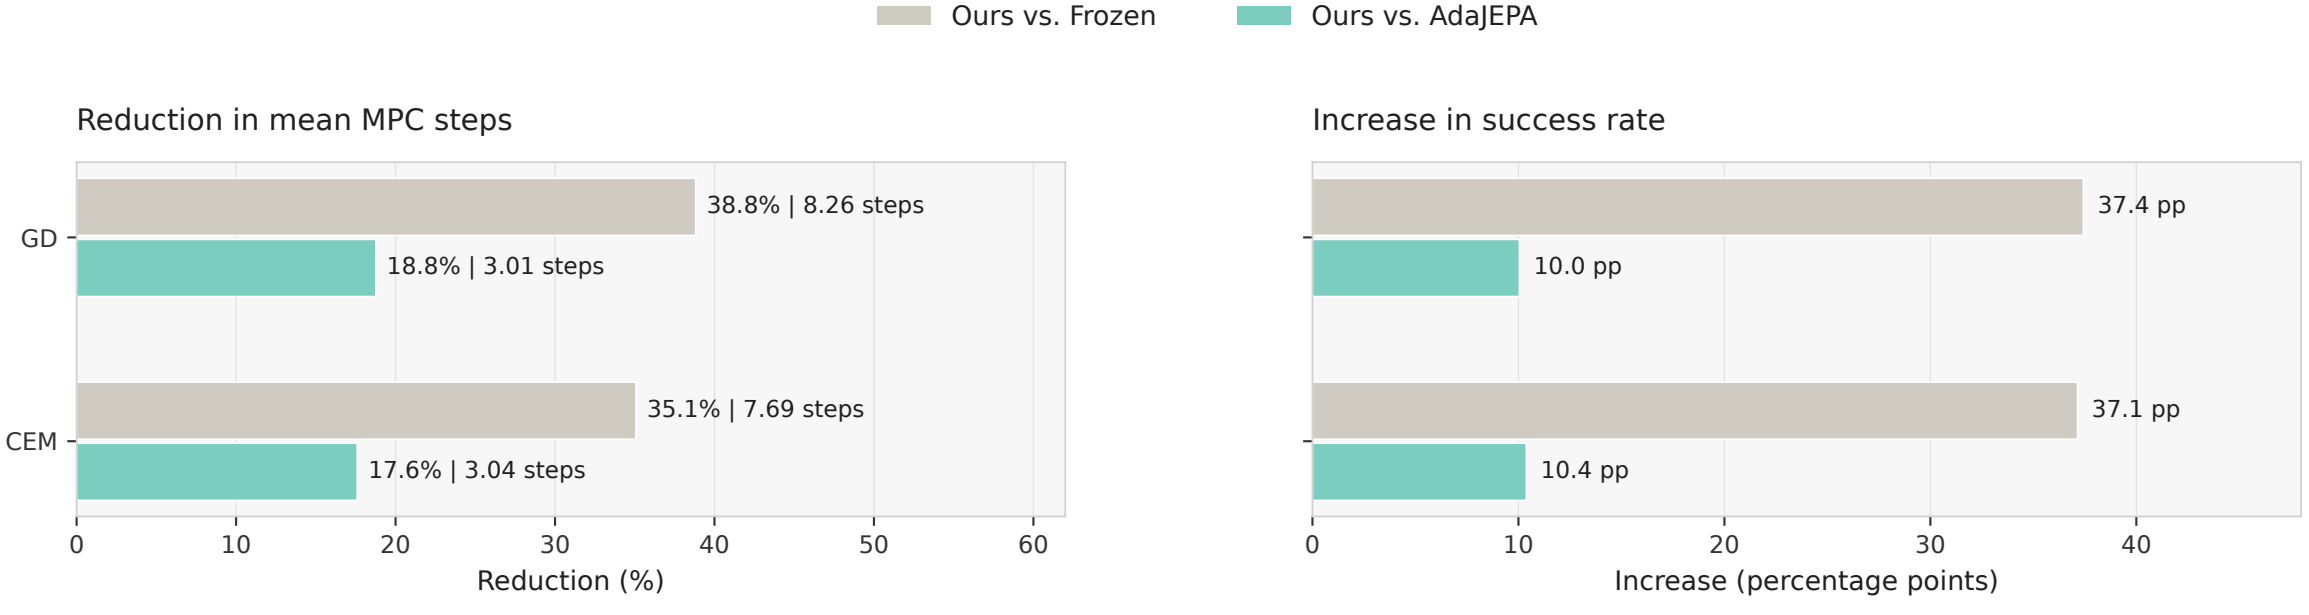

Step reduction = (baseline mean - Ours mean) / baseline mean; all episodes, including failures.

Success gain = Ours rate - baseline rate. Historical mixed-14 comparison; original statistics retained.

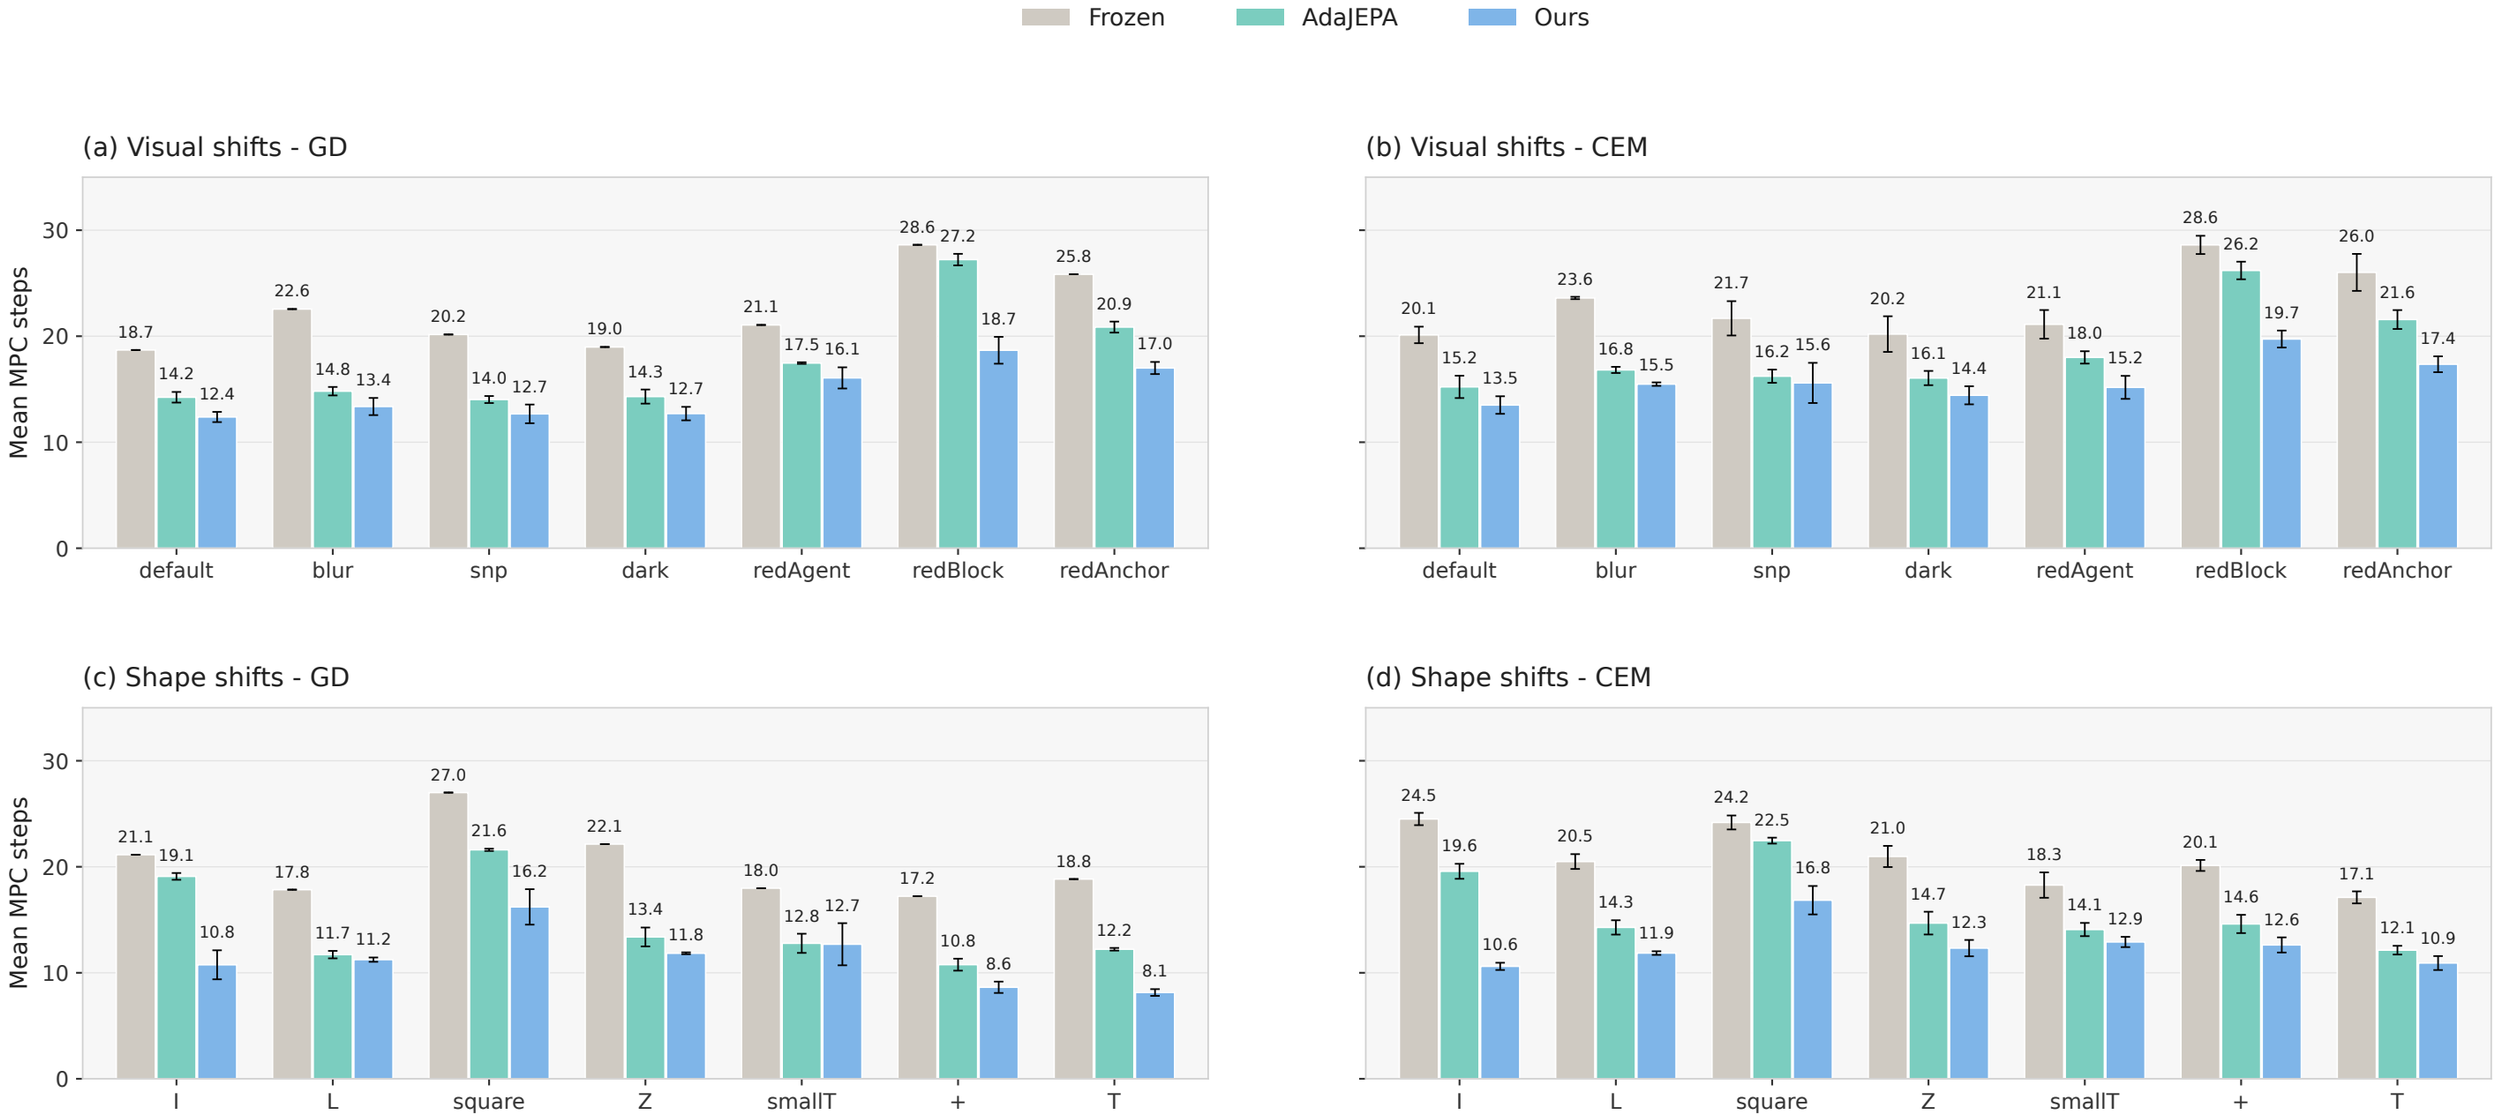

Mixed 14-domain experiment. All episodes; n = 150 per method / planner / domain. Mean +/- 1 sample SD across 3 units.

Failures count as 30 steps. Lower mean steps must be read with success rates in Figure 21. Ours: round 5.

Mixed 14 domains - MPC comparison

Historical mixed-14 experiment. All numerical results retained unchanged.

Planner	Method	Episodes	Success (%)	MPC, all episodes	MPC, successful only
GD	Frozen	2,100	37.71	21.29 +/- 0.00	6.91 +/- 0.00
GD	AdaJEPA	2,100	65.10	16.04 +/- 0.07	8.55 +/- 0.16
GD	**Ours**	**2,100**	**75.14**	**13.03 +/- 0.32**	**7.41 +/- 0.09**
CEM	Frozen	2,100	38.62	21.93 +/- 0.33	9.11 +/- 0.37
CEM	AdaJEPA	2,100	65.38	17.28 +/- 0.25	10.55 +/- 0.19
CEM	**Ours**	**2,100**	**75.76**	**14.24 +/- 0.18**	**9.20 +/- 0.04**

2100 episodes per method / planner. Original aggregation and sample SD are retained.

Failed episodes count as 30 replans. Successful-only subsets differ across methods.

This table retains the historical mixed-14 comparison and is separate from the new visual held-out test.