

Creating a Nomogram

[**Note:** It is not necessary to read this document to use nomogen. It is for reference only.

Since nomogen is experimental, some of the ideas here have been tested and abandoned, some others have yet to be tested, what's left should (hopefully) describe the internals of nomogen.]

Use well known **engineering principles**:

- Use tried and tested components and techniques.
Just hook together the good work of others.
- use brute force. (given to us by Moore's law.)


Method outline:

- Approximate each scale line with a polynomial,
- estimate the cost of each approximation. The cost is a function of the error in the scale curves and how well the curves fit into the allocated area
- use python's SciPy numerical optimisation library to minimise this cost,
- use pynomo libraries to scale and plot the nomogram.

The nomogram is calculated to **fit inside a unit square**. This is achieved by one of

1. tie the ends of the outer scales to the corners of the unit square (*current scheme*)
2. use a cost function that rewards the nomogram as it gets larger up to the boundary of the unit square, and then penalises it if it extends outside the unit square. (*possible future scheme*)

The following assumes we are to generate a nomogram for the function $w=w(u,v)$. The **u**, **v** & **w** scales are respectively on the left, right and middle of the nomogram.

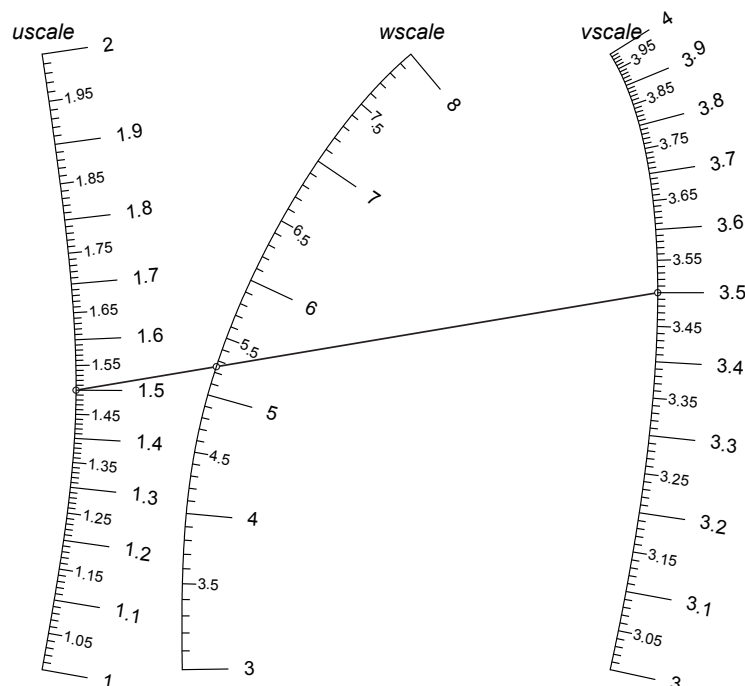

The x and y coordinates of the value u on the **u** scale are given by the parametric functions $x_u(u)$ and $y_u(u)$, and so on for the other scales.

Our goal is to use numerical techniques to find polynomials that closely approximate $x_u(u)$, etc.

The nomogram is generated on a unit square, which PyNomo scales to the required size when it creates the output.

The Polynomials

Each scale line is defined by a Chebyshev polynomial, not with a set of coefficients like

$$u_x = \sum_{k=0}^N \alpha_k T_k(u) \quad , \text{ but by interpolating its values at so-called Chebyshev nodes.}$$


A major problem with using equally spaced nodes to approximate the scale lines (or any function in general) is that the approximation can deviate wildly near the end points – see reference [6]. (This is known as **Runge's phenomenon** and is intuitively plausible since there are no nodes beyond the end points to constrain the approximating function.)

Polynomials defined at the Chebyshev nodes counter this by bunching the nodes near the ends, so (very nearly) minimising the maximum error.

If there are N+1 Chebyshev nodes for the u curve, they occur at the points

$$u_k = u_{min} + (u_{max} - u_{min}) (1 - \cos(\frac{k * \pi}{N})) / 2, \text{ where } k = 0, 1, \dots, N$$

These nodes can be interpreted as the projection from a semi-circle onto the u axis of equally spaced angles, so node u_k is the projection from an angle $k \frac{\pi}{N}$:

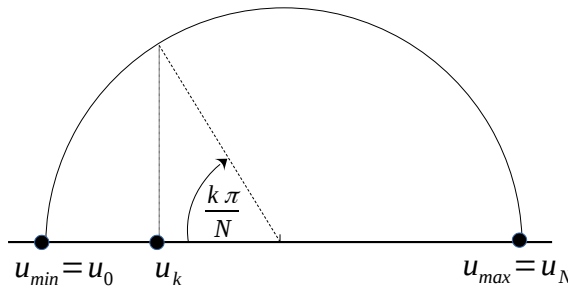

This scheme concentrates the nodes near the ends which keeps the approximation close to its correct value.

If we have values of the function at these points, there is a unique N-degree polynomial that fits these points.

We determine the coordinates of the u, v & w curves at the Chebyshev nodes, and from there generate the curves of the nomogram.

Taking the u scale as an example, we need to define the function $u_x(u)$. Given x_k , the x coordinate of the node u_k , we can efficiently interpolate the x coordinate of any point u as follows:

(This code assumes N is odd)

```

if u is one of  $u_k$  then
    use  $x_k$  &  $y_k$ , the known values for node k
else
    sumA = ( $x_0/(u-u_0)$  +  $x_N/(u-u_N)$ )/2
    sumB = ( $1/(u-u_0)$  +  $1/(u-u_N)$ )/2
    for k in 0 .. N
        t =  $1/(u-u_k)$ 
        sumA = t* $x_k$  - sumA
        sumB = t - sumB
    x(u) = sumA / sumB


```

The y coordinate, $y_u(u)$ is very similar, as are the functions for the other scale lines.

See references [4] and [5], which also describe how to calculate the derivatives of the function.

Basic Nomogram Calculations

Suppose we have 3 points, A, B & C in an x-y coordinate system:

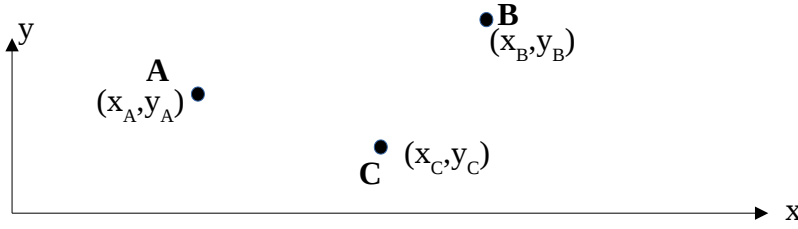

The area inside the triangle ABC is

$$Area = \frac{1}{2}((x_A - x_B)(y_A - y_C) - (x_A - x_C)(y_A - y_B))$$

(This is the vector cross product of the 2 line segments. It is calculated like a determinant, but technically, it is not a determinant.)

Alternatively, the area can be given by

$$Area = \frac{1}{2} |AB| |AC| \sin(\theta) ,$$

where $|AB|$ and $|AC|$ are the lengths of the line segments **AB** & **AC**, and θ is the angle between the two line segments.

The points A,B,C lie on a straight line if the Area = 0, or

$$(x_A - x_B)(y_A - y_C) = (x_A - x_C)(y_A - y_B)$$

$$x_A y_B + x_B y_C + x_C y_A - x_A y_C - x_B y_A - x_C y_B = 0 \quad (1)$$

The distance of the point C from the line AB is

$$d = \frac{2 * Area(ABC)}{base\ line\ AB}$$

$$d = \frac{(x_A - x_B)(y_A - y_C) - (x_A - x_C)(y_A - y_B)}{\sqrt{(x_A - x_B)^2 + (y_A - y_B)^2}} \quad (2)$$

We wish to generate a nomogram for the formula

$$w = w(u, v), \quad \text{where } u_{min} \leq u \leq u_{max}, \quad v_{min} \leq v \leq v_{max}$$

The scale lines are approximated by parametric curves with coordinates given by polynomial functions of u , v and w :

$$\mathbf{u} = (x_u, y_u), \text{ where } x_u = x_u(u) \text{ and } y_u = y_u(u)$$

and so on for the v & w scale lines.

This gives us functions $x_u(u)$, $y_u(u)$, etc., and since for any u & v such that $w = w(u,v)$, the nomogram points must lie on a straight line, we can write

$$\frac{(x_u - x_v)}{(y_u - y_v)} = \frac{(x_u - x_w)}{(y_u - y_w)} \quad \text{or rearranging}$$

$$x_u y_v - x_u y_w - x_v y_u + x_v y_w + x_w y_u - x_w y_v = 0$$


This is an alternative derivation of (1) above, and is equivalent to the determinant:

$$\begin{vmatrix} u_x(u) & u_y(u) & 1 \\ v_x(v) & v_y(v) & 1 \\ w_x(w) & w_y(w) & 1 \end{vmatrix}$$

which can be used as input for a type 9 nomogram in pynomo (see references [1] and [2]).

Given the function $w=w(u,v)$, and assuming we have approximate functions for the scale lines as above, we have the x & y coordinates of points u, v and w. Since these functions are only approximate, the point w on the w scale does not lie exactly on the index line connecting u & v, as shown below.

This error is shown as e in the following diagram:

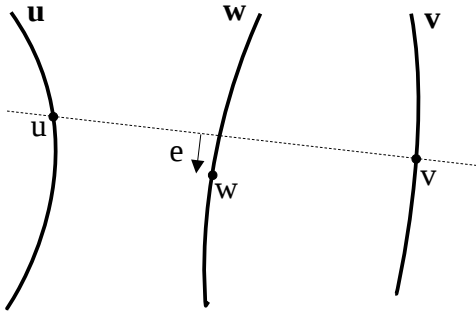


The strategy to generate a correct nomogram is to jiggle the equations of the scale lines until e converges to zero. (The python SciPy optimisation libraries do this for us.)

Derivatives of the scale lines

We have just seen that we want the error in the scale lines to be zero. Now we want to ensure the scale lines do not head off in a direction that makes the error larger.

Consider a small segment of the u, v & w scale lines as follows:

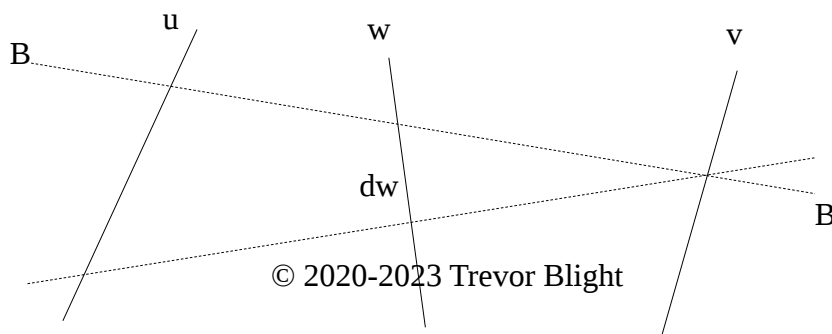

A

The index line AA intersects the scale lines at (x_u, y_u) , (x_v, y_v) & (x_w, y_w) .

The index line BB is a small perturbation of AA by an amount du , keeping its intersection with the v scale line unchanged.

We assume that index line AA has no error, and we want to find the conditions that guarantee that line BB also has no error.

The scale lines are defined by the equations $x_u = x_u(u)$, etc., and the function w is defined as $w = w(u, v)$

We can write the following since the intersection points on the lines are co-linear:

$$(x_u - x_v)(y_w - y_v) = (x_w - x_v)(y_u - y_v) \quad (3)$$

$$(x_u + \frac{dx_u}{du} du - x_v)(y_w + \frac{dy_w}{dw} dw - y_v) = (x_w + \frac{dx_w}{dw} dw - x_v)(y_u + \frac{dy_u}{du} du - y_v) \quad (4)$$

Expanding (4):

$$\begin{aligned} & (x_u + \frac{dx_u}{du} du - x_v)y_w + (x_u + \frac{dx_u}{du} du - x_v)\frac{dy_w}{dw} dw - (x_u + \frac{dx_u}{du} du - x_v)y_v \\ &= (x_w + \frac{dx_w}{dw} dw - x_v)y_u + (x_w + \frac{dx_w}{dw} dw - x_v)\frac{dy_u}{du} du - (x_w + \frac{dx_w}{dw} dw - x_v)y_v \end{aligned}$$

Dropping second order terms & substituting (3):

$$\begin{aligned} & y_w \frac{dx_u}{du} du + (x_u - x_v) \frac{dy_w}{dw} dw - y_v \frac{dx_u}{du} du = y_u \frac{dx_w}{dw} dw + (x_w - x_v) \frac{dy_u}{du} du - y_v \frac{dx_w}{dw} dw \\ & (y_w - y_v) \frac{dx_u}{du} du + (x_u - x_v) \frac{dy_w}{dw} dw = (y_u - y_v) \frac{dx_w}{dw} dw + (x_w - x_v) \frac{dy_u}{du} du \end{aligned}$$

We also know

$$dw = \frac{\partial w}{\partial u} du + \frac{\partial w}{\partial v} dv ,$$

and since in this case $dv = 0$, we have:


$$dw = \frac{\partial w}{\partial u} du , \text{ so substitute this and rearrange:}$$

$$\frac{\partial w}{\partial u} ((x_u - x_v) \frac{dy_w}{dw} - (y_u - y_v) \frac{dx_w}{dw}) = (x_w - x_v) \frac{dy_u}{du} - (y_w - y_v) \frac{dx_u}{du} \quad (5)$$

There is a similar equation for an index line perturbed along the v scale line while keeping the u value constant:

$$\frac{\partial w}{\partial v}((x_u - x_v)\frac{dy_w}{dw} - (y_u - y_v)\frac{dx_w}{dw}) = (x_u - x_w)\frac{dy_v}{dv} - (y_u - y_w)\frac{dx_v}{dv} \quad (6)$$

Now move an index line by a small amount, but keep the w point unchanged:

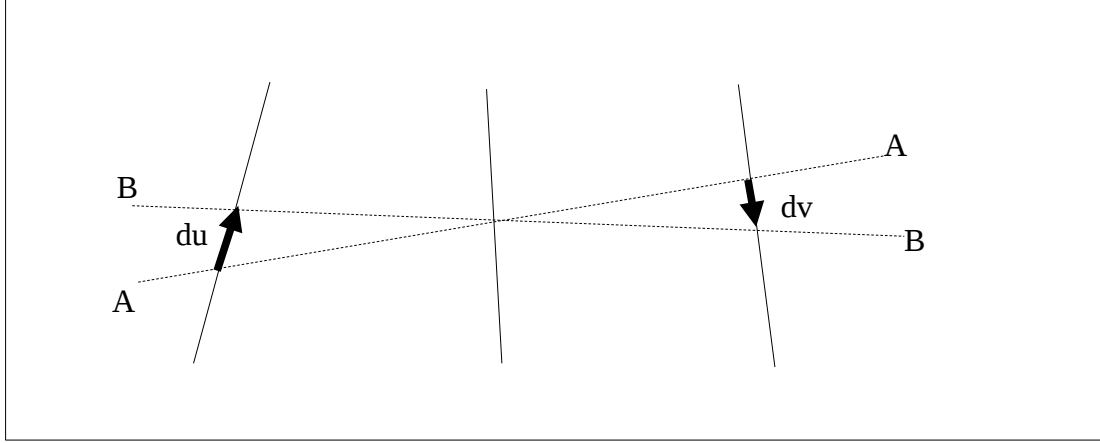

As before, we can write:

$$\frac{x_u - x_w}{y_u - y_w} = \frac{x_w - x_v}{y_w - y_v}, \text{ and}$$

$$\frac{x_u + \frac{dx_u}{du} du - x_w}{y_u + \frac{dy_u}{du} du - y_w} = \frac{x_v + \frac{dx_v}{dv} dv - x_w}{y_v + \frac{dy_v}{dv} dv - y_w}$$

$$(x_u + \frac{dx_u}{du} du - x_w)(y_v + \frac{dy_v}{dv} dv - y_w) = (x_v + \frac{dx_v}{dv} dv - x_w)(y_u + \frac{dy_u}{du} du - y_w)$$

$$(y_v - y_w)\frac{dx_u}{du} du + (x_u - x_w)\frac{dy_v}{dv} dv = (y_u - y_w)\frac{dx_v}{dv} dv + (x_v - x_w)\frac{dy_u}{du} du$$

Now, from $w = w(u, v)$, we get

$$dw = \frac{\partial w}{\partial u} du + \frac{\partial w}{\partial v} dv$$

In this case, $dw = 0$, so

$$-\frac{\frac{\partial w}{\partial u}}{\frac{\partial w}{\partial v}} du = dv$$

Substitute into the above, then tidy up:

$$\frac{\partial w}{\partial v}((x_w - x_v)\frac{dy_u}{du} - (y_w - y_v)\frac{dx_u}{du}) = \frac{\partial w}{\partial u}((x_u - x_w)\frac{dy_v}{dv} - (y_u - y_w)\frac{dx_v}{dv}) \quad (7)$$

NOTES:

1. *this is not independent of 5 & 6. This can be seen by dividing those 2 equations, then cancelling the common term and cross multiplying the denominators.*
2. *These equations are telling us that the slopes of the axes (ie $\frac{dx}{du}$, etc) must head off in a direction that keeps the points in a nomogram lined up.*

So, the coordinates of any index line must satisfy equations 3, 5 & 6. This information can be used to:

1. help determine an initial estimate
2. constrain the numerical solution for a smoother nomogram

TODO: this is just the first term of a Taylor's series about the index line. Is it helpful to go further?

As an aside, consider equation (7) above for the special case of a nomogram with 3 parallel lines, i.e. where x is fixed for each axis, so $\frac{dx_u}{du} = 0$ and $\frac{dx_v}{dv} = 0$.

This leaves:

$$\frac{\partial w}{\partial v}(x_w - x_v)\frac{dy_u}{du} = \frac{\partial w}{\partial u}(x_u - x_w)\frac{dy_v}{dv}$$

Now take the natural log of both sides:

$$\ln \frac{\partial w}{\partial v} + \ln((x_w - x_v)\frac{dy_u}{du}) = \ln \frac{\partial w}{\partial u} + \ln((x_u - x_w)\frac{dy_v}{dv})$$

Differentiating with respect to u then v leaves only the leftmost term on each side:

$$\frac{\partial^2 \ln \frac{\partial w}{\partial v}}{\partial u \partial v} = \frac{\partial^2 \ln \frac{\partial w}{\partial u}}{\partial u \partial v} \quad (8)$$

Thus, with equation (8) above we have a derivation of Paul de Saint-Robert's criterion for the feasibility of a 3 parallel line nomogram – see reference [3].

Which way are the axes oriented?

If we assume that the u scale increases (varies from u_{\min} to u_{\max}) as the y coordinate increases, and if we define


$$w_0 = w(u_{\min}, v_{\min})$$

$$w_1 = w(u_{\max}, v_{\min})$$


$$w_2 = w(u_{\min}, v_{\max})$$

then the w scale increases upwards if $w_1 > w_0$ and the v scale increases upwards if

$(w_1 > w_0) = (w_2 > w_0)$, i.e. w_1 and w_2 are both less than, or both greater than w_0 , as can be seen in the diagrams below:

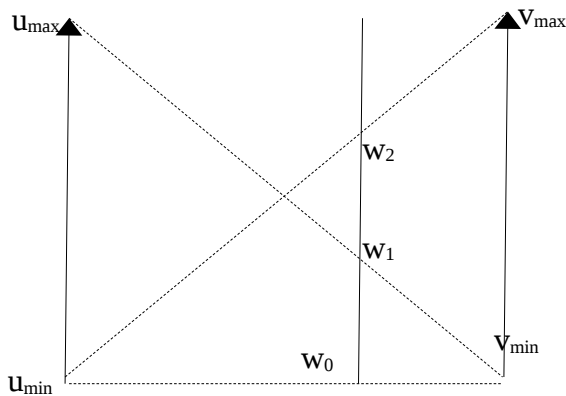

Here, the v scale increases upwards and both w_1 and w_2 must be greater than w_0 if the w scale increases upward, or they both must be less than w_0 if the w scale increases downwards.

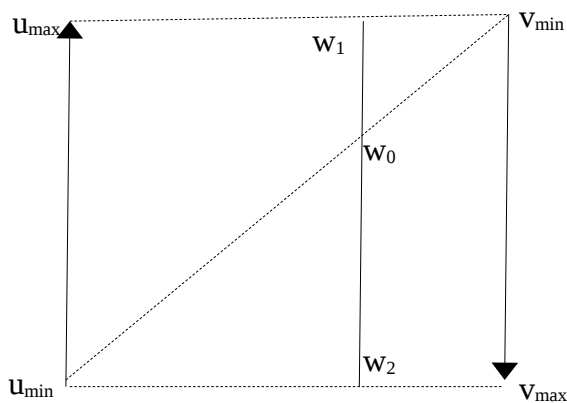


Here, the v scale increases downwards and w_0 , must lie between w_1 and w_2 . As above, w_1 is greater than w_0 if the w scale is increasing upwards, otherwise w_1 is less than w_0 if the w scale increases downwards

Initial Estimate

The optimisation algorithms need a good initial guess to converge on the optimal solution nomogram.

A Simple Linear Estimate

Try to approximate the true nomogram with a simple linear one as follows:

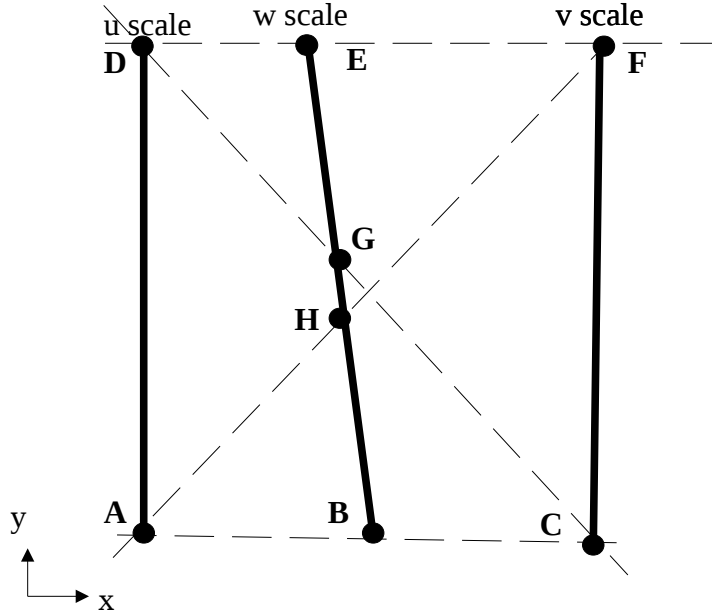

The u, v & w scale lines are respectively **AD**, **CF** & **BE**.

Point **A** is at (0,0), **C** is at (1,0), **D** is at (0,1), and **F** is at (1,1), u varies from u_{\min} to u_{\max} & v from v_{\min} to v_{\max} . Four index lines are shown, and their points of intersection with the scale lines are marked **A** to **H**. The x coordinate of u is given by the function $x_u = x_u(u)$, with similar functions for the y coordinate and the variables v & w .

We have for the equations of each of the scale lines:

$$u_x = 0$$

$$u_y = \frac{u - u_{\min}}{u_{\max} - u_{\min}}$$

$$v_x = 1$$

$$w_x = c + \alpha_{wx}(w - w_B)$$

$$w_y = \alpha_{wy}(w - w_B) \quad ,$$

where c , α_{wx} and α_{wy} are constants that are not yet determined.

If the v scale has v_{\max} at the top, then define

$$v_{\text{top}} = v_{\max}, \quad v_{\text{bottom}} = v_{\min}$$

Otherwise, the v scale is reversed so that v_{\min} is at the top, then define:

$$v_{\text{top}} = v_{\min}, \quad v_{\text{bottom}} = v_{\max}$$

We can now write

$$v_y = \frac{v - v_{bottom}}{v_{top} - v_{bottom}}$$

G is where the scale line for w intersects the index line for $u=u_{max}$, $v=v_{bottom}$, so $w_G=w(u_{max}, v_{bottom})$, and similarly, $w_H=w(u_{min}, v_{top})$, $w_B=w(u_{min}, v_{bottom})$ & $w_E=w(u_{max}, v_{top})$.

Note that point **B** is at $(c, 0)$, **E** is at $(c + \alpha_{wx}(w_E - w_B), 1)$, and **G** & **H** intersect the diagonal index lines, so

$$\alpha_{wy} = \frac{1}{w_E - w_B} \quad (9)$$

$$c + \alpha_{wx}(w_H - w_B) = \alpha_{wy}(w_H - w_B) = \frac{w_H - w_B}{w_E - w_B} \quad (10)$$

$$c + \alpha_{wx}(w_G - w_B) = 1 - \alpha_{wy}(w_G - w_B) = 1 - \frac{w_G - w_B}{w_E - w_B} = \frac{w_E - w_G}{w_E - w_B} \quad (11)$$

Equation (9) gives α_{wy} and (10) & (11) can be solved to give:

$$\alpha_{wx} = \frac{w_E - w_G - w_H + w_B}{(w_E - w_B)(w_G - w_H)}$$

$$c = \frac{w_H - w_B}{w_E - w_B} - \alpha_{wx}(w_H - w_B)$$

A more sophisticated approach might be to find quadratic and cubic approximations for the scale lines, and using the derivative equations to find the required coefficients.

Problems that might occur:

1. this approximation can leave w_B & w_E outside the unit square.
A simple way to address this is to clip the values so that $0 \leq w_B, w_E \leq 1$
2. w_G might equal w_H , leading to a division by zero in the equation above.
A simple way to address this is to make the w scale line vertical, or use the derivative equations that are described below.

The approximation error

Given a candidate set of the **u**, **v** & **w** scales, determine an error function as $E = \sum_{i,j=0}^N e_{ij}^2$, where e_{ij} is the error of the line determined by the points u_i & v_j , where u_i & v_j refer to the i^{th} and j^{th} Chebyshev nodes on the **u** & **v** scale lines.

If the **u**, **v** & **w** scales are approximate, the point corresponding to $w_{ij} = w(u_i, v_j)$ will not lie on the index line connecting u_i & v_j . The distance of w_{ij} from the line is given by equation (2) on page 4, and the coordinates are found from the equations $u_x(u)$, etc.

We can extend this idea by demanding also that the slopes of the scale lines must have minimum error as well.

Consider figure 1 below where a line AB intersects the **u** & **v** scale lines at points (x_u, y_u) & (x_v, y_v)

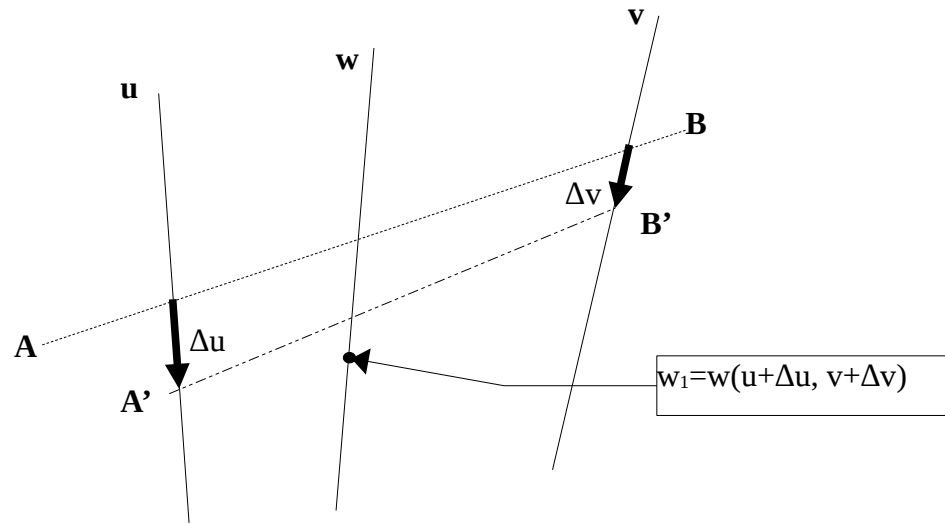


Figure 1: intersection line

Rewriting (2) above we have the error, e_0 . For the line AB:

$$e_0 = \frac{x_u y_v + x_w y_u + x_v y_w - x_w y_v - x_u y_w - x_v y_u}{\sqrt{(x_u - x_v)^2 + (y_u - y_v)^2}}$$

For any nearby line, the intersection coordinates at A'B' are given by

$$\left(x_u(u) + \frac{dx}{du} \Delta u, y_u(u) + \frac{dy}{du} \Delta u \right) \text{ and } \left(x_v(v) + \frac{dx}{dv} \Delta v, y_v(v) + \frac{dy}{dv} \Delta v \right)$$

where Δu and Δv are the small deviations along the **u** & **v** scale lines. The point w_1 is the point on the **w** scale line corresponding to w for the values of $u + \Delta u$ & $v + \Delta v$, and has coordinates $(x_w(w(u + \Delta u, v + \Delta v)), y_w(w(u + \Delta u, v + \Delta v)))$. If the scale lines are so far only approximate, w_1 will normally not lie on the line A'B'.

The error for the line A'B' is the distance of the point w_1 from A'B' and nearby lines, given by

$$E = e_0 + \frac{\partial e}{\partial u} \Delta u + \frac{\partial e}{\partial v} \Delta v$$

Differentiating the expression for e,

$$\begin{aligned} \frac{\partial e}{\partial u} &= \frac{\partial}{\partial u} \left(\frac{x_u y_v + x_w (y_u - y_v) + (x_v - x_u) y_w - x_v y_u}{\sqrt{(x_u - x_v)^2 + (y_u - y_v)^2}} \right) \\ \frac{\partial e}{\partial u} &= \frac{\frac{dx_u}{du} (y_v - y_w) + \frac{\partial w}{\partial u} \left(\frac{dx_w}{dw} (y_u - y_v) - (x_u - x_v) \frac{dy_w}{dw} \right) - (x_v - x_u) \frac{dy_u}{du}}{\sqrt{(x_u - x_v)^2 + (y_u - y_v)^2}} \\ &\quad - \frac{e_0 \left((x_u - x_v) \frac{dx_u}{du} + (y_u - y_v) \frac{dy_u}{du} \right)}{(x_u - x_v)^2 + (y_u - y_v)^2} \end{aligned}$$

where e_0 is the error defined above.

Similarly, for v:

$$\begin{aligned} \frac{\partial e}{\partial v} &= \frac{\partial}{\partial v} \left(\frac{x_u y_v + x_w (y_u - y_v) + (x_v - x_u) y_w - x_v y_u}{\sqrt{(x_u - x_v)^2 + (y_u - y_v)^2}} \right) \\ \frac{\partial e}{\partial v} &= \frac{\frac{dx_v}{dv} (y_w - y_u) + \frac{\partial w}{\partial v} \left(\frac{dx_w}{dw} (y_u - y_v) - (x_u - x_v) \frac{dy_w}{dw} \right) - (x_w - x_u) \frac{dy_v}{dv}}{\sqrt{(x_u - x_v)^2 + (y_u - y_v)^2}} \\ &\quad + \frac{e_0 \left((x_u - x_v) \frac{dx_v}{dv} + (y_u - y_v) \frac{dy_v}{dv} \right)}{(x_u - x_v)^2 + (y_u - y_v)^2} \end{aligned}$$

When the errors e_0 , $\frac{\partial e}{\partial u}$ and $\frac{\partial e}{\partial v}$ are reduced to zero, these equations match the equations found in the section Derivatives of the scale lines on page 5.

This gives an error function for the (u,v) pair:

$$E_{ij} = e_0^2 + \mu_u \left(\frac{\partial e}{\partial u} \right)^2 + \mu_v \left(\frac{\partial e}{\partial v} \right)^2 \quad (12)$$

, where μ_u and μ_v are some scaling constants.

- Create an error function by summing the squares of all errors over all Chebyshev nodes for u & v
- Use SciPy to minimise this error as a function of the node coordinates
- if the minimum error is acceptably small, then the solution is the nodes that define the nomogram, otherwise a solution cannot be found.

There are some issues that need to be resolved in the above scheme:


1. The number of error calculations is of the order $O(n^2)$, where n is the degree of the polynomial, but the number of coordinates to fix is of the order $O(n)$. If n is large, pruning the number of error calculations can improve computation speed. (*This doesn't work.*)
2. If the distance between the tic marks of one of the scale lines is non-linear, then the Chebyshev nodes are bunched together at some part in the line, and spread out at another. This could reduce the accuracy of the error calculations. Using log scales helps if the scales are logarithmic.

Instead of defining the Chebyshev nodes on the values of u (or v or w), define them on some function $l_u(u)$ of the scale line, and similarly for $l_v(v)$ & $l_w(w)$

... TBC ...

The measurement error

These 2 nomograms for the equation $1/w = 1/u + 1/v$ have different shapes. Is one better than the other?

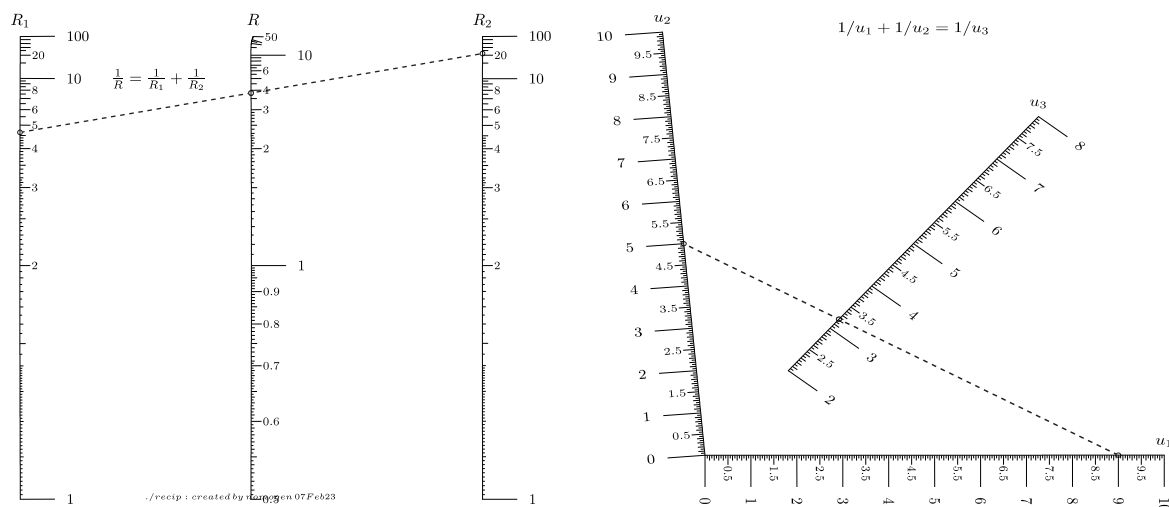

Our intuition tells us a good nomogram must fill its area as much as possible to make readings accurate.

If we have a formula

$$w = w(u, v), \quad \text{where} \quad u_{\min} \leq u \leq u_{\max}, \quad v_{\min} \leq v \leq v_{\max}$$

we can determine the position of the u , v & w curves at the Chebyshev nodes, and from there generate the curves of the nomogram.

To get best accuracy, we want the nomogram to be as large as possible, but lie inside the area available.

Available methods are:

1. Tie the ends of the outer scale line to the unit square.
This is the simplest method, but doesn't take advantage of V-type nomograms.
2. Minimise alignment error. If the scale lines are as tall as possible, the corresponding scale variable takes the maximum length. So an alignment error of, say, 0.1mm will correspond to the smallest possible error in the scale variable. Also, if the scale lines are separated as widely as possible, any parallax type errors will be minimised.

Even with a perfectly constructed nomogram, a perfectly drawn index line is not possible in practice. If we assume some tolerance in the position of the index line, we want the measurement errors of each of the scale variables to be as small as possible.

In figure 2 below, index line AA intersects the u scale line:

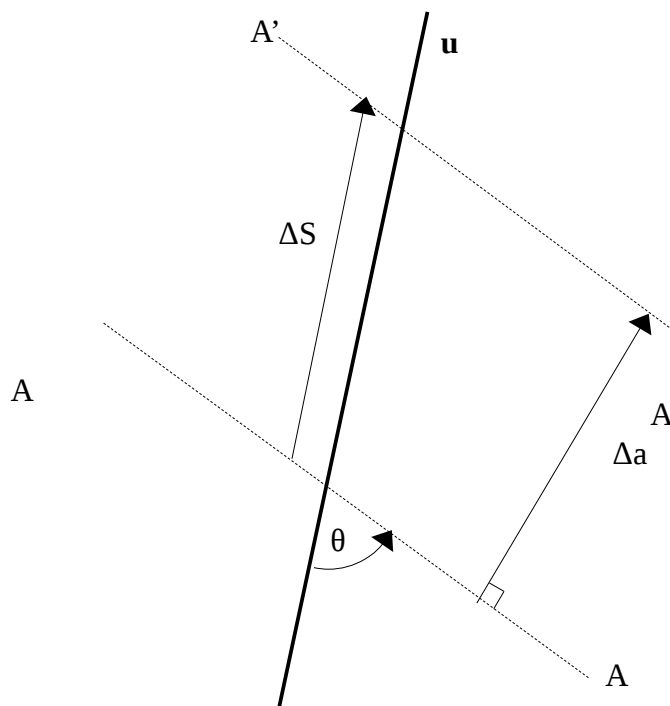


Figure 2: index lines intersecting the u scale line

The measured line A'A' has an offset error Δa from the true line AA and it intersects the u scale a distance of ΔS from the exact position.

For a given Δa , we want the corresponding Δu to be as small as possible. Mathematically, we want to minimise $\frac{du}{da}$ subject to the nomogram fitting inside the unit square.

We can write these 2 equations for ΔS :

$$\Delta S = \frac{\Delta a}{\sin(\theta)}$$

$$\Delta S = \sqrt{\left(\frac{dx_u}{du}\right)^2 + \left(\frac{dy_u}{du}\right)^2} \Delta u$$

For any given (u,v) pair, the line AA intersects the points $(x_u(u), y_u(u))$ and $(x_v(v), y_v(v))$, and at the intersection, the u scale line is aligned with the vector $(\frac{dx_u}{du}, \frac{dy_u}{du})$.

Now use the definition of the vector cross product to write:

$$\sin(\theta) = \frac{\frac{dx_u}{du}(y_u(u) - y_v(v)) - \frac{dy_u}{du}(x_u(u) - x_v(v))}{\sqrt{\left(\frac{dx_u}{du}\right)^2 + \left(\frac{dy_u}{du}\right)^2} \sqrt{(x_v(v) - x_u(u))^2 + (y_v(v) - y_u(u))^2}}$$

Combine the above to eliminate ΔS and $\sin(\theta)$:

$$\Delta a = \frac{\frac{dx_u}{du}(y_u(u) - y_v(v)) - \frac{dy_u}{du}(x_u(u) - x_v(v))}{\sqrt{\left(\frac{dx_u}{du}\right)^2 + \left(\frac{dy_u}{du}\right)^2} \sqrt{(x_v(v) - x_u(u))^2 + (y_v(v) - y_u(u))^2}} \sqrt{\left(\frac{dx_u}{du}\right)^2 + \left(\frac{dy_u}{du}\right)^2} \Delta u$$

$$\Delta a = \frac{\frac{dx_u}{du}(y_u(u) - y_v(v)) - \frac{dy_u}{du}(x_u(u) - x_v(v))}{\sqrt{(x_v(v) - x_u(u))^2 + (y_v(v) - y_u(u))^2}} \Delta u$$

Rearrange this and take the limit:

$$\frac{du}{da} = \frac{\sqrt{(x_v(v) - x_u(u))^2 + (y_v(v) - y_u(u))^2}}{\frac{dx_u}{du}(y_u(u) - y_v(v)) - \frac{dy_u}{du}(x_u(u) - x_v(v))} \quad (13)$$

Note that the reciprocal of this is the cross product of two vectors, \mathbf{x}' and \mathbf{n} , where \mathbf{x}' is

$(\frac{dx_u}{du}, \frac{dy_u}{du})$ which is the rate of change of distance in the direction of the u scale line. (It's a

velocity vector.) The vector \mathbf{n} is $\frac{(y_u(u) - y_v(v), x_u(u) - x_v(v))}{\sqrt{(x_v(v) - x_u(u))^2 + (y_v(v) - y_u(u))^2}}$ which is a unit vector along the index line AA.




Figure 3: The cross product of \mathbf{u}' and \mathbf{n}

The magnitude of this vector is the area created by the cross product between \mathbf{x}' and \mathbf{n} as shown in figure 3 above.


So minimising equation (13) is equivalent to maximising this area (because it's a reciprocal).

This means we want to:

1. make \mathbf{x}' as long as possible, i.e. stretch the scale lines as much as possible. Remember, \mathbf{n} is a unit vector, so its length is fixed.
2. make the vectors as close to perpendicular as possible, i.e. make the scale lines as far apart as possible.

This matches our intuition on what makes a better nomogram.

Now consider an index line AA crossing 3 scale lines \mathbf{u} , \mathbf{v} & \mathbf{w} :

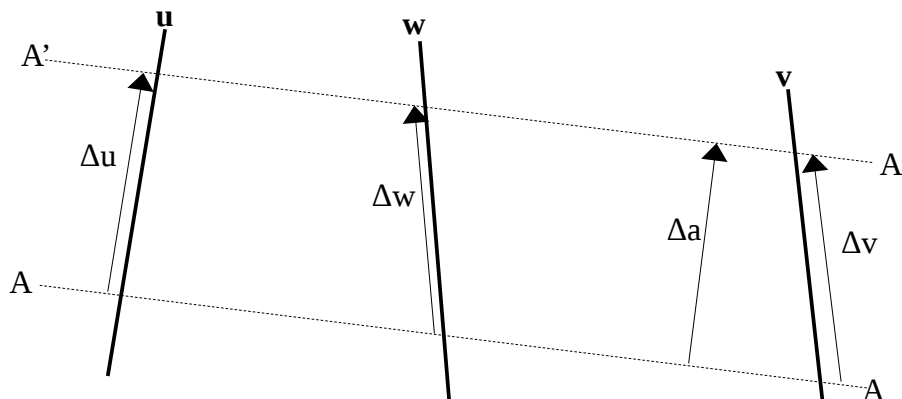

$A'A'$ is the measured line, and has an offset error Δa from the ideal line AA. Δu , Δv & Δw are the measurement errors in the scale variables.

Recalling (13) above,

$$\Delta u = \frac{\sqrt{(x_v(v)-x_u(u))^2 + (y_v(v)-y_u(u))^2}}{\frac{dx_u}{du}(y_u(u)-y_v(v)) - \frac{dy_u}{du}(x_u(u)-x_v(v))} \Delta a = \xi_u \Delta a$$

with a similar expressions for ξ_v .

We can write:

$$\Delta w = \frac{\partial w}{\partial u} \Delta u + \frac{\partial w}{\partial v} \Delta v$$

Now substitute Δu & Δv :

$$\Delta w = \Delta a \left(\frac{\partial w}{\partial u} \xi_u + \frac{\partial w}{\partial v} \xi_v \right)$$

Taking the limit as Δa approaches zero:

$$\frac{dw}{da} = \frac{\partial w}{\partial u} \xi_u + \frac{\partial w}{\partial v} \xi_v \quad (14)$$

We now we have expressions that can be optimised to generate the best nomogram for the given function.

This is not sufficient, however, because this would create a nomogram of infinite size.

We need a cost function to penalise nomograms that are larger than the specified paper area.

Consider this cost function:

$$c(t) = \exp(40*(-0.3-t)) + \exp(40*(t-1.3)) \quad (15)$$

Its value is very close to 1 in the central region of the unit square, but near the edges it quickly grows positive as it approaches the boundaries at 0 or 1 as shown in 4 below.

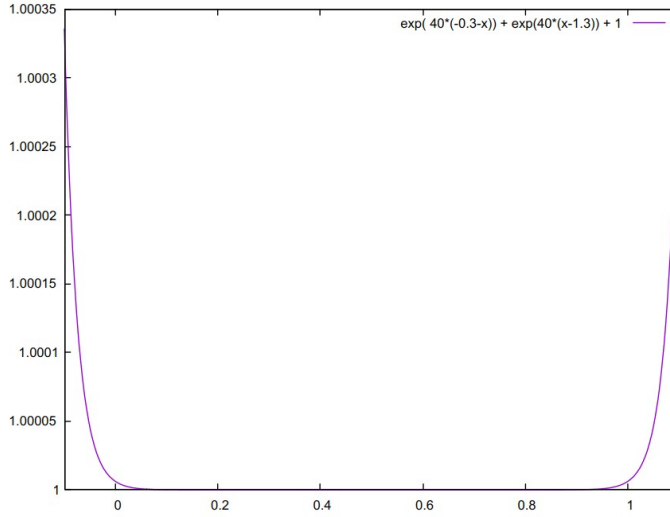


Figure 4: Cost vs position inside unit square

Define the cost of the nomogram due to its shape as

$$\frac{dw}{da} (c(x_u) + c(y_u) + c(x_v) + c(y_v) + 1) ,$$

where $\frac{dw}{da}$ is defined in equation (14) above. The $c(x)$ and $c(y)$ terms are from (15) above and are the costs of the x & y coordinates of the Chebyshev nodes on the u & v scale lines. We can add this term to the overall cost function for the nomogram given by (12) above

Now we can minimise the shape cost of a nomogram by increasing the area up to the edges. Near the edges, the costs start to increase rapidly beyond the boundary of the unit square. Thus we can achieve a balance where the nomogram has the smallest measurement error for the specified nomogram size.

Further Investigations

Tabulated data

Since the construction method already outlined uses a least-squares approach, it should be possible to construct a nomogram from tabulated data.

Instead of using u_i , v_j & w_{ij} derived from equations, use these values stored in the tabulated data.

Scales Transformations

Eversham [3], p 203, “Džems-Levi shows that there are three, and only three, projectively distinct scales for x . They are:

$$f_1(x) = e^{ax}$$

$$f_1(x) = ax$$

$$f_1(x) = \tan(ax)$$

References

1. PyNomo documentation
2. <https://deadreckonings.files.wordpress.com/2009/07/creatingnomogramswithpynomo.pdf>
3. The History and Development of Nomography, H. A. Eversham
4. “Barycentric Lagrange Interpolation”, Jean-Paul Berrut & Lloyd N. Trefethen, SIAM REVIEW Vol. 46, No. 3, pp. 501–51
5. Spectral Methods in Matlab, Lloyd N. Trefethen,
<http://www.comlab.ox.ac.uk/oucl/work/nick.trefethen>
6. Introduction to approximating functions with Chebyshev polynomials
https://www.youtube.com/watch?v=F_43oTnTXiw
<https://blogs.mathworks.com/cleve/2018/12/10/explore-runges-polynomial-interpolation-phenomenon/>
<https://demonstrations.wolfram.com/RungesPhenomenon/>