



Jobs

Generated by Talend Cloud Data
Management Platform

Project Name	BH_Oracle_Integrations	GENERATION DATE	Apr 20, 2023 11:39:36 AM
AUTHOR	Paranjape, Shruti	Talend Cloud VERSION	7.3.1.20210623_0656-patch

Summary

[Project Description](#)

[Description](#)

[Preview Picture](#)

[Settings](#)

[Context List](#)

[Component List](#)

[Components Description](#)

Project Description


Properties	Values
Name	BH_Oracle_Integrations
Language	java

Description	BH_Oracle_Integrations
-------------	------------------------

Description

Properties	Values
Name	file_to_mssql_load
Author	Paranjape, Shruti
Version	0.1
Purpose	
Status	
Description	
Creation	Mar 2, 2021 2:54:17 AM
Modification	Mar 24, 2021 3:33:14 AM

Preview Picture

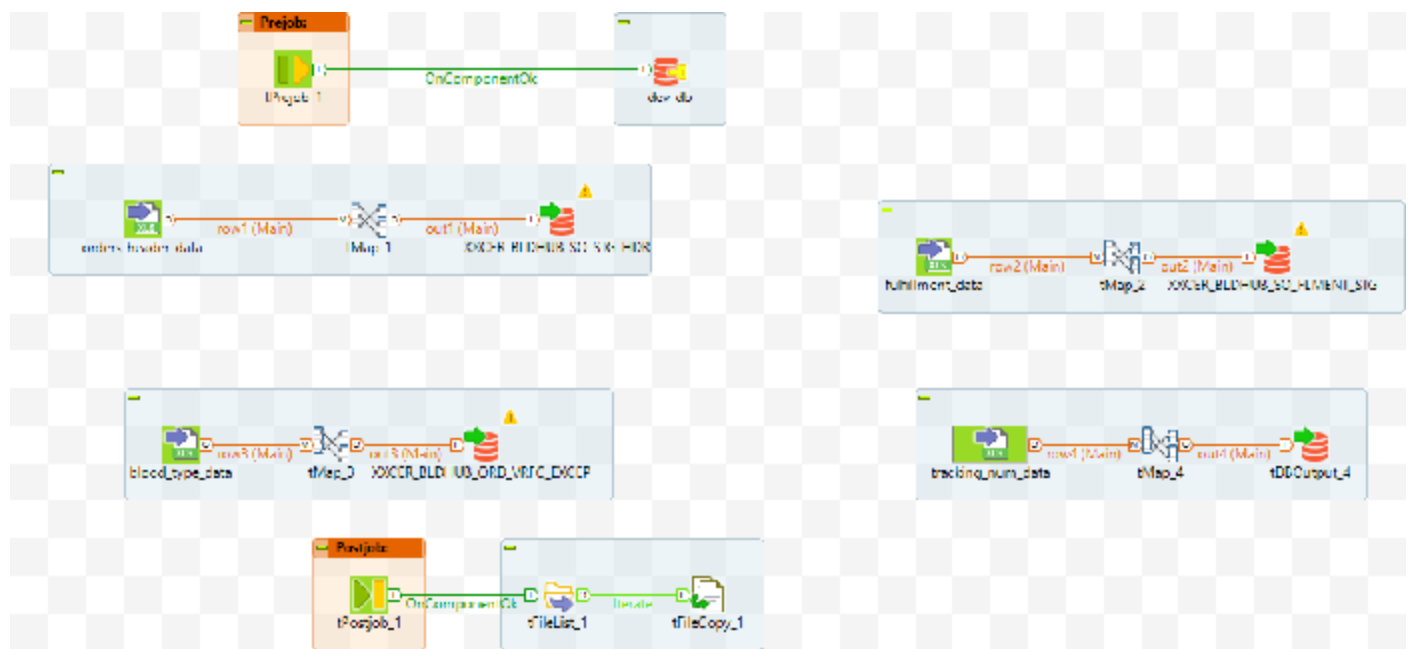

Settings

Extra settings

Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	true
From File (implicit context)	true
From File	"C:/TSC_V7.2.1/Config_files/BH_credentials.txt"
Print operations	false
Disable warnings	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Type	Value	Source
csv_path	csv_path?	false	id_String		
target_csv_path	target_csv_path?	false	id_String		


Component List

Component Name	Component Type
tDBConnection_1	tMSSqlConnection
tDBOutput_1	tMSSqlOutput
tDBOutput_2	tMSSqlOutput
tDBOutput_3	tMSSqlOutput
tDBOutput_4	tMSSqlOutput
tFileCopy_1	tFileCopy
tFileInputExcel_1	tFileInputExcel
tFileInputExcel_2	tFileInputExcel
tFileInputExcel_3	tFileInputExcel
tFileInputExcel_4	tFileInputExcel
tFileList_1	tFileList
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap

tMap_4	tMap
tPostjob_1	tPostjob
tPrejob_1	tPrejob

Components Description

Component tMSSqlConnection

	UNIQUE NAME	tDBConnection_1	INPUT(S)	tPrejob_1
	LABEL	dev_db	OUTPUT(S)	none


Component Parameters:

Properties	Values
Database	tMSSqlConnection
Unique Name	tDBConnection_1
Component Name	tMSSqlConnection
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server ELT/Connections
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlConnection
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
JDBC Provider	MSSQL_PROP
Host	"BISON"
Database Driver	MSSQL
Port	"1433"
Schema	"dbo"
Database	"CER_DEVINT"
Username	"cerdevint"
Password	*****
Encoding	"ISO-8859-15"
Additional JDBC Parameters	""
Use or register a shared DB Connection	false

Shared DB Connection Name	
Specify a data source alias	false
Data source alias	""
Authenticate using Azure Active Directory	false
Auto Commit	true
Share identity insert in multi table	false
Label format	dev_db
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_1	INPUT(S)	tMap_1
	LABEL	XXCER_BLDHUB_SO_STG_HDR	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_1

Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS

Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL
Username	""
Password	**
Table	"XXCER_BLDHUB_SO_STG_HDR"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	True
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL

Additional JDBC Parameters	""
Authenticate using Azure Active Directory	false
Use alternate schema	false
Schema	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options

```
[{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=DELIVERY_TYPE,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=ORDER_STATUS,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=SUPPLIED_BY_ID,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=ORDER_TYPE, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=CUSTOMER_ID, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DELIVER_TO_ID, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DISTRIBUTION_FROM_ID, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=SUPPLIED_BY_NAME, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DISTRIBUTE_FROM_NAME, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=CUSTOMER_NAME, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DELIVER_TO_NAME, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=SUPPLIED_BY_LOCATION_CODE, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=DISTRIBUTE_FROM_LOCATION_CODE,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=STATUS, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=USER_NAME, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=EMAIL,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=REQUEST_DATE,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=TRACKING_NUMBER,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=CREATED_BY, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=CREATION_DATE, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=LAST_UPDATED_BY, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=LAST_UPDATE_DATE, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=LAST_UPDATE_LOGIN, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=PO_NUMBER, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE1,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE2, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=ATTRIBUTE3, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE4,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE5, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=ATTRIBUTE6, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE7,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE8, UPDATE_KEY=false,
DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true},
{SCHEMA_COLUMN=ATTRIBUTE9, UPDATE_KEY=false, DELETE_KEY=false,
UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE10,
UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true,
INSERTABLE=true}]
```

Ignore date out of range	false
Debug query mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	XXCER_BLDHUB_SO_STG_HDR
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tDBOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	Integer			true	
DELIVERY_TYPE	false	String			true	
ORDER_STATUS	false	String			true	
SUPPLIED_BY_ID	false	Integer			true	
ORDER_TYPE	false	String			true	
CUSTOMER_ID	false	Integer			true	

DELIVER_TO_ID	false	Integer			true	
DISTRIBUTION_FROM_ID	false	Integer			true	
SUPPLIED_BY_NAME	false	String			true	
DISTRIBUTE_FROM_NAME	false	String			true	
CUSTOMER_NAME	false	String			true	
DELIVER_TO_NAME	false	String			true	
SUPPLIED_BY_LOCATION_CODE	false	String			true	
DISTRIBUTE_FROM_LOCATION_CODE	false	String			true	
STATUS	false	String			true	
USER_NAME	false	String			true	
EMAIL	false	String			true	
REQUEST_DATE	false	String			true	
TRACKING_NUMBER	false	String			true	
CREATED_BY	false	Integer			true	
CREATION_DATE	false	java.util.Date			true	
LAST_UPDATED_BY	false	Integer			true	
LAST_UPDATE_DATE	false	java.util.Date			true	

LAST_UPDATE_LOGIN	false	Integer			true	
PO_NUMBER	false	String			true	
ATTRIBUTE1	false	String			true	
ATTRIBUTE2	false	String			true	
ATTRIBUTE3	false	String			true	
ATTRIBUTE4	false	String			true	
ATTRIBUTE5	false	String			true	
ATTRIBUTE6	false	String			true	
ATTRIBUTE7	false	String			true	
ATTRIBUTE8	false	String			true	
ATTRIBUTE9	false	String			true	
ATTRIBUTE10	false	String			true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_2	INPUT(S)	tMap_2
	LABEL	XXCER_BLDHUB_SO_FLMENT_STG	OUTPUT(S)	none

Component Parameters:

Properties	Values
------------	--------

Database	tMSSqlOutput
Unique Name	tDBOutput_2
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\libjava
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	true

Component List	tDBConnection_1
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL
Username	""
Password	**
Table	"XXCER_BLDHUB_SO_FLMENT_STG"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	True
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""

Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Authenticate using Azure Active Directory	false
Use alternate schema	false
Schema	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	<pre>[{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ORDER_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CUSTOMER_EXT_KEY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TRANSACTION_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TRANSACTION_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=HDR_TAG_LIST, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LINE_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRODUCT_CODE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=BLOOD_TYPE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=INVENTORY_TYPE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PRODUCT_PRICE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=PROD_EXP_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=UNIT_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CMV, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=HGB_S, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ORD_VER_EXC_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LNE_TAG_LIST, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ANTIGENS, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CREATED_BY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=CREATION_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LAST_UPDATED_BY, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LAST_UPDATE_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LAST_UPDATE_LOGIN, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE1, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE2, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE3, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE4, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE5, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE6, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE7, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE8, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE9, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ATTRIBUTE10, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]</pre>
Ignore date out of range	false
Debug query mode	false

Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	XXCER_BLDHUB_SO_FLMENT_STG
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	


Schema for tDBOutput_2 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	Integer			true	
ORDER_ID	false	Integer			true	
CUSTOMER_EXT_KEY	false	String			true	
TRANSACTION_NUMBER	false	String			true	
TRANSACTION_DATE	false	String			true	
HDR_TAG_LIST	false	String			true	
LINE_ID	false	Integer			true	
PRODUCT_CODE	false	String			true	

BLOOD_TYPE	false	String			true	
INVENTORY_TYPE	false	String			true	
PRODUCT_PRICE	false	Integer			true	
PROD_EXP_DATE	false	String			true	
UNIT_NUMBER	false	String			true	
CMV	false	String			true	
HGB_S	false	String			true	
ORD_VER_EXC_ID	false	Integer			true	
LNE_TAG_LIST	false	String			true	
ANTIGENS	false	String			true	
CREATED_BY	false	Integer			true	
CREATION_DATE	false	java.util.Date			true	
LAST_UPDATED_BY	false	Integer			true	
LAST_UPDATE_DATE	false	java.util.Date			true	
LAST_UPDATE_LOGIN	false	Integer			true	
ATTRIBUTE1	false	String			true	
ATTRIBUTE2	false	String			true	

ATTRIBUTE3	false	String			true	
ATTRIBUTE4	false	String			true	
ATTRIBUTE5	false	String			true	
ATTRIBUTE6	false	String			true	
ATTRIBUTE7	false	String			true	
ATTRIBUTE8	false	String			true	
ATTRIBUTE9	false	String			true	
ATTRIBUTE10	false	String			true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_3	INPUT(S)	tMap_3
	LABEL	XXCER_BLDHUB_ORD_VRFC_EXCEP	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_3
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server

Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\libjava
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""

Database	""
Database Driver	MSSQL
Username	""
Password	**
Table	"XXCER_BLDHUB_ORD_VRFC_EXCEP"
Action on table	TRUNCATE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	True
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Authenticate using Azure Active Directory	false
Use alternate schema	false


Schema	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false
Field options	[[{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=ORDER_ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=BLOOD_TYPE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=LAST_UPDATE_DATE, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}]]
Ignore date out of range	false
Debug query mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	XXCER_BLDHUB_ORD_VRFC_EXCEP
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_3 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

ID	false	Integer			true	
ORDER_ID	false	Integer			true	
BLOOD_TYPE	false	String			true	
LAST_UPDATE_DATE	false	java.util.Date			true	

Original Function Parameters:
Component tMSSqlOutput

	UNIQUE NAME	tDBOutput_4	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Database	tMSSqlOutput
Unique Name	tDBOutput_4
Component Name	tMSSqlOutput
Version	0.102 (ALPHA)
Family	Databases/DB Specifics/MS_SQL_Server
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false

tStatCatcher Statistics	false
Help	org.talend.help.tMSSqlOutput
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Use an existing connection	true
Component List	tDBConnection_1
JDBC Provider	JTDS
Host	""
Port	"1433"
Schema	""
Database	""
Database Driver	MSSQL
Username	""
Password	**
Table	"XXCER_BLDHUB_SO_TRACK_NUM_STG"


Action on table	NONE
Turn on Identity insert	false
Action on data	INSERT
Specify identity field	false
Identity field	ID
Start value	1
Step	1
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Reject Schema	Built-In
Specify a data source alias	false
Data source alias	""
Die on error	false
Mapping	id_MSSQL
Additional JDBC Parameters	""
Authenticate using Azure Active Directory	false
Use alternate schema	false
Schema	""
Encoding	"ISO-8859-15"
Commit every	10000
Additional columns	[]
Use field options	false

Field options	{SCHEMA_COLUMN=ID, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}, {SCHEMA_COLUMN=TRACKING_NUMBER, UPDATE_KEY=false, DELETE_KEY=false, UPDATABLE=true, INSERTABLE=true}}
Ignore date out of range	false
Debug query mode	false
Support null in "SQL WHERE" statement	false
Use Batch Size	true
Batch Size	10000
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tDBOutput_4 :

Column	Key	Type	Length	Precision	Nullable	Comment
ID	false	Integer			true	
TRACKING_NUMBER	false	String			true	

Original Function Parameters:
Component tFileCopy

	UNIQUE NAME	tFileCopy_1	INPUT(S)	tFileList_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none
--	-------	-----------------	-----------	------

Component Parameters:


Properties	Values
Unique Name	tFileCopy_1
Component Name	tFileCopy
Version	0.102 (ALPHA)
Family	File/Management
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileCopy
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2

PARALLELIZE_KEEP_EMPTY	false
File Name	((String)globalMap.get("tFileList_1_CURRENT_FILEPATH"))
Copy a directory	false
Source directory	"C:/TSC_V7.2.1/Talend-Studio-20190620_1446-V7.2.1/workspace"
Destination directory	context.target_csv_path
Rename	false
Destination filename	"NewName.temp"
Remove source file	true
Replace existing file	true
Create the directory if it doesn't exist	true
Fail on error	false
Force copy instead of move	true
Preserve last modified time	true
Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tFileCopy_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
--------	-----	------	--------	-----------	----------	---------

Original Function Parameters:
Component tFileInputExcel

	UNIQUE NAME	tFileInputExcel_1	INPUT(S)	none
	LABEL	orders_header_data	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tFileInputExcel_1
Component Name	tFileInputExcel
Version	0.102 (ALPHA)
Family	File/Input
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputExcel
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java

Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Read excel2007 file format (xlsx)	true
File name/Stream	context.csv_path+"order_header_data.xlsx"
Password	**
All sheets	true
Sheet list	[{SHEETNAME="Sheet1", USE_REGEX=}]
Header	1
Footer	0
Limit	
Affect each sheet(header&&footer)	false
First column	1
Last column	
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Schema	Built-In
Advanced separator (for numbers)	false

Thousands separator	','
Decimal separator	','
Trim all columns	false
Check column to trim	[{SCHEMA_COLUMN=id, TRIM=false}, {SCHEMA_COLUMN=delivery_type, TRIM=false}, {SCHEMA_COLUMN=order_status, TRIM=false}, {SCHEMA_COLUMN=supplied_by_id, TRIM=false}, {SCHEMA_COLUMN=type, TRIM=false}, {SCHEMA_COLUMN=customer_id, TRIM=false}, {SCHEMA_COLUMN=deliver_to_id, TRIM=false}, {SCHEMA_COLUMN=distribute_from_id, TRIM=false}, {SCHEMA_COLUMN=supplied_by_name, TRIM=false}, {SCHEMA_COLUMN=distribute_from_name, TRIM=false}, {SCHEMA_COLUMN=customer_name, TRIM=false}, {SCHEMA_COLUMN=deliver_to_name, TRIM=false}, {SCHEMA_COLUMN=supplied_by_location_code, TRIM=false}, {SCHEMA_COLUMN=distribute_from_location_code, TRIM=false}, {SCHEMA_COLUMN=status, TRIM=false}, {SCHEMA_COLUMN=user_name, TRIM=false}, {SCHEMA_COLUMN=user_email, TRIM=false}]
Convert date column to string	false
Check need convert date column	[{SCHEMA_COLUMN=id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=delivery_type, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=order_status, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=supplied_by_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=type, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=customer_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=deliver_to_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=distribute_from_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=supplied_by_name, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=distribute_from_name, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=customer_name, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=deliver_to_name, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=supplied_by_location_code, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=distribute_from_location_code, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=status, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=user_name, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=user_email, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}]
Encoding	"UTF-8"
Read real values for numbers	false
Stop reading on encountering empty rows	false
Don't validate the cells	false

Ignore the warning	false
Generation mode	USER_MODE
Include phonetic runs	true
Label format	orders_header_data
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	Integer	7		true	
delivery_type	false	String	7		true	
order_status	false	String	9		true	
supplied_by_id	false	Integer	5		true	
type	false	String	5		true	
customer_id	false	Integer	5		true	
deliver_to_id	false	Integer	5		true	
distribute_from_id	false	Integer	5		true	

supplied_by_name	false	String	27		true	
distribute_from_name	false	String	27		true	
customer_name	false	String	27		true	
deliver_to_name	false	String	27		true	
supplied_by_location_code	false	String			true	
distribute_from_location_code	false	String			true	
status	false	String	10		true	
user_name	false	String	16		true	
user_email	false	String	21		true	

Original Function Parameters:
Component tFileInputExcel

	UNIQUE NAME	tFileInputExcel_2	INPUT(S)	none
	LABEL	fulfillment_data	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tFileInputExcel_2
Component Name	tFileInputExcel
Version	0.102 (ALPHA)
Family	File/Input

Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputExcel
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Read excel2007 file format (xlsx)	true
File name/Stream	context.csv_path+"fulfillment_data.xlsx"
Password	**
All sheets	true
Sheet list	[{SHEETNAME="Sheet1", USE_REGEX=}]

Header	1
Footer	0
Limit	
Affect each sheet(header&&footer)	false
First column	1
Last column	
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Schema	Built-In
Advanced separator (for numbers)	false
Thousands separator	','
Decimal separator	'.'
Trim all columns	false
Check column to trim	[[{SCHEMA_COLUMN=id, TRIM=false}, {SCHEMA_COLUMN=order_id, TRIM=false}, {SCHEMA_COLUMN=customer_external_key, TRIM=false}, {SCHEMA_COLUMN=transaction_number, TRIM=false}, {SCHEMA_COLUMN=transaction_date_time, TRIM=false}, {SCHEMA_COLUMN=id1, TRIM=false}, {SCHEMA_COLUMN=product_code, TRIM=false}, {SCHEMA_COLUMN=order_verification_exception_id, TRIM=false}]]
Convert date column to string	false
Check need convert date column	[[{SCHEMA_COLUMN=id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=order_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=customer_external_key, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=transaction_number, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=transaction_date_time, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=id1, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=product_code, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=order_verification_exception_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}]]
Encoding	"UTF-8"


Read real values for numbers	false
Stop reading on encountering empty rows	false
Don't validate the cells	false
Ignore the warning	false
Generation mode	USER_MODE
Include phonetic runs	true
Label format	fulfillment_data
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	Integer	7		true	
order_id	false	Integer	7		true	
customer_external_key	false	String	5		true	
transaction_number	false	String	1		true	
transaction_date_time	false	String	25		true	

id1	false	Integer	8		true	
product_code	false	String	8		true	
order_verification_exception_id	false	Integer	8		true	

Original Function Parameters:
Component tFileInputExcel

	UNIQUE NAME	tFileInputExcel_3	INPUT(S)	none
	LABEL	blood_type_data	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tFileInputExcel_3
Component Name	tFileInputExcel
Version	0.102 (ALPHA)
Family	File/Input
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputExcel

Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Read excel2007 file format (xlsx)	true
File name/Stream	context.csv_path+"bloodtype_data.xlsx"
Password	**
All sheets	true
Sheet list	[{SHEETNAME="Sheet1", USE_REGEX=}]
Header	1
Footer	0
Limit	
Affect each sheet(header&&footer)	false
First column	1
Last column	
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true


Schema	repository: EXCEL:blood_type_data - metadata
Schema	repository: EXCEL:blood_type_data - metadata
Advanced separator (for numbers)	false
Thousands separator	','
Decimal separator	'.'
Trim all columns	false
Check column to trim	[[{SCHEMA_COLUMN=id, TRIM=false}, {SCHEMA_COLUMN=order_id, TRIM=false}, {SCHEMA_COLUMN=blood_type, TRIM=false}]]
Convert date column to string	false
Check need convert date column	[[{SCHEMA_COLUMN=id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=order_id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=blood_type, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}]]
Encoding	"UTF-8"
Read real values for numbers	false
Stop reading on encountering empty rows	false
Don't validate the cells	false
Ignore the warning	false
Generation mode	USER_MODE
Include phonetic runs	true
Label format	blood_type_data
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	

Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	Integer	8		true	
order_id	false	Integer	7		true	
blood_type	false	String	8		true	

Original Function Parameters: Component tFileInputExcel

	UNIQUE NAME	tFileInputExcel_4	INPUT(S)	none
	LABEL	tracking_num_data	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
Unique Name	tFileInputExcel_4
Component Name	tFileInputExcel
Version	0.102 (ALPHA)
Family	File/Input
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	false

Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputExcel
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Property Type	Built-In
Read excel2007 file format (xlsx)	true
File name/Stream	context.csv_path+"tracking_number_data.xlsx"
Password	**
All sheets	true
Sheet list	[{SHEETNAME="Sheet1", USE_REGEX=}]
Header	1
Footer	0
Limit	
Affect each sheet(header&&footer)	false


First column	1
Last column	
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	TRUE
Schema	Built-In
Schema	repository: EXCEL:tracking_num_data - metadata
Advanced separator (for numbers)	false
Thousands separator	','
Decimal separator	'.'
Trim all columns	false
Check column to trim	[[{SCHEMA_COLUMN=id, TRIM=false}, {SCHEMA_COLUMN=tracking_number, TRIM=false}]]
Convert date column to string	false
Check need convert date column	[[{SCHEMA_COLUMN=id, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}, {SCHEMA_COLUMN=tracking_number, CONVERTDATE=false, PATTERN="MM-dd-yyyy"}]]
Encoding	"UTF-8"
Read real values for numbers	false
Stop reading on encountering empty rows	false
Don't validate the cells	false
Ignore the warning	false
Generation mode	USER_MODE
Include phonetic runs	true
Label format	tracking_num_data

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
id	false	Integer	7		true	
tracking_number	false	String	12		true	

Original Function Parameters:
Component tFileList

	UNIQUE NAME	tFileList_1	INPUT(S)	tPostjob_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileCopy_1


Component Parameters:

Properties	Values
Unique Name	tFileList_1
Component Name	tFileList
Version	0.102 (ALPHA)
Family	File/Management Orchestration
Start	false

Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileList
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\libjava
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Directory	context.csv_path
FileList Type	FILES
Includes subdirectories	false
Case Sensitive	YES
Generate Error if no file found	false
Use Glob Expressions as Filemask (Unchecked means Perl5 Regex Expressions)	true
Files	[{FILEMASK="*.xlsx"}]

By default	true
By file name	false
By file size	false
By modified date	false
ASC	true
DESC	false
Use Exclude Filemask	false
Exclude Filemask	"*.txt"
Format file path to slash(/) style (useful on Windows)	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPostjob


	UNIQUE NAME	tPostjob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileList_1

Component Parameters:

Properties	Values
Unique Name	tPostjob_1
Component Name	tPostjob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	!!!HELP!!!
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component tPrejob


	UNIQUE NAME	tPrejob_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBConnection_1

Component Parameters:

Properties	Values
Unique Name	tPrejob_1
Component Name	tPrejob
Version	0.102 (ALPHA)
Family	Orchestration
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tPrejob
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	C:\TSC_V7.3.1\configuration\lib\java
Subjob color	255;220;180
Title color	230;100;0
Enable parallel execution	false
Number of parallel executions	2
PARALLELIZE_KEEP_EMPTY	false
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters: Component tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tFileInputExcel_1

	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_1
--	-------	-----------------	-----------	-------------

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):
Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
id	Integer		true
delivery_type	String		true
order_status	String		true
supplied_by_id	Integer		true
type	String		true
customer_id	Integer		true
deliver_to_id	Integer		true

distribute_from_id	Integer		true
supplied_by_name	String		true
distribute_from_name	String		true
customer_name	String		true
deliver_to_name	String		true
supplied_by_location_code	String		true
distribute_from_location_code	String		true
status	String		true
user_name	String		true
user_email	String		true

Constraint Table Entries(row1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (output):

Mapper table Properties(out1):

Properties	Values
Name	out1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out1):

Name	Type	Expression	isNullable
ID	Integer	row1.id	true
DELIVERY_TYPE	String	row1.delivery_type	true
ORDER_STATUS	String	row1.order_status	true
SUPPLIED_BY_ID	Integer	row1.supplied_by_id	true
ORDER_TYPE	String	row1.type	true
CUSTOMER_ID	Integer	row1.customer_id	true
DELIVER_TO_ID	Integer	row1.deliver_to_id	true

DISTRIBUTION_FROM_ID	Integer	row1.distribute_from_id	true
SUPPLIED_BY_NAME	String	row1.supplied_by_name	true
DISTRIBUTE_FROM_NAME	String	row1.distribute_from_name	true
CUSTOMER_NAME	String	row1.customer_name	true
DELIVER_TO_NAME	String	row1.deliver_to_name	true
SUPPLIED_BY_LOCATION_CODE	String	row1.supplied_by_location_code	true
DISTRIBUTE_FROM_LOCATION_CODE	String	row1.distribute_from_location_code	true
STATUS	String	row1.status	true
USER_NAME	String	row1.user_name	true
EMAIL	String	row1.user_email	true
REQUEST_DATE	String		true
TRACKING_NUMBER	String		true
CREATED_BY	Integer		true
CREATION_DATE	java.util.Date		true
LAST_UPDATED_BY	Integer		true
LAST_UPDATE_DATE	java.util.Date		true
LAST_UPDATE_LOGIN	Integer		true

PO_NUMBER	String		true
ATTRIBUTE1	String		true
ATTRIBUTE2	String		true
ATTRIBUTE3	String		true
ATTRIBUTE4	String		true
ATTRIBUTE5	String		true
ATTRIBUTE6	String		true
ATTRIBUTE7	String		true
ATTRIBUTE8	String		true
ATTRIBUTE9	String		true
ATTRIBUTE10	String		true

Constraint Table Entries(out1):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_1 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tFileInputExcel_2
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_2

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):
Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
id	Integer		true
order_id	Integer		true
customer_external_key	String		true
transaction_number	String		true
transaction_date_time	String		true
id1	Integer		true
product_code	String		true
order_verification_exception_id	Integer		true

Constraint Table Entries(row2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (output):

Mapper table Properties(out2):

Properties	Values
Name	out2
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out2):

Name	Type	Expression	isNullable
ID	Integer	row2.id	true
ORDER_ID	Integer	row2.order_id	true
CUSTOMER_EXT_KEY	String	row2.customer_external_key	true
TRANSACTION_NUMBER	String	row2.transaction_number	true
TRANSACTION_DATE	String	row2.transaction_date_time	true
HDR_TAG_LIST	String		true
LINE_ID	Integer	row2.id1	true

PRODUCT_CODE	String	row2.product_code	true
BLOOD_TYPE	String		true
INVENTORY_TYPE	String		true
PRODUCT_PRICE	Integer		true
PROD_EXP_DATE	String		true
UNIT_NUMBER	String		true
CMV	String		true
HGB_S	String		true
ORD_VER_EXC_ID	Integer	row2.order_verification_exception_id	true
LNE_TAG_LIST	String		true
ANTIGENS	String		true
CREATED_BY	Integer		true
CREATION_DATE	java.util.Date		true
LAST_UPDATED_BY	Integer		true
LAST_UPDATE_DATE	java.util.Date		true
LAST_UPDATE_LOGIN	Integer		true
ATTRIBUTE1	String		true

ATTRIBUTE2	String		true
ATTRIBUTE3	String		true
ATTRIBUTE4	String		true
ATTRIBUTE5	String		true
ATTRIBUTE6	String		true
ATTRIBUTE7	String		true
ATTRIBUTE8	String		true
ATTRIBUTE9	String		true
ATTRIBUTE10	String		true

Constraint Table Entries(out2):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tFileInputExcel_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_3

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):

Mapper table Properties(row3):

Properties	Values
Name	row3
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row3):

Name	Type	Expression	isNullable
id	Integer		true
order_id	Integer		true
blood_type	String		true

Constraint Table Entries(row3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (output):

Mapper table Properties(out3):

Properties	Values
Name	out3
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out3):

Name	Type	Expression	isNullable
ID	Integer	row3.id	true
ORDER_ID	Integer	row3.order_id	true
BLOOD_TYPE	String	row3.blood_type	true
LAST_UPDATE_DATE	java.util.Date		true

Constraint Table Entries(out3):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_3 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null


Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Component tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tFileInputExcel_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tDBOutput_4

Component Parameters:

Properties	Values
------------	--------

tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
id	Integer		true
tracking_number	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (output):

Mapper table Properties(out4):

Properties	Values
Name	out4
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(out4):

Name	Type	Expression	isNullable
ID	Integer	row4.id	true
TRACKING_NUMBER	String	row4.tracking_number	true

Constraint Table Entries(out4):

Name	Type	Expression	isNullable
------	------	------------	------------

Mapper table for tMap_4 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------

Constraint Table Entries(Var):

Name	Type	Expression	isNullable
------	------	------------	------------