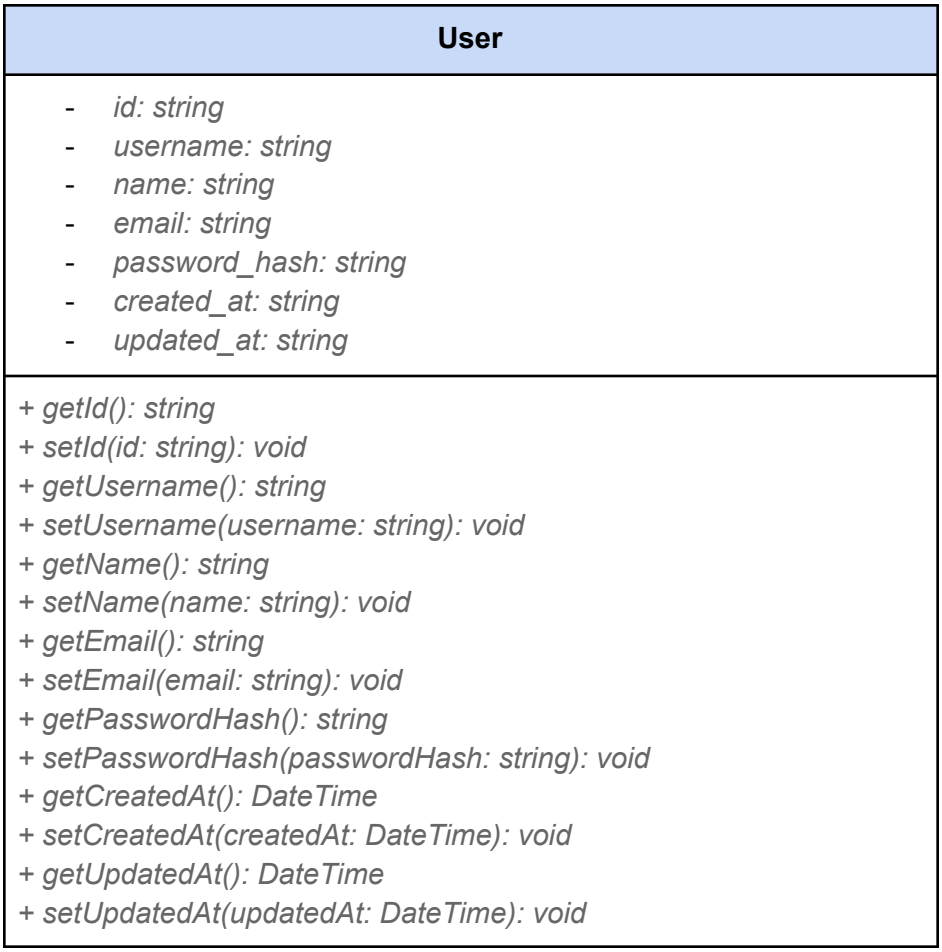
Project ClassDiagram

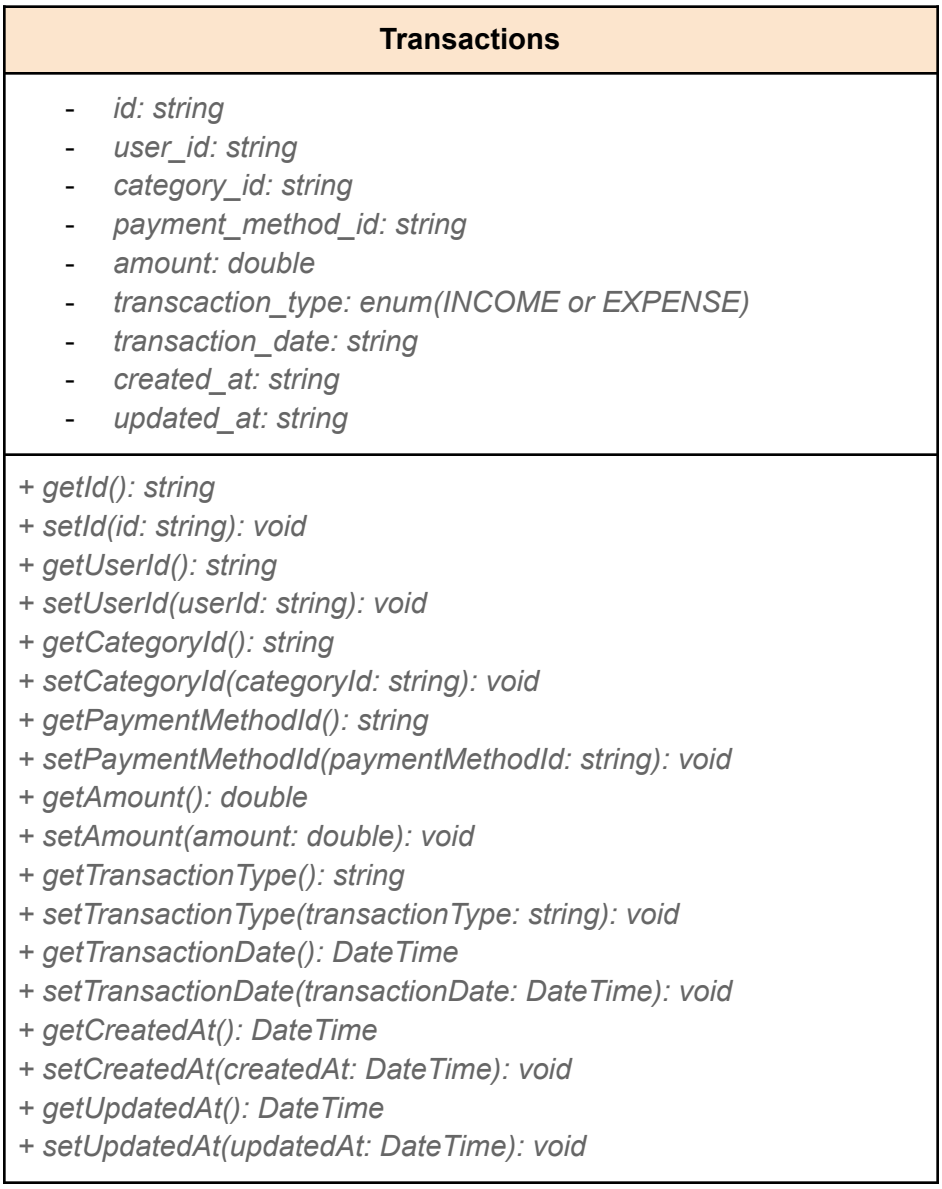
Questions:

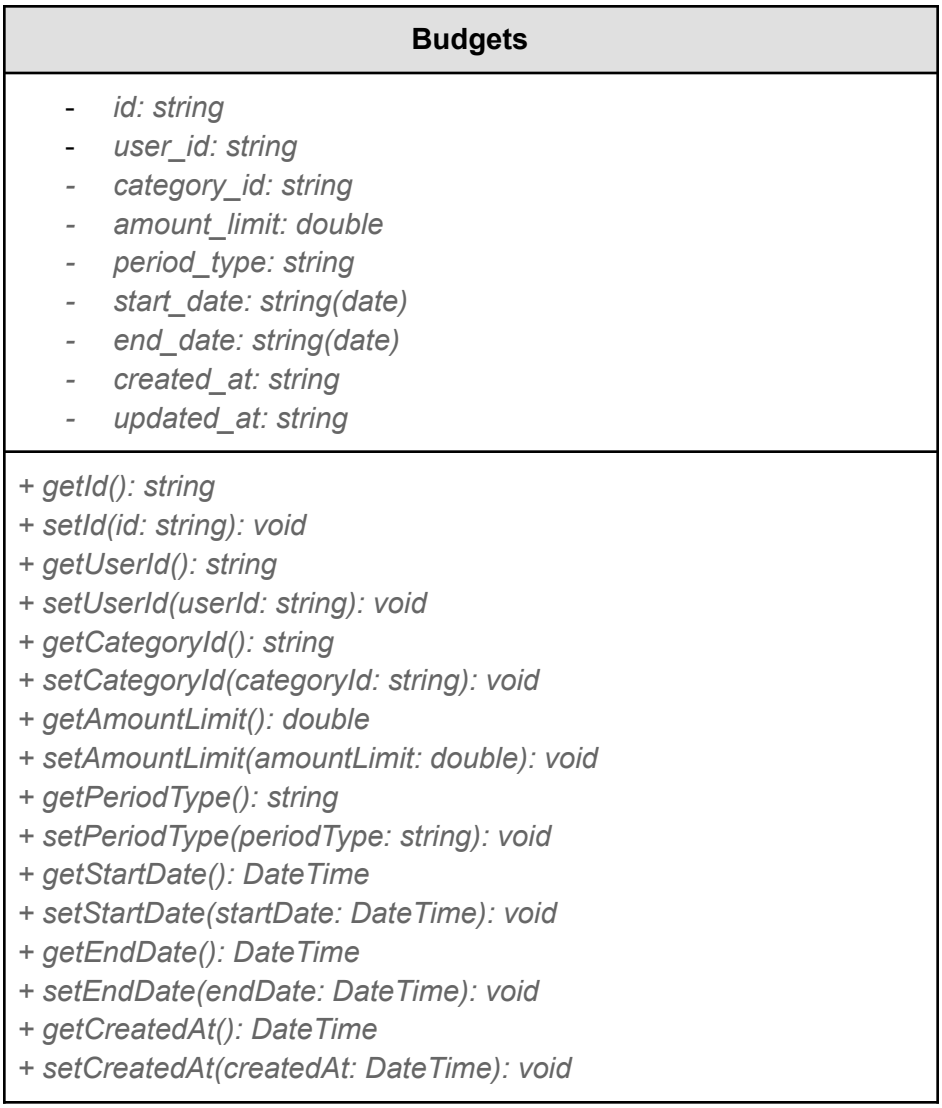
- USER ENTITY:
  - Do we need an updated_at for user?
- CATEGORY ENTITY:
  - User_id needs to be in this? Or only transaction will track this? And we will use budget entity to pull transactions that pull category_id, for a specific user tailored budget plan?)
- PAYMENT_METHOD ENTITY:
  - Looks Good?
- BUDGETS ENTITY:
  - Does it need category_id, or tie that to each transaction?
- TRANSACTION ENTITY:
  - Category_id tied in here, so each transaction tracks category of each user spending or income transaction. (Then category_id is only for spending transactions, null if transaction type = income(deposit)) and I guess withdrawal can be a transaction as well? Where transaction_type = spending, and so category_id = withdraw?
- SESSION ENTITY:
  - Looks Good?

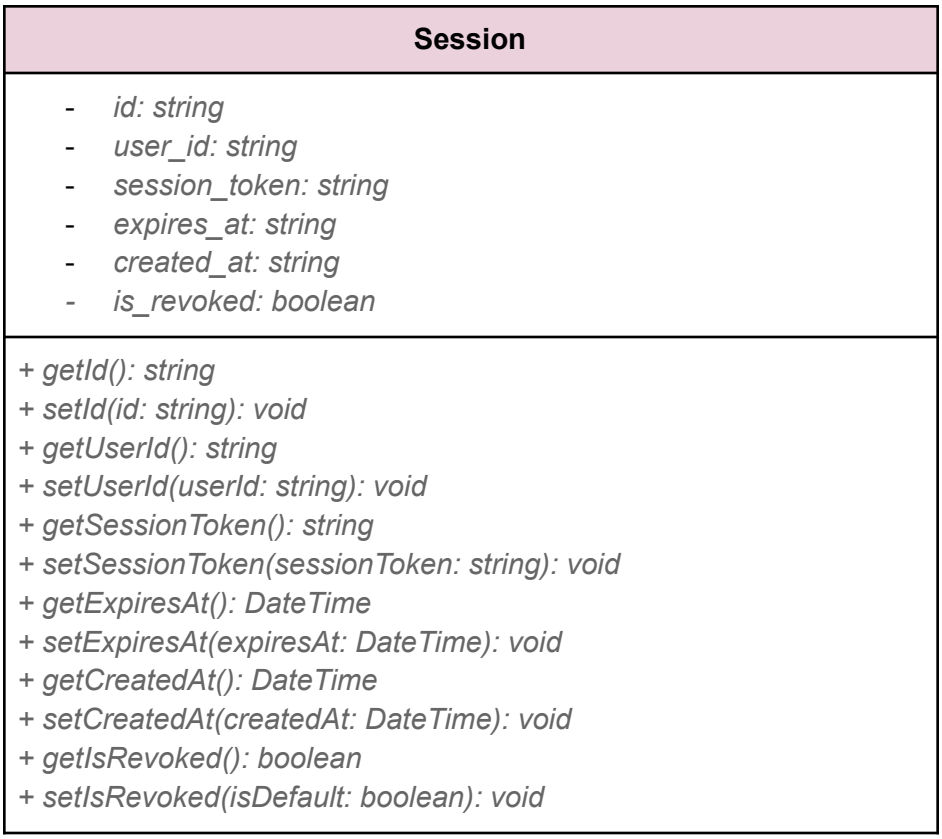


Category
- *id: string* - *type: string*
+ getId(): string *+ setId(id: string): void* *+ getType(): string* *+ setType(type: string): void*

Payment Methods
- *id: string* - *user_id: string* - *nickname: string* - *card_last4: string* - *card_network: enum(VISA, MASTER, etc..)* - *expire_date: string* - *is_default: boolean* - *created_at: string*
+ getId(): string *+ setId(id: string): void* *+ getUserId(): string* *+ setUserId(userId: string): void* *+ getNickname(): string* *+ setNickname(nickname: string): void* *+ getCardLast4(): string* *+ setCardLast4(cardLast4: string): void* *+ getCardNetwork(): enum* *+ setCardNetwork(cardNetwork: enum): void* *+ getExpireDate(): DateTime* *+ setExpireDate(expireDate: DateTime): void* *+ getIsDefault(): boolean* *+ setIsDefault(isDefault: boolean): void* *+ getCreatedAt(): DateTime* *+ setCreatedAt(createdAt: DateTime): void*


Transactions
- id: string
- user_id: string
- category_id: string
- payment_method_id: string
- amount: double
- transcaction_type: enum(INCOME or EXPENSE)
- transaction_date: string
- created_at: string
- updated_at: string
+ getId(): string
+ setId(id: string): void
+ getUserId(): string
+ setUserId(userId: string): void
+ getCategoryId(): string
+ setCategoryId(categoryId: string): void
+ getPaymentMethodId(): string
+ setPaymentMethodId(paymentMethodId: string): void
+ getAmount(): double
+ setAmount(amount: double): void
+ getTransactionType(): string
+ setTransactionType(transactionType: string): void
+ getTransactionDate(): DateTime
+ setTransactionDate(transactionDate: DateTime): void
+ getCreatedAt(): DateTime
+ setCreatedAt(createdAt: DateTime): void
+ getUpdatedAt(): DateTime
+ setUpdatedAt(updatedAt: DateTime): void


Budgets
- id: string
- user_id: string
- category_id: string
- amount_limit: double
- period_type: string
- start_date: string(date)
- end_date: string(date)
- created_at: string
- updated_at: string
+ getId(): string
+ setId(id: string): void
+ getUserId(): string
+ setUserId(userId: string): void
+ getCategoryId(): string
+ setCategoryId(categoryId: string): void
+ getAmountLimit(): double
+ setAmountLimit(amountLimit: double): void
+ getPeriodType(): string
+ setPeriodType(periodType: string): void
+ getStartDate(): DateTime
+ setStartDate(startDate: DateTime): void
+ getEndDate(): DateTime
+ setEndDate(endDate: DateTime): void
+ getCreatedAt(): DateTime
+ setCreatedAt(createdAt: DateTime): void


Session
- id: string
- user_id: string
- session_token: string
- expires_at: string
- created_at: string
- is_revoked: boolean
+ getId(): string
+ setId(id: string): void
+ getUserId(): string
+ setUserId(userId: string): void
+ getSessionToken(): string
+ setSessionToken(sessionToken: string): void
+ getExpiresAt(): DateTime
+ setExpiresAt(expiresAt: DateTime): void
+ getCreatedAt(): DateTime
+ setCreatedAt(createdAt: DateTime): void
+ getIsRevoked(): boolean
+ setIsRevoked(isDefault: boolean): void