
Order id: int date: int subtotal: double tax_amount: double total: double «property get» + get_id(): var get_date(): var get_subtotal(): var get_tax_amount(): var get_total(): var «property set» set_id(var): void set_date(var): void Dish set_subtotal(var): void set_tax_amount(var): void id: int set_total(var): void name: string description: string price: double «property get» get_name(): var get_description(): var Measurement get_price(): var get_id(): var «property set» set_name(var): void set_description(var): void set_price(var): void set_id(var): void Ingredient Information id: int description: string «property get» get_id(): var get_description(): «property set» set_id(var): void set_description(va Stock Warehouse quantity: int «property get» get_quantity(): var «property set» set_quantity(var): void Movement

id: int date: int

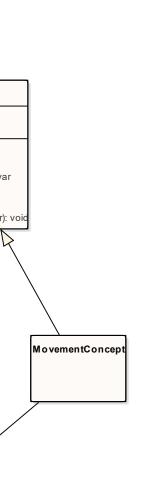

quarraty. Int

«property get»

- + get_quantity(): var + get_date(): var + get_id(): var

«property set»

- + set_quantity(var): void + set_date(var): void + set_id(var): void