

```
In [3]: # Histogram without KDE
sns.displot(data=tips, x='total_bill', kde=False)
plt.show()

# Joint plot
sns.jointplot(data=tips, x='tip', y='total_bill')
plt.show()

# Regression plot
sns.jointplot(data=tips, x='tip', y='total_bill', kind='reg')
plt.show()

# Hexagonal plot
sns.jointplot(data=tips, x='tip', y='total_bill', kind='hex')
plt.show()

# Pair plot
sns.pairplot(data=tips, vars=['total_bill', 'tip', 'size'])
plt.show()

# Pair plot by time
sns.pairplot(data=tips, vars=['total_bill', 'tip', 'size'], hue='time')
plt.show()

# Pair plot by day
sns.pairplot(data=tips, vars=['total_bill', 'tip', 'size'], hue='day')
plt.show()

# Correlation heatmap
sns.heatmap(tips.corr(numeric_only=True), annot=True)
plt.show()

# Box plots
sns.boxplot(data=tips, x='total_bill')
plt.show()

sns.boxplot(data=tips, x='tip')
plt.show()

# Count plots
sns.countplot(data=tips, x='day')
plt.show()

sns.countplot(data=tips, y='sex')
plt.show()

sns.countplot(data=tips, x='time')
plt.show()

sns.countplot(data=tips, x='smoker')
plt.show()


sns.countplot(data=tips, x='size')
plt.show()


# Pie chart
tips['sex'].value_counts().plot(kind='pie', autopct='%1.1f%%')
plt.ylabel('')
```


```
plt.show()

# Bar chart
tips['sex'].value_counts().plot(kind='bar')
plt.show()


# Value counts
print(tips['time'].value_counts())
```

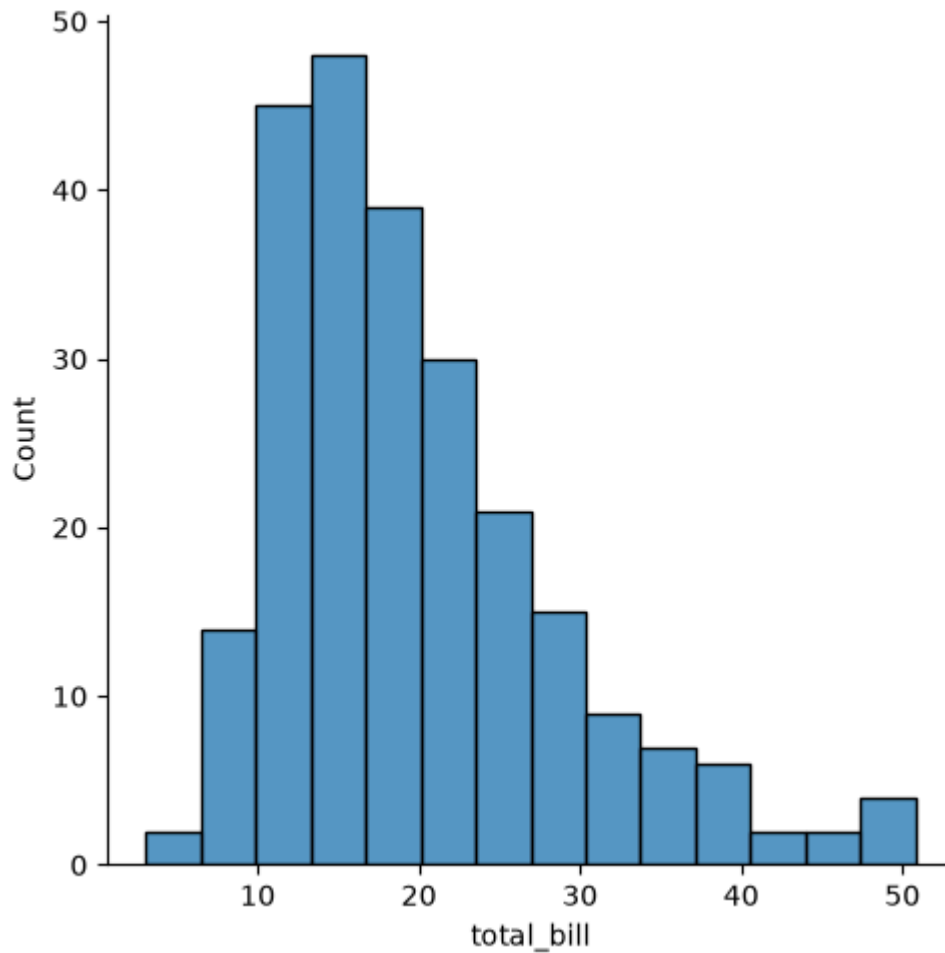



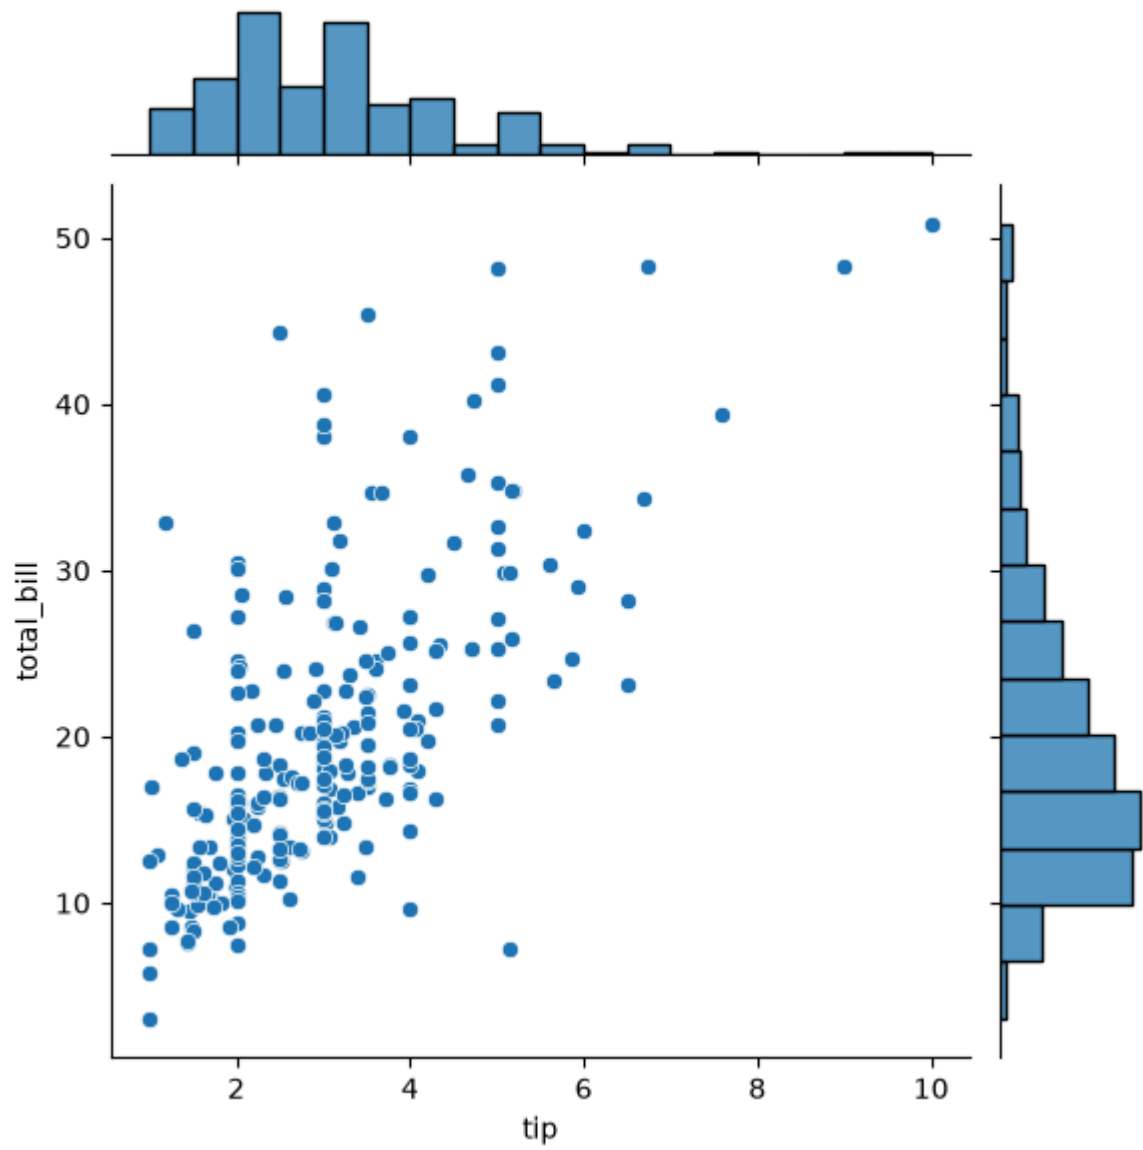



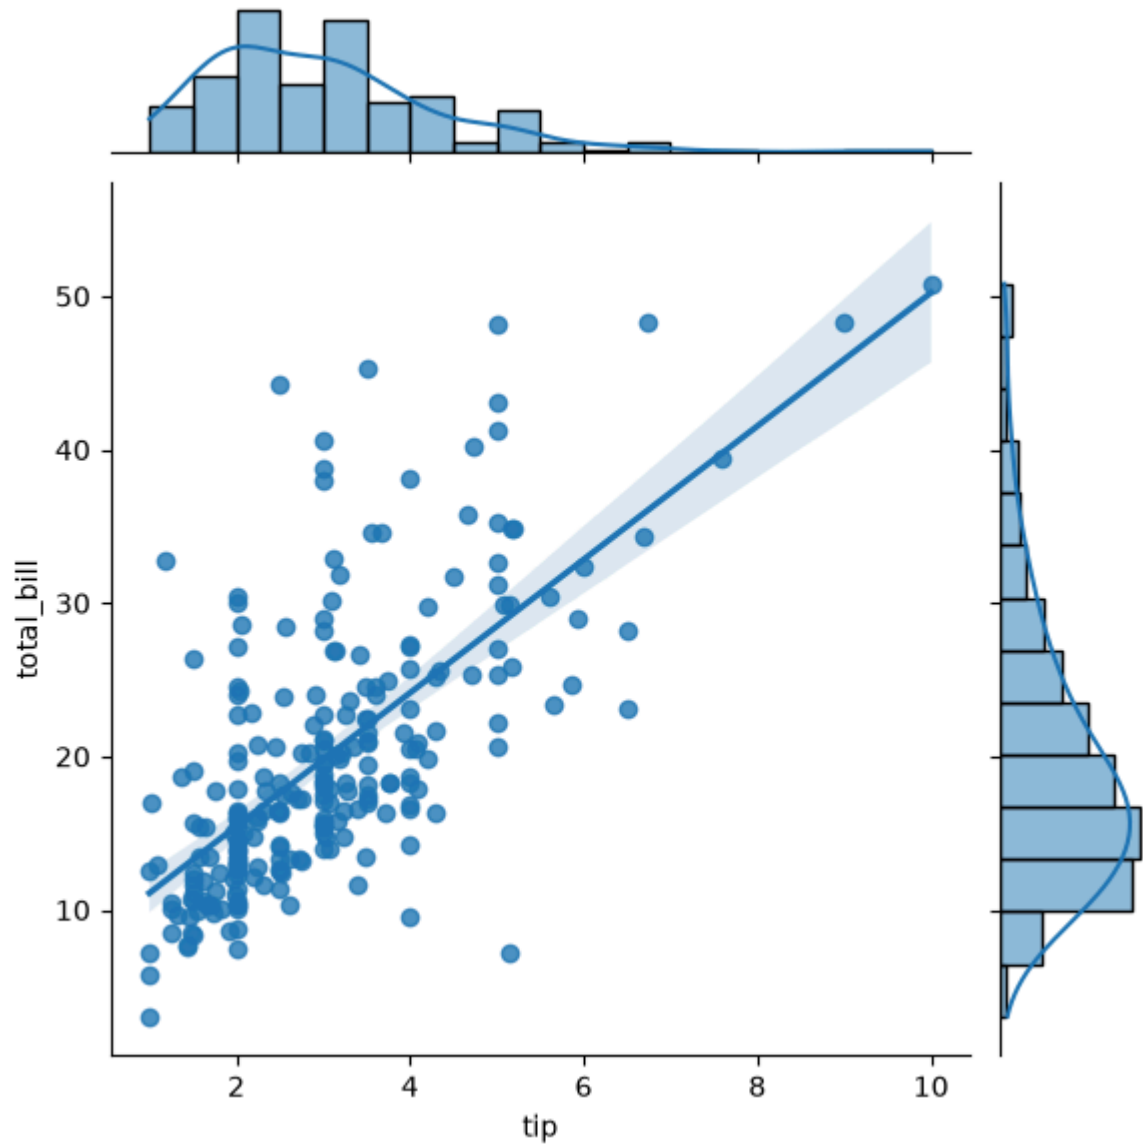







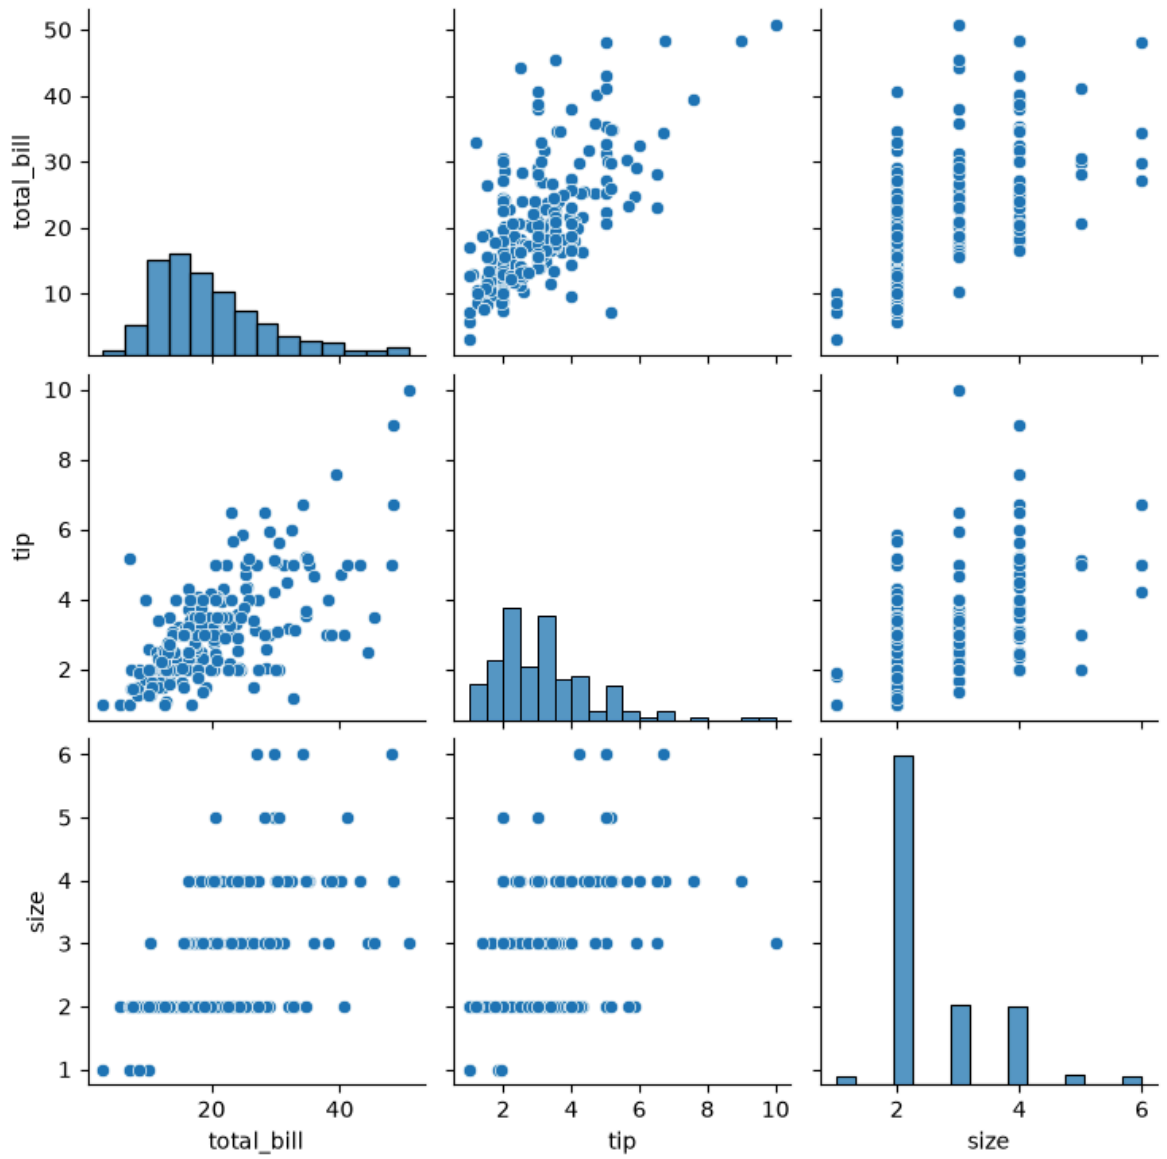



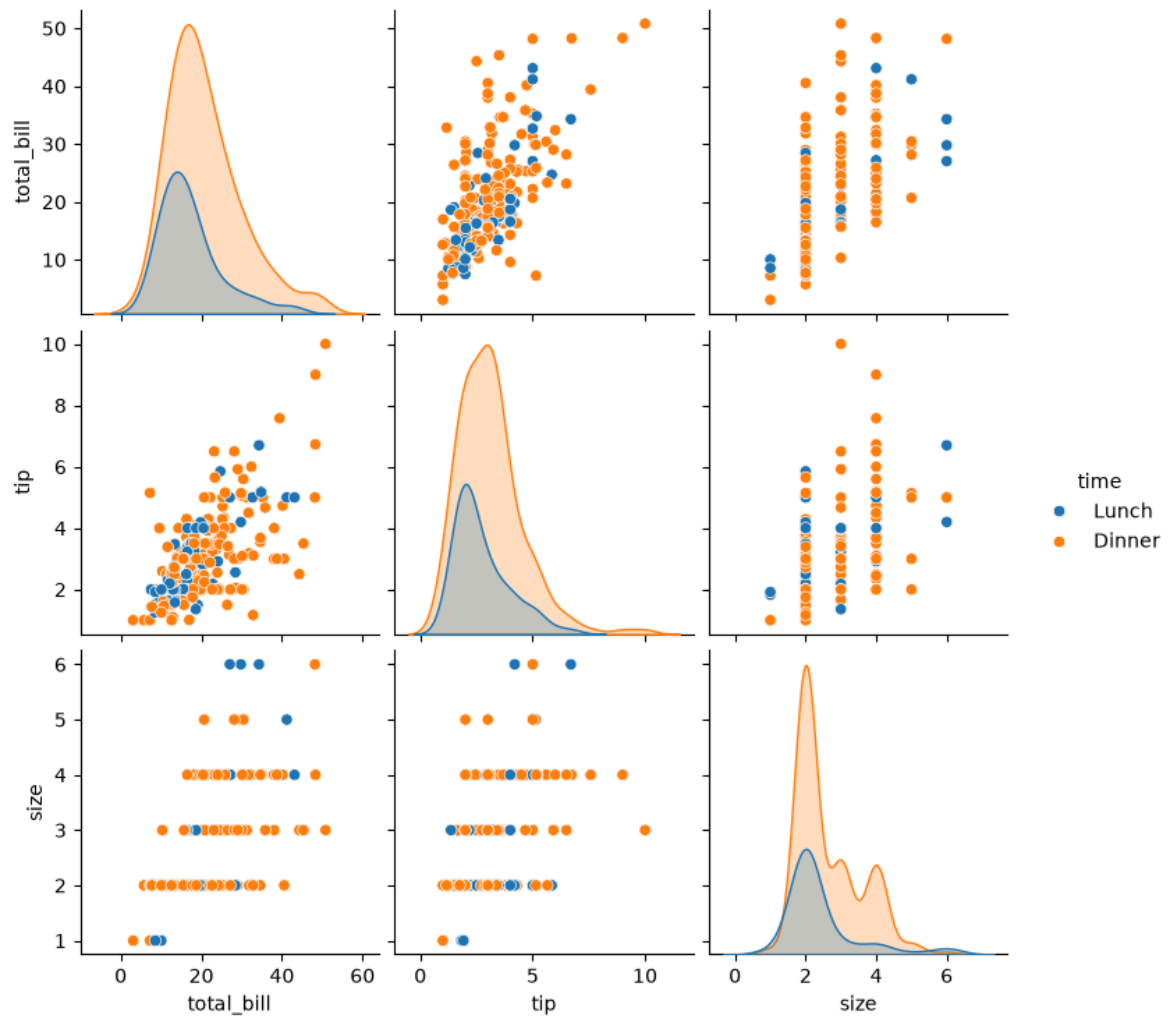


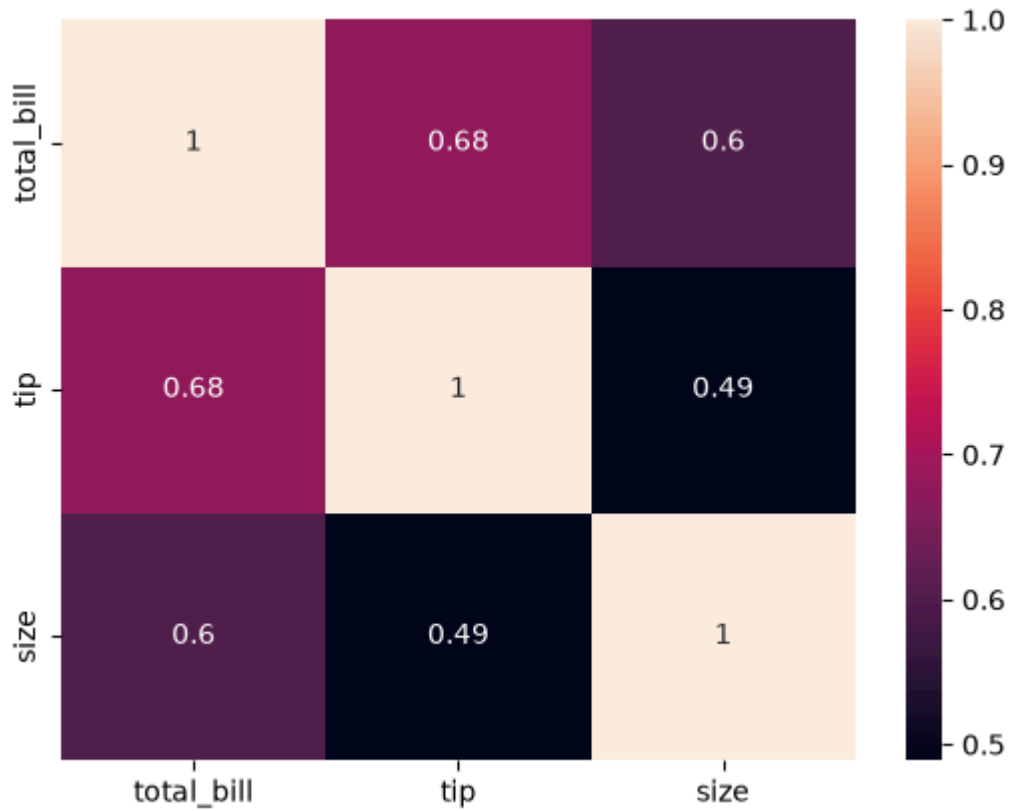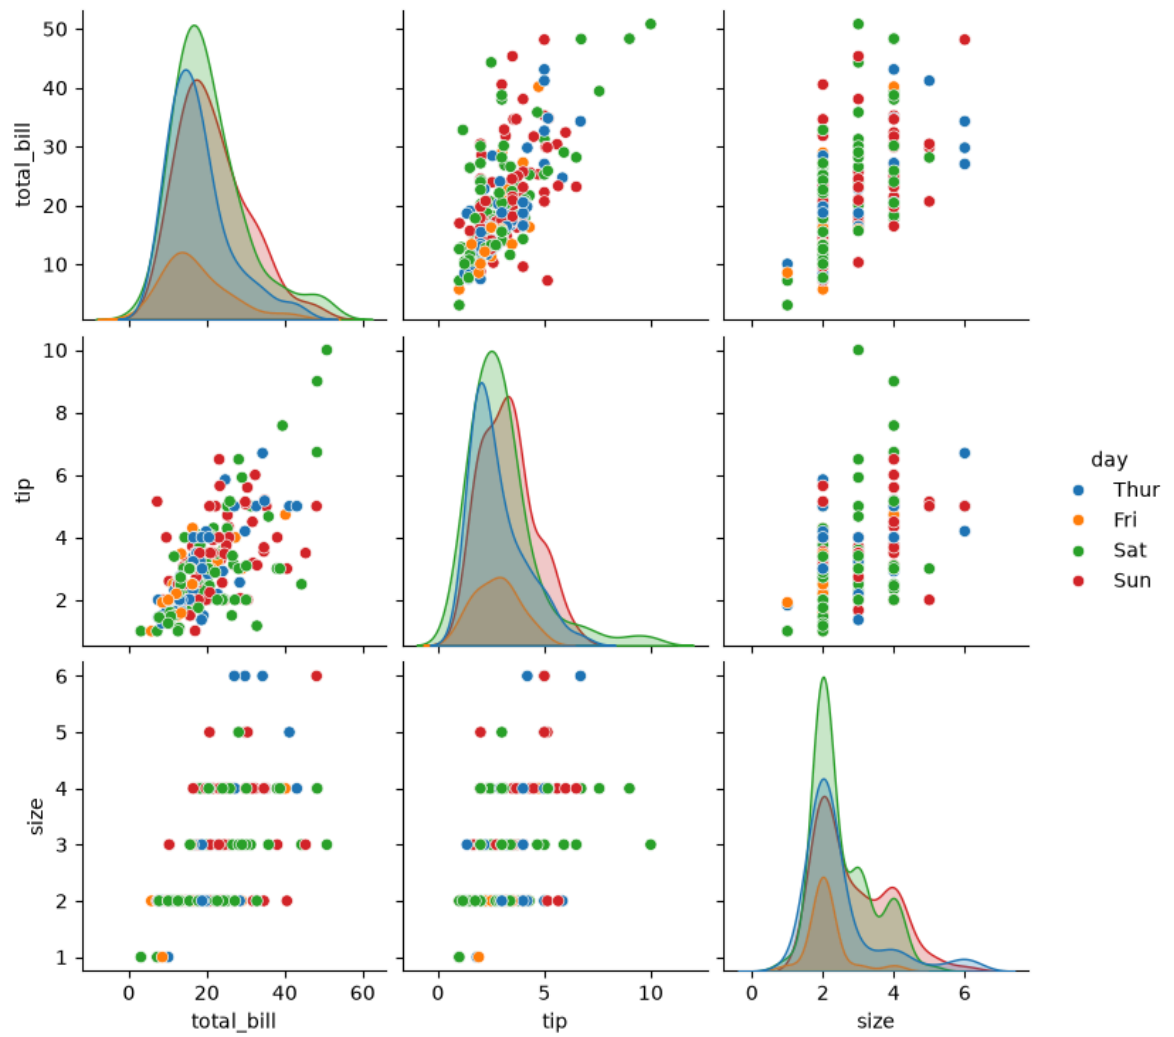


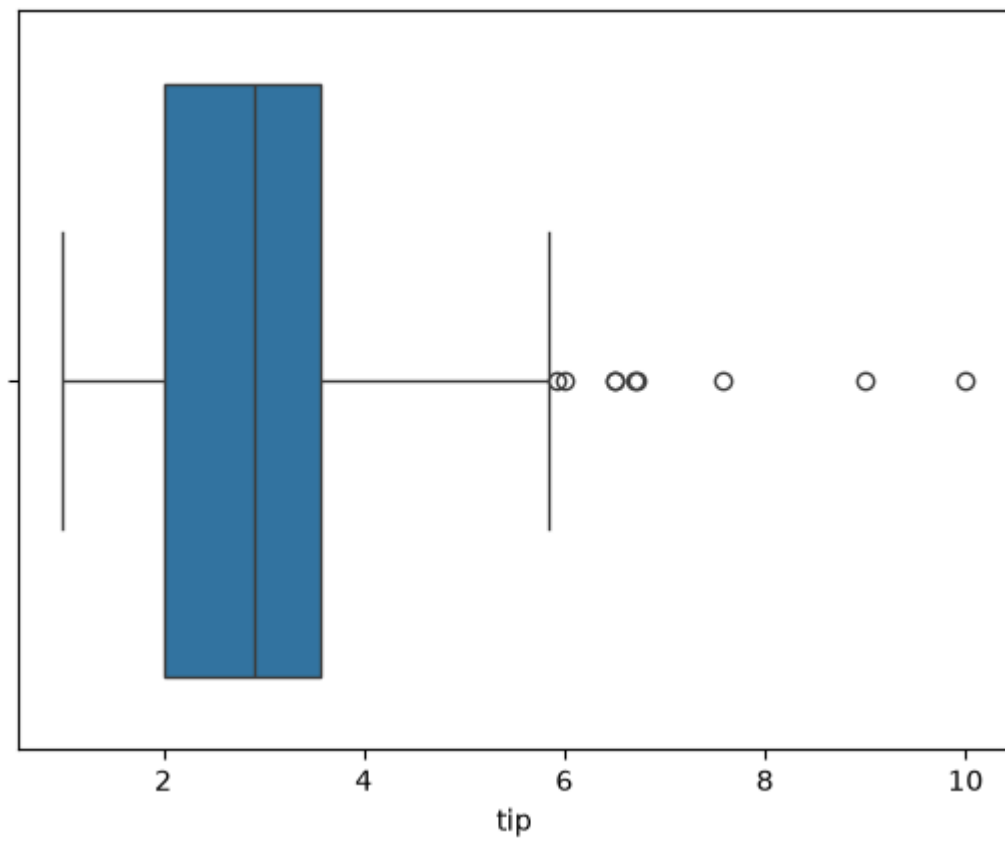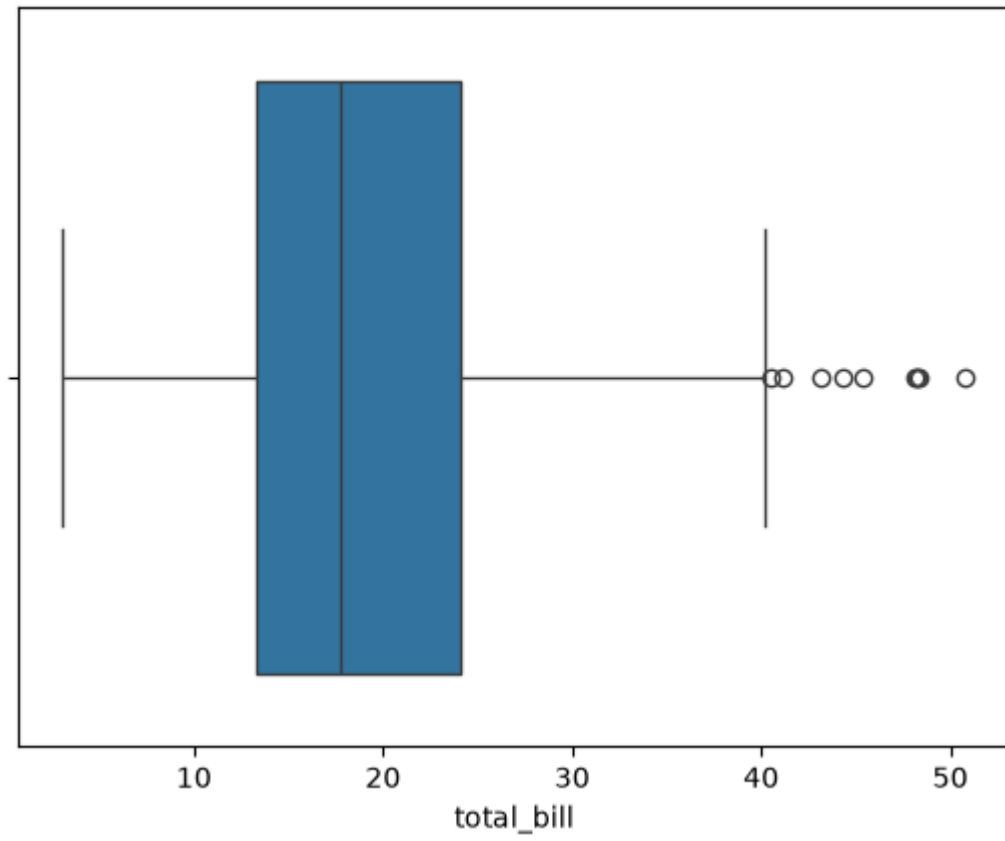

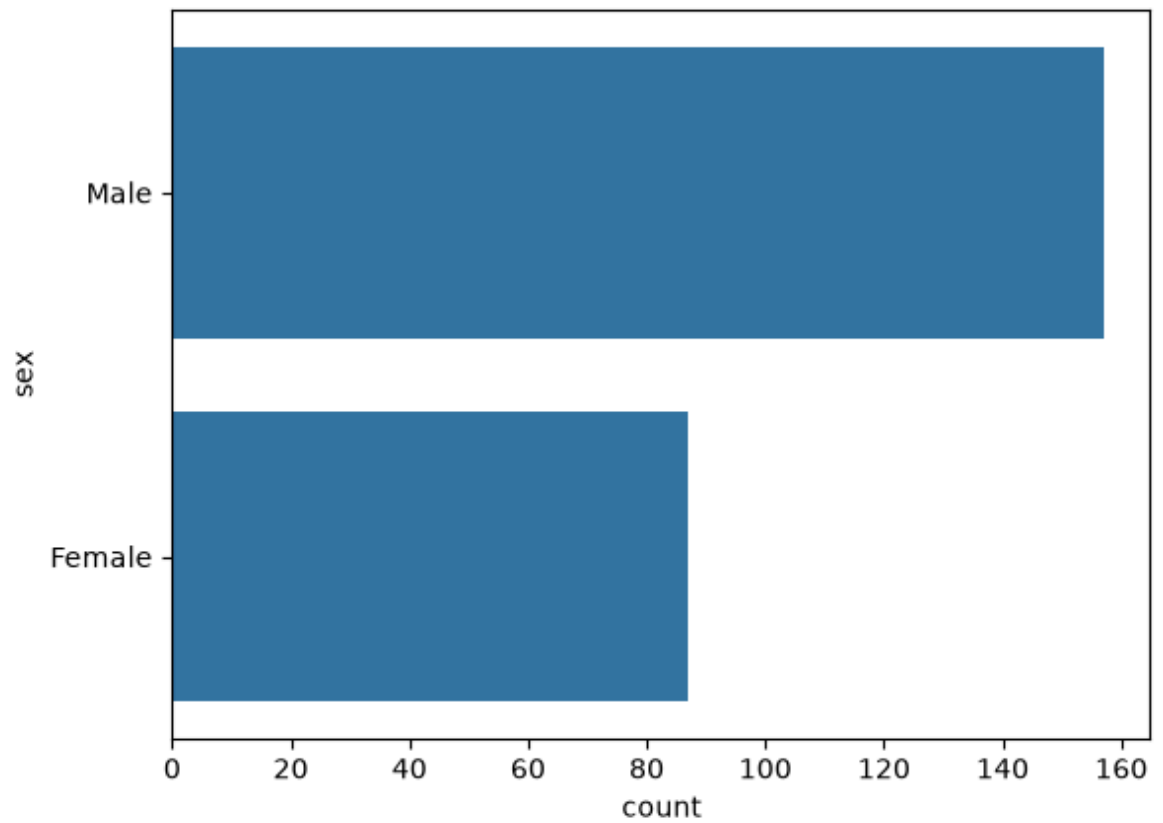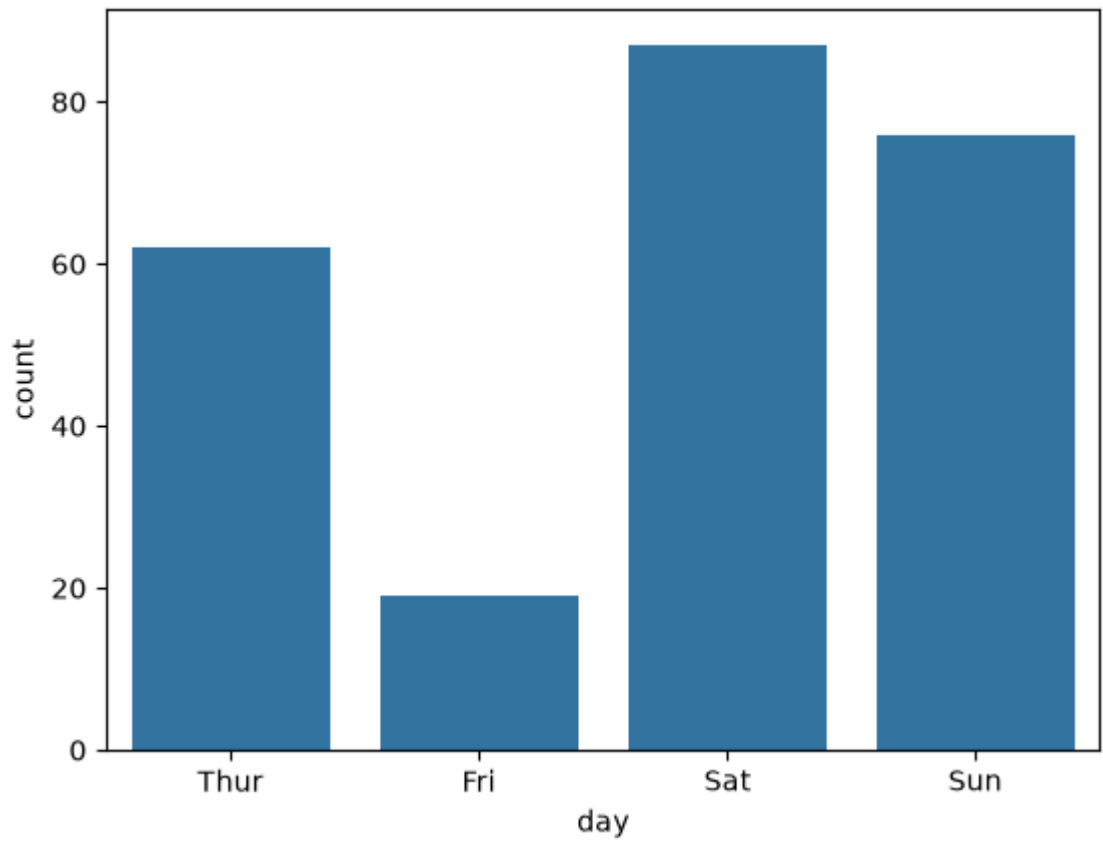

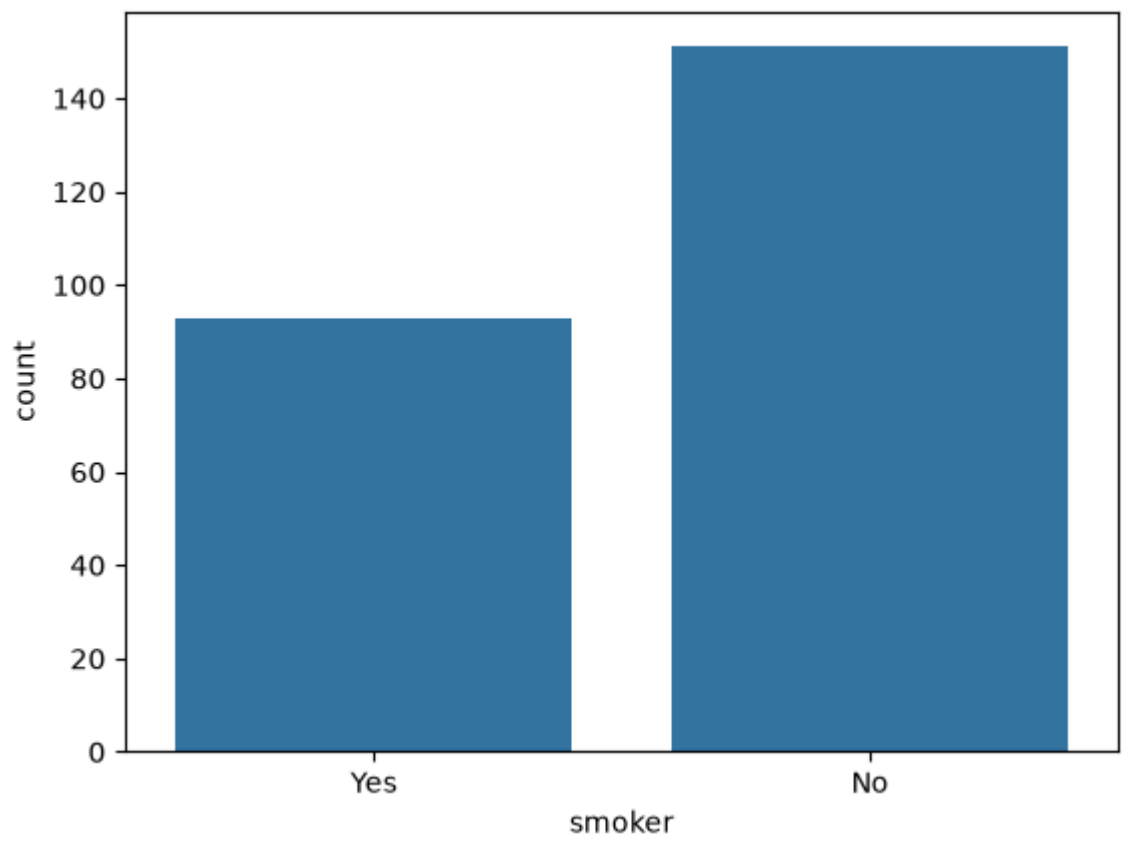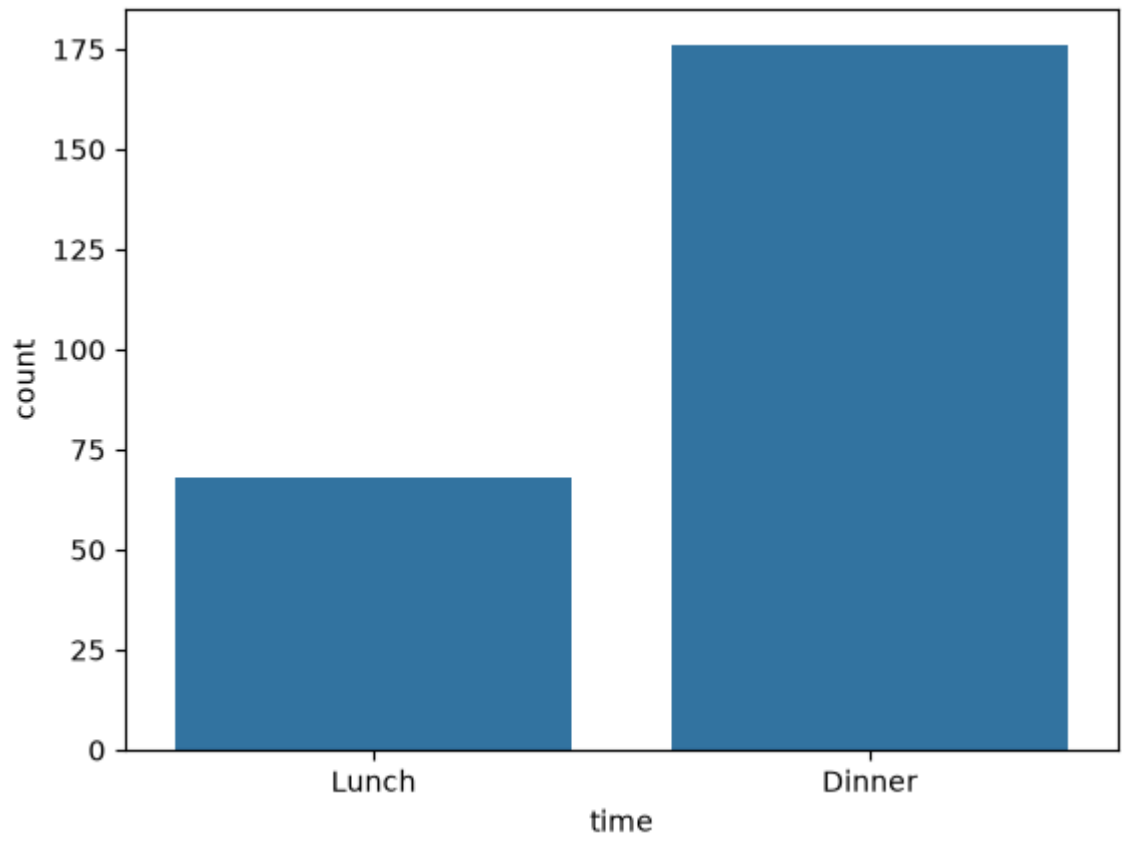

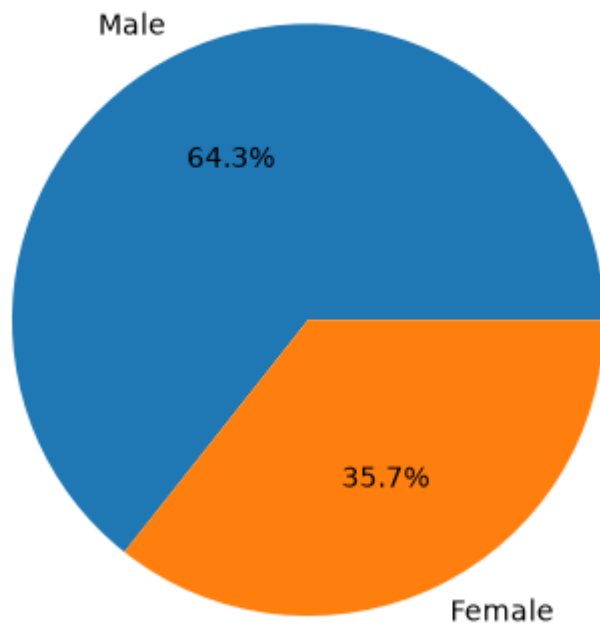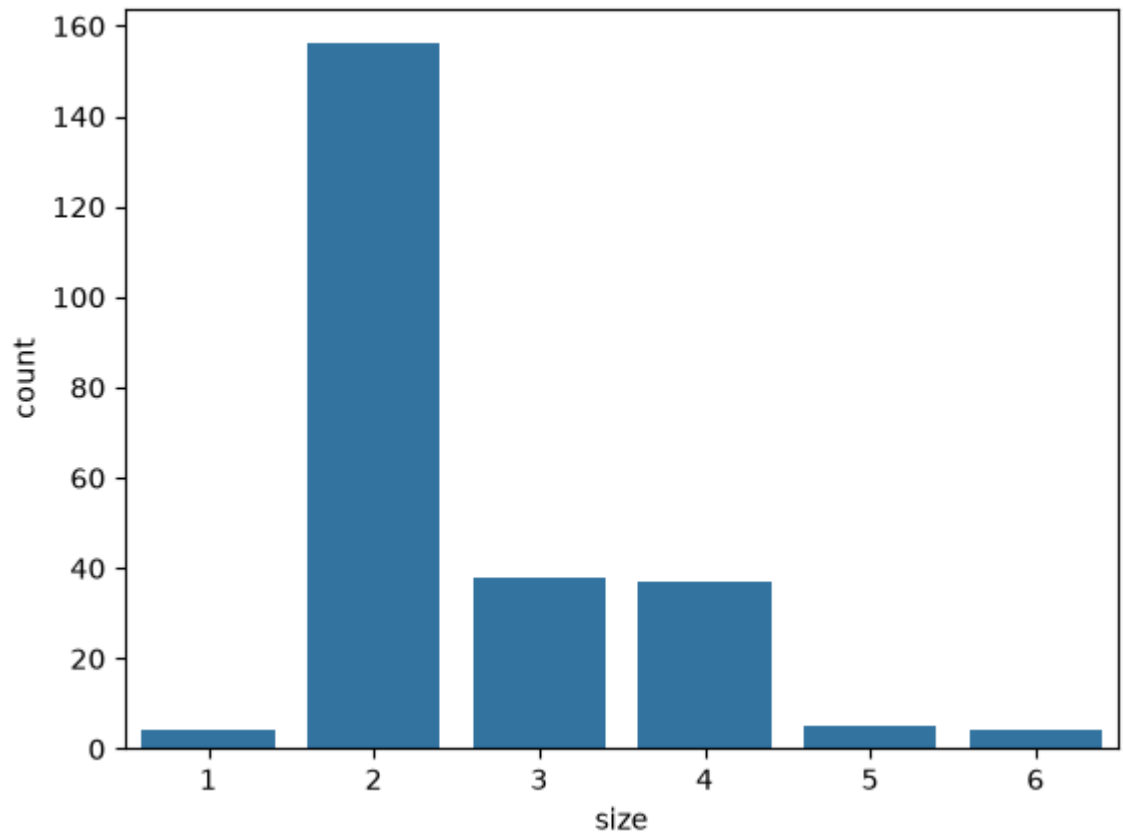

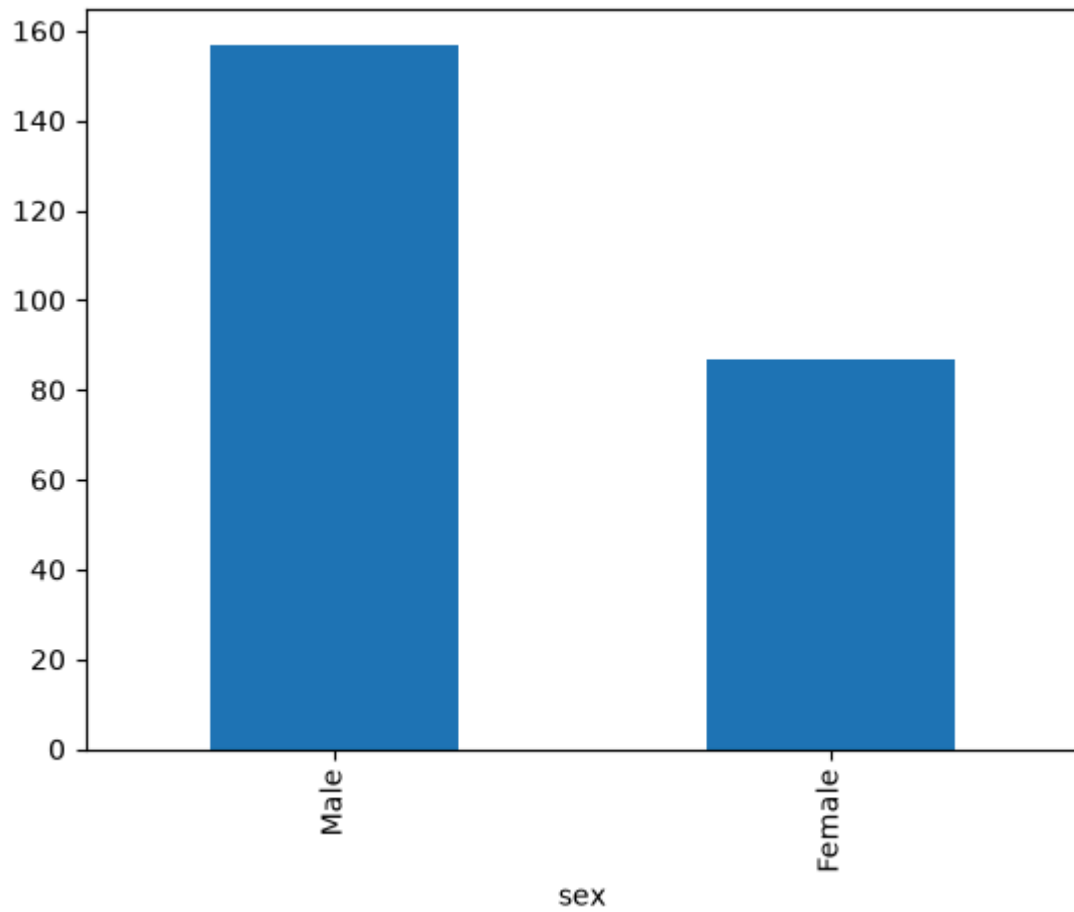

```
time
Dinner    176
Lunch      68
Name: count, dtype: int64
```

In []: