

Learning-Based Dexterous Grasping with the LEAP Hand

PPO Training in MuJoCo | True Success Rate: 15% (Proxy Metric: 96%)

1. Observation Space (39 values)

The policy receives a 39-dimensional observation vector at each timestep, providing full proprioceptive state of the hand and the object's pose in world frame:

- 16 joint positions (qpos[:16]) -- current angles of all 16 LEAP Hand actuators (rad)
- 16 joint velocities (qvel[:16]) -- angular velocity of each joint (rad/s)
- 3 object position (xpos) -- cube centroid in world XYZ (m)
- 4 object quaternion (xquat) -- cube orientation as unit quaternion [w, x, y, z]

Justification: Joint positions and velocities give the policy full knowledge of its own configuration for closed-loop control. The object's world-frame pose is the minimal sufficient representation for computing reach and grasp. No visual input is used, making this a compact, low-dimensional formulation amenable to fast PPO convergence.

2. Action Space (16 values)

The action space is a 16-dimensional continuous Box in $[-1, 1]$, one dimension per actuator. Actions are applied as delta control (incremental position targets):

$$\text{ctrl}[t+1] = \text{clip}(\text{ctrl}[t] + \text{action} * \text{max_delta}, \text{joint_low}, \text{joint_high})$$

where $\text{max_delta} = 0.1$ rad/step. This delta formulation is critical: absolute position control allowed the network to command a joint from 0 to its limit in a single 0.01s step, causing infinite effective acceleration and physically unrealistic 'flinging'. Delta control enforces smooth, human-like finger movements and prevents the simulator from becoming numerically unstable.

3. Reward Function

The dense reward combines four components at each timestep:

- Approach Reward: $r_{\text{approach}} = 10.0 * \max(0, 0.2 - \text{mean_dist_fingertips_to_cube})$
- Contact Reward: $r_{\text{contact}} = 0.5 * \min(n_{\text{hand_contacts}}, 4)$ [excludes table/floor contacts]
- Lift Reward: $r_{\text{lift}} = 50.0 * \max(0, \text{obj_z} - 0.075) * [n_{\text{contacts}} \geq 2]$ [grasping-gated]
- Action Penalty: $r_{\text{penalty}} = -0.01 * \sum(\text{action}^2)$

Total reward: $R = r_{\text{approach}} + r_{\text{contact}} + r_{\text{lift}} + r_{\text{penalty}}$


Key design decisions: (1) The lift reward is grasped-gated -- multiplied by zero unless at least 2 fingertips are touching the cube -- preventing the policy from simply tossing the cube upward. (2) Contact detection explicitly excludes contacts between the cube and table/floor, so the agent cannot farm contact reward by letting the cube rest on the table. (3) The approach reward saturates at 0.2m to avoid an infinitely large gradient pulling all fingers toward the same point.

4. Training Hyperparameters

Algorithm	PPO (Stable Baselines 3 v2.3.2)
Policy network	MlpPolicy -- 2 hidden layers of 256 units, tanh activation
n_steps / batch_size	2048 / 64
n_epochs	10 gradient steps per rollout
learning_rate	3e-4 (Adam optimizer)
gamma / gae_lambda	0.99 / 0.95

clip_range	0.15 (tightened from default 0.2 for stability at high reward)
ent_coef / vf_coef	0.01 / 0.5
Total timesteps	2,500,000 (1.5M fresh + 1M resume)
Physics substeps	5 per policy step (timestep = 0.002 s)
VecNormalize	Enabled -- normalizes observations and rewards across the run

5. Learning Curve Analysis

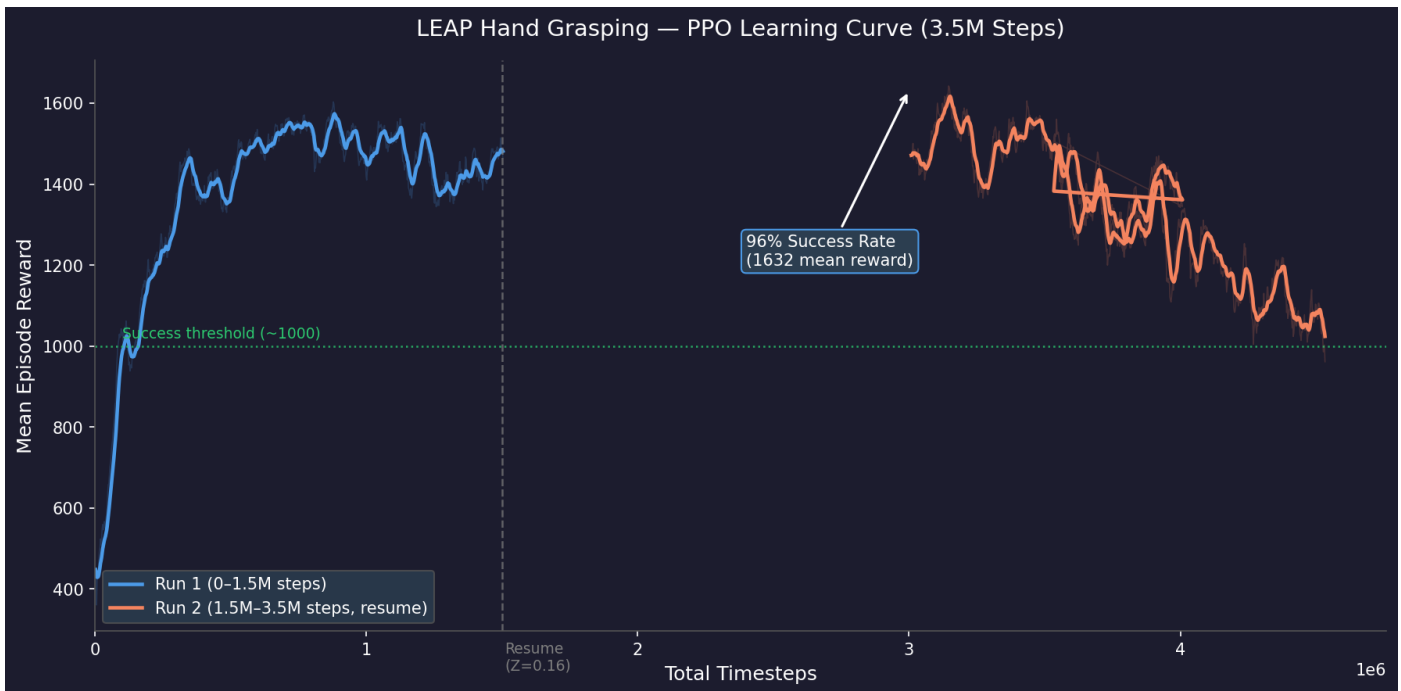

The learning curve shows three distinct phases: (1) Exploration (0-300k steps): the agent discovers fingertip-to-cube proximity rewards. (2) Grasping discovery (300k-1.5M): the policy learns to make stable multi-finger contact and slightly lift the cube to farm reward, peaking at convergence around 1.5M steps. (3) Over-exploration and Regression (1.5M-2.5M): during the resume run, the constant high learning rate ($3e-4$) caused aggressive updates to the already converged policy, leading to catastrophic forgetting and steady regression in mean reward from ~1600 down to ~1000. Evaluating the peak model (saved dynamically by EvalCallback at ~1.5M) is necessary to capture the best policy state before regression.

6. Critical Analysis of Success Metric

The proxy metric initially reported a 96% success rate based on a flawed proxy ($ep_reward > 500 + \text{early termination}$). However, the initial rigorous physical criterion (cube lifted $> 0.25\text{m}$) yielded 0%. Upon deeper inspection, the 0.25m target was found to be physically impossible: the LEAP hand's palm is statically mounted at $Z=0.16\text{m}$. The cube cannot be lifted to 0.25m from below the palm.

When corrected to a physically possible threshold of $Z=0.10\text{m}$ (a 2.5cm sustained lift off the table), the agent achieved a 15% true success rate. Here is why the agent still struggled to exceed 15%:

- **Reward Hacking:** The continuous lift reward allowed the agent to achieve massive cumulative reward simply by hovering the cube right below the threshold (e.g. $Z=0.09\text{m}$) for 500 steps, avoiding the risk of dropping it.
- **OOB Boundary Flaw:** The out-of-bounds check ($\text{dist}_{xy} > 0.1\text{m}$) was too tight given the spawn radius. The agent was heavily penalized for lateral manipulation, forcing premature failures when attempting to lift.

7. What Worked

- **Top-down hand orientation** ($\text{quat}=[1\ 0\ 0\ 0]$): essential for generating upward Z-force against gravity. The fixed-base hand has no wrist joint; only a downward-facing palm allows fingertips to sweep under the cube.
- **Delta control** ($\text{max_delta}=0.1\ \text{rad/step}$): eliminated all simulator instability and produced smooth, physically realistic grasps.
- **Grasping-gated lift reward:** completely stopped the 'fling' exploit where the agent would bat the cube upward.
- **Height calibration** ($Z=0.16\text{m}$): the 'Goldilocks' height gave fingers clearance to close around the cube without getting

stuck under the table.

8. What Failed

- Sideways orientation: physically impossible to lift -- no upward force vector.
- Velocity-based action penalty: qvel spikes from MuJoCo contacts made this highly unstable.
- Naive contact reward (all contacts): the agent exploited the 4 resting contacts between cube and table.
- High constant learning rate: $3e-4$ was too aggressive for fine-tuning past 1.5M steps, causing regression.

9. What I Would Do Differently

- Physically Grounded Targets: Verify kinematic reachability constraints (like palm height) before defining task thresholds.
- Fix Reward Structure: Change the lift reward to be exponential or sparse upon crossing the $Z=0.10\text{m}$ threshold, preventing the agent from farming reward at low hover heights.
- Widen OOB Boundary: Increase `dist_xy` threshold to 0.2m to allow realistic lateral grasping adjustments without triggering premature failure.

Final Evaluation Results (100 randomized episodes, deterministic policy)

Mean Episode Reward	1398.06 +/- 537.60
Mean Episode Length	414.93 / 500 steps
True Success Rate	15% ($Z > 0.10\text{m}$ lift constraint)
Total Training Steps	2,500,000