

**Documentation Settings** 

# Amazon.com 273

# **Address**

### **POST** Add Address

http://localhost:3000/write/customer/profile/address/3

#### BODY raw

```
"name":"kowshhal",

"address1":"190 ryland street",

"address2":"Apt 5312",

"city":"san Jose",

"state":"california",

"country":"United States",

"zipCode":"95110",

"phoneNumber":"6693007583"
}
```

### **Example Request**

Add Address

```
curl --location --request POST 'http://localhost:3000/write/customer/profite/dddfrestif/3 fectings
--data-raw '{
    "name":"kowshhal",
    "address1":"190 ryland street",
    "address2":"Apt 5312",
    "city":"san Jose",
    "state":"california",
    "country":"United States",
    "zipCode":"95110",
    "phoneNumber":"6693007583"
View More
```

### **DEL** delete address

```
http://localhost:3000/write/customer/profile/address/1
```

#### **Example Request**

```
delete address

curl --location --request DELETE 'http://localhost:3000/write/customer/profile/address/1'
```

### **PUT** update Address

http://localhost:3000/write/customer/profile/address/3

```
"name":"kowshhal",
    "address1":"190 ryland street",
    "address2":"Apt 5312",
    "city":"san Jose",
    "state":"california",
    "country":"United States of America",
    "zipCode":"95110",
    "phoneNumber":"6693007583"
}
```

**Documentation Settings** 

### **Example Request**

```
update Address

curl --location --request PUT 'http://localhost:3000/write/customer/profile/address/3' \
--data-raw '{
    "name":"kowshhal",
    "address1":"190 ryland street",
    "address2":"Apt 5312",
    "city":"san Jose",
    "state":"california",
    "country":"United States of America",
    "zipCode":"95110",
    "phoneNumber":"6693007583"
View More
```

# Signup

### **POST** signup

http://localhost:3000/write/signup

#### BODY raw

```
"name":"kowshhal",
    "email":"kowshhhal@gmail.com",
    "password":"qwerty",
    "userType":"customer"
}
```

### **Example Request**

signup

```
curl --location --request POST 'http://localhost:3000/write/signup' \
    --data-raw '{
        "name":"kowshhal",
        "email":"kowshhhal@gmail.com",
        "password":"qwerty",
        "userType":"customer"
}'
```

### POST SignUp

http://localhost:3000/write/signup

**HEADERS** 

### **Content-Type**

application/json

BODY raw

```
"name": "Apple",
   "email": "appple@appple.com",
   "password": "qwerty",
   "userType": "seller"
}
```

**Example Request** 

```
curl --location --request POST 'http://localhost:3000/write/signup' \
    --header 'Content-Type: application/json' \
    --data-raw '{
        "name": "Apple",
        "email": "appple@appple.com",
        "password": "qwerty",
        "userType": "seller"
}'
```

 $\equiv$ 

**Documentation Settings** 

# Login

## **POST** login

```
http://localhost:3000/write/login
```

**BODY** raw

```
{
    "email":"kowshhhal@gmail.com",
    "password":"qwerty"
}
```

**Example Request** 

```
curl --location --request POST 'http://localhost:3000/write/login' \
    --data-raw '{
        "email":"kowshhhal@gmail.com",
        "password":"qwerty"
}'
```

# **POST** Login

http://localhost:3000/write/login

**HEADERS** 

### **Content-Type**

application/json

### **Example Request**

```
curl --location --request POST 'http://localhost:3000/write/login' \
   --header 'Content-Type: application/json' \
   --data-raw '{
      "email": "appple@appple.com",
      "password": "qwerty"
}'
```

# Card

### **PUT** Update Card

http://localhost:3000/write/customer/profile/address/1

```
"name":"kowshhal",
    "address1":"190 ryland street",
    "address2":"Apt 5312",
    "city":"san Jose",
    "state":"california",
    "country":"United States of America",
    "zipCode":"95110",
    "phoneNumber":"6693007583"
}
```

= Example Request **Documentation Settings** 

### **DEL** Delete Card

http://localhost:3000/write/customer/profile/address/1

### **Example Request**

Delete Card

curl --location --request DELETE 'http://localhost:3000/write/customer/profile/address/1'

### **POST** Add Card

http://localhost:3000/write/customer/profile/address/3

```
Tocumentation Settings

"name":"kowshhal",

"address1":"190 ryland street",

"address2":"Apt 5312",

"city":"san Jose",

"state":"california",

"country":"United States of America",

"zipCode":"95110",

"phoneNumber":"6693007583"
}
```

### **Example Request**

# **Customer Profile**

### **GET** get profile

http://localhost:3000/read/customer/profile/1

#### **Example Request**

```
get profile
```

curl --location --request GET 'http://localhost:3000/read/customer/profile/1'

 $\equiv$ 

**Documentation Settings** 

# comments

### **POST** add comments

http://localhost:3000/write/comments/3/3

**BODY** raw

```
{
    "comment":"its a good item"
}
```

### **Example Request**

```
add comments

curl --location --request POST 'http://localhost:3000/write/comments/3/3' \
   --data-raw '{
        "comment":"its a good item"
}'
```

### **PUT** update comments

http://localhost:3000/write/comments/2

```
{
    "comment":"its an Awesome item"
}
```

```
pocumentation Settings

update comments

curl --location --request PUT 'http://localhost:3000/write/comments/2' \
    --data-raw '{
        "comment":"its an Awesome item"
}'
```

### **DEL** delete comments

```
http://localhost:3000/write/comments/1
```

### **Example Request**

delete comments

```
curl --location --request DELETE 'http://localhost:3000/write/comments/1'
```

# cart

### **POST** create product in cart

```
http://localhost:3000/write/customer/cart/1/1
```

```
{
    "quantity":"3"
}
```

Example Request

create product in cart

curl --location --request POST 'http://localhost:3000/write/customer/cart/1/1' \
--data-raw '{
 "quantity":"3"
}'

## PUT update a product in cart

```
http://localhost:3000/write/customer/cart/1
```

#### BODY raw

```
{
    "quantity":"2"
}
```

### **Example Request**

```
update a product in cart

curl --location --request PUT 'http://localhost:3000/write/customer/cart/1' \
    --data-raw '{
        "quantity":"2"
}'
```

# **DEL** delete a product in cart

```
http://localhost:3000/write/customer/cart/1
```

### **Example Request**

delete a product in cart

= curl --location --request DELETE 'http://localhost:3000/write/customer/car@fumentation Settings

## **GET** get a cart by customer Id

http://localhost:3000/read/customer/cart/1

### **Example Request**

get a cart by customer Id

curl --location --request GET 'http://localhost:3000/read/customer/cart/1'

# Votes

## **POST** Add ratings

http://localhost:3000/write/customer/profile/votes/3/3

BODY raw

```
{
    "rating":"3"
}
```

### **Example Request**

Add ratings

```
= curl --location --request POST 'http://localhost:3000/write/customer/profite/voces/5/3 bettings --data-raw '{
    "rating":"3"
}'
```

## **PUT** Update rating

```
http://localhost:3000/write/customer/profile/votes/1
```

BODY raw

```
{
    "rating":"3"
}
```

### **Example Request**

```
Update rating

curl --location --request PUT 'http://localhost:3000/write/customer/profile/votes/1' \
   --data-raw '{
        "rating":"3"
}'
```

# product

### **POST** Create Products

```
http://localhost:3000/write/products
```

**HEADERS** 

### **Content-Type**

\_application/json

**Documentation Settings** 

BODY raw

```
"productName": "Iphone X",
    "sellerName": "Apple",
    "price": "1000",
    "description": "Iphone SE 2020",
    "sellerId": "3",
    "categoryId": "1"
}
```

### **Example Request**

```
Create Products

curl --location --request POST 'http://localhost:3000/write/products' \
    --header 'Content-Type: application/json' \
    --data-raw '{
        "productName": "Iphone X",
        "sellerName": "Apple",
        "price": "1000",
        "description": "Iphone SE 2020",
        "sellerId": "3",
        "categoryId": "1"
}'
```


### **GET** get product by id

```
http://localhost:3000/read/products/3
```

### **Example Request**

```
get product by id
```

```
curl --location --request GET 'http://localhost:3000/read/products/3'
```

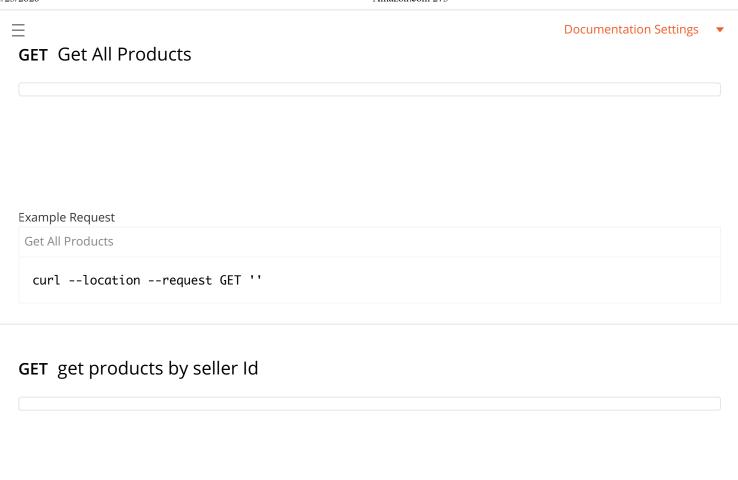

### **Example Request**

get products by seller Id

curl --location --request GET ''

# seller

# **GET** Get all Seller profile

http://localhost:3000/read/seller/profile/

```
= Get all Seller profile Documentation Settings 

curl --location --request GET 'http://localhost:3000/read/seller/profile/'
```

# Category

## **GET** Get category

http://localhost:3000/read/admin/category/1

### **Example Request**

Get category

curl --location --request GET 'http://localhost:3000/read/admin/category/1'

## **POST** Create Category

http://localhost:3000/write/admin/category

**HEADERS** 

### **Content-Type**

application/json

```
{
    "categoryName": "electronics"
}
```

```
curl --location --request POST 'http://localhost:3000/write/admin/category' \
    --header 'Content-Type: application/json' \
    --data-raw '{
        "categoryName": "electronics"
}'
```

### **PUT** Update Category

### **Example Request**

```
Update Category
```

```
curl --location --request PUT ''
```

# **Orders**

# **PUT** Update order by Seller

http://localhost:3000/write/seller/orders/5e9ff7648d3e7f1e96d4ce3b

**HEADERS** 

### **Content-Type**

application/json

```
Documentation Settings

"productId": "1",
    "orderStatus": "open",
    "orderUpdateItem": {
        "deliveryStatus": "shipped"
    }
}
```

### **Example Request**

```
Update order by Seller

curl --location --request PUT 'http://localhost:3000/write/seller/orders/5e9ff7648d3e7f1e96d4ce:
--header 'Content-Type: application/json' \
--data-raw '{
    "productId": "1",
    "orderStatus": "open",
    "orderUpdateItem": {
        "deliveryStatus": "shipped"
    }
}'
```

## **GET** Get All orders by Admin

http://localhost:3000/read/admin/orders

### **Example Request**

Get All orders by Admin

curl --location --request GET 'http://localhost:3000/read/admin/orders'

# **GET** Get Order by Id

http://localhost:3000/read/customer/orders/5e9f7d13e4b8f4725ac10f66



**Documentation Settings** 

**Example Request** 

```
Get Order by Id
```

```
curl --location --request GET 'http://localhost:3000/read/customer/orders/5e9f7d13e4b8f4725ac10f
```

### **POST** Create Orders

```
http://localhost:3000/write/customer/orders/1
```

**HEADERS** 

### **Content-Type**

application/json

BODY raw

### **Example Request**

Create Orders

# **GET** Get Order by customer Id

```
http://localhost:3000/read/customer/orders/1
```

#### **Example Request**

```
Get Order by customer Id

curl --location --request GET 'http://localhost:3000/read/customer/orders/1'
```

# **Stats**

### **GET** Top 5 Sellers

http://localhost:3000/read/admin/stats/top/seller

### **Example Request**

```
Top 5 Sellers
```

curl --location --request GET 'http://localhost:3000/read/admin/stats/top/seller'



**Documentation Settings** 

# **GET** Top 5 Customers

http://localhost:3000/read/admin/stats/top/customer

### **Example Request**

Top 5 Customers

curl --location --request GET 'http://localhost:3000/read/admin/stats/top/customer'