

Slack กดที่ลิงด้านล่าง

ตรง channel name ใ้กรอก channe ที่อยากให้งี้เตือน

Set Up Notification

Notification Type

Slack

Friendly Name

My Slack Alert (1)

Webhook URL *

Username

Changes the display name of the message sender. If you want to mention someone, include it in the friendly name instead.

Icon Emoji

Channel Name

Message format

☒ Send rich messages


*Required

More info about Webhooks on:

<https://api.slack.com/messaging/webhooks>

Enter the channel name on slack Channel Name field if you want to bypass the Webhook channel. Ex: #other-channel

เพื่อมาหน้า slackapi

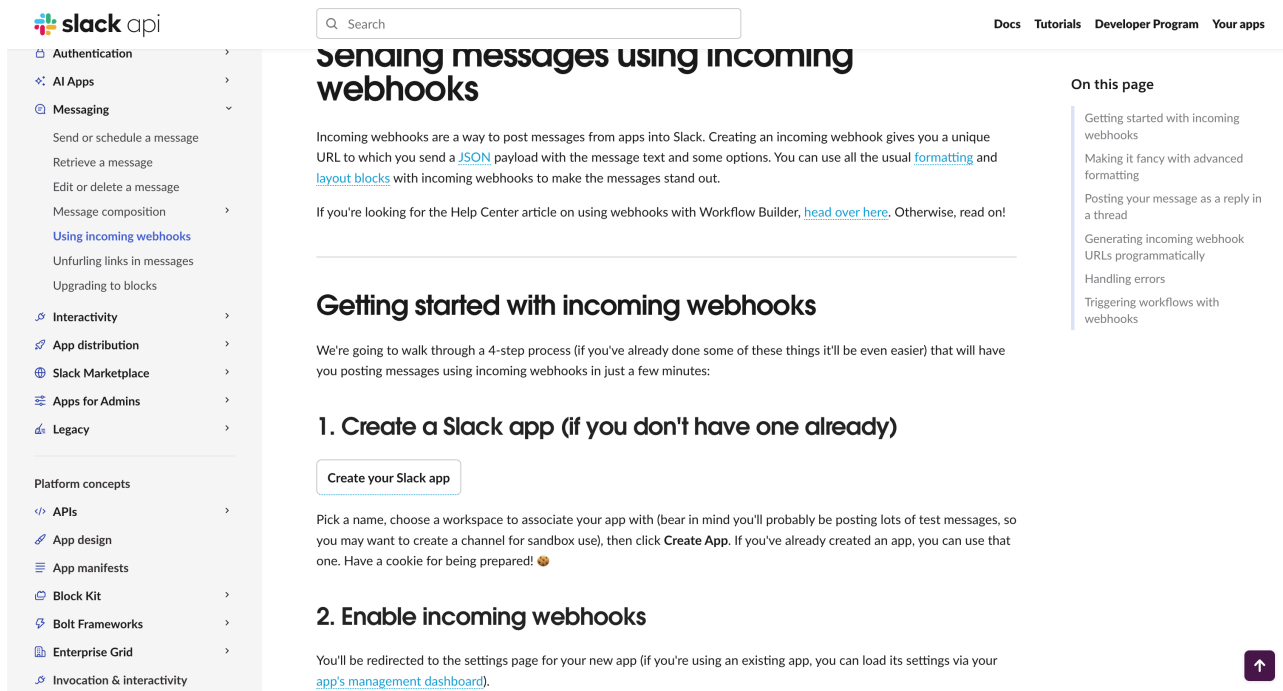

The screenshot shows the Slack API documentation page. The left sidebar contains a navigation menu with categories like Authentication, AI Apps, Messaging, Interactivity, App distribution, Slack Marketplace, Apps for Admins, Legacy, Platform concepts, APIs, App design, App manifests, Block Kit, Bolt Frameworks, Enterprise Grid, and Invocation & interactivity. The main content area is titled 'Sending messages using incoming webhooks' and includes a search bar, a 'Docs' link, and a 'Tutorials' link. The page content explains that incoming webhooks are a way to post messages from apps into Slack and provides a 4-step process for getting started. The first step is 'Create a Slack app (if you don't have one already)' and the second is 'Enable incoming webhooks'. A 'Create your Slack app' button is visible. The right sidebar lists 'On this page' links: Getting started with incoming webhooks, Making it fancy with advanced formatting, Posting your message as a reply in a thread, Generating incoming webhook URLs programmatically, Handling errors, and Triggering workflows with webhooks. A purple arrow icon is in the bottom right corner.

slack api

Search

Docs Tutorials Developer Program Your apps

Sending messages using incoming webhooks

Incoming webhooks are a way to post messages from apps into Slack. Creating an incoming webhook gives you a unique URL to which you send a [JSON](#) payload with the message text and some options. You can use all the usual [formatting](#) and [layout blocks](#) with incoming webhooks to make the messages stand out.

If you're looking for the Help Center article on using webhooks with Workflow Builder, [head over here](#). Otherwise, read on!

Getting started with incoming webhooks

We're going to walk through a 4-step process (if you've already done some of these things it'll be even easier) that will have you posting messages using incoming webhooks in just a few minutes:

1. Create a Slack app (if you don't have one already)

Create your Slack app

Pick a name, choose a workspace to associate your app with (bear in mind you'll probably be posting lots of test messages, so you may want to create a channel for sandbox use), then click **Create App**. If you've already created an app, you can use that one. Have a cookie for being prepared! 🍪


2. Enable incoming webhooks

You'll be redirected to the settings page for your new app (if you're using an existing app, you can load its settings via your [app's management dashboard](#)).

On this page

- Getting started with incoming webhooks
- Making it fancy with advanced formatting
- Posting your message as a reply in a thread
- Generating incoming webhook URLs programmatically
- Handling errors
- Triggering workflows with webhooks

มาที่ slack เพื่อสร้าง channel ของผม
สร้างไว้ชื่อ Notification

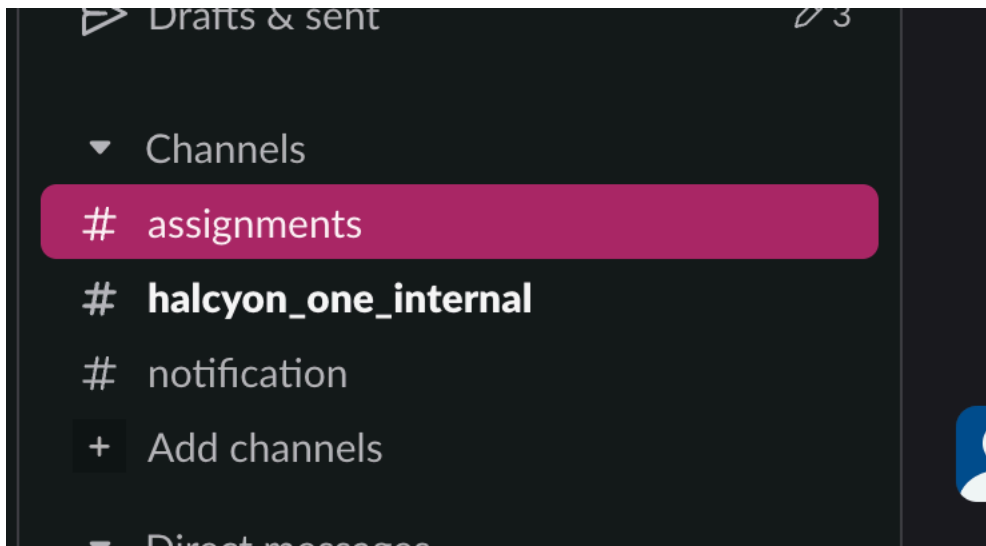

กด create ไปเลย

1. Create a Slack app (if you don't have one already)

Create your Slack app

Pick a name, choose a workspace to associate your app with (bear in mind you'll probably be posting lots of test messages, so you may want to create a channel for sandbox use), then click **Create App**. If you've already created an app, you can use that one. Have a cookie for being prepared! 🍪

คลิกอันล่าง

Create an app ×

Choose how you'd like to configure your app's scopes and settings.

From a manifest >

Use a manifest file to add your app's basic info, scopes, settings & features to your app.

From scratch >

Use our configuration UI to manually add basic info, scopes, settings, & features to your app.

Need help? Check our [documentation](#), or [see an example](#)

Name app & choose workspace



App Name

35

Don't worry - you'll be able to change this later.

Pick a workspace to develop your app in:



Keep in mind that you can't change this app's workspace later. If you leave the workspace, you won't be able to manage any apps you've built for it. The workspace will control the app even if you leave the workspace.


[Sign into a different workspace](#)

By creating a **Web API Application**, you agree to the [Slack API Terms of Service](#).

Cancel

Create App

ตั้งชื่อ Bot ที่อยากให้งานง่ายขึ้น

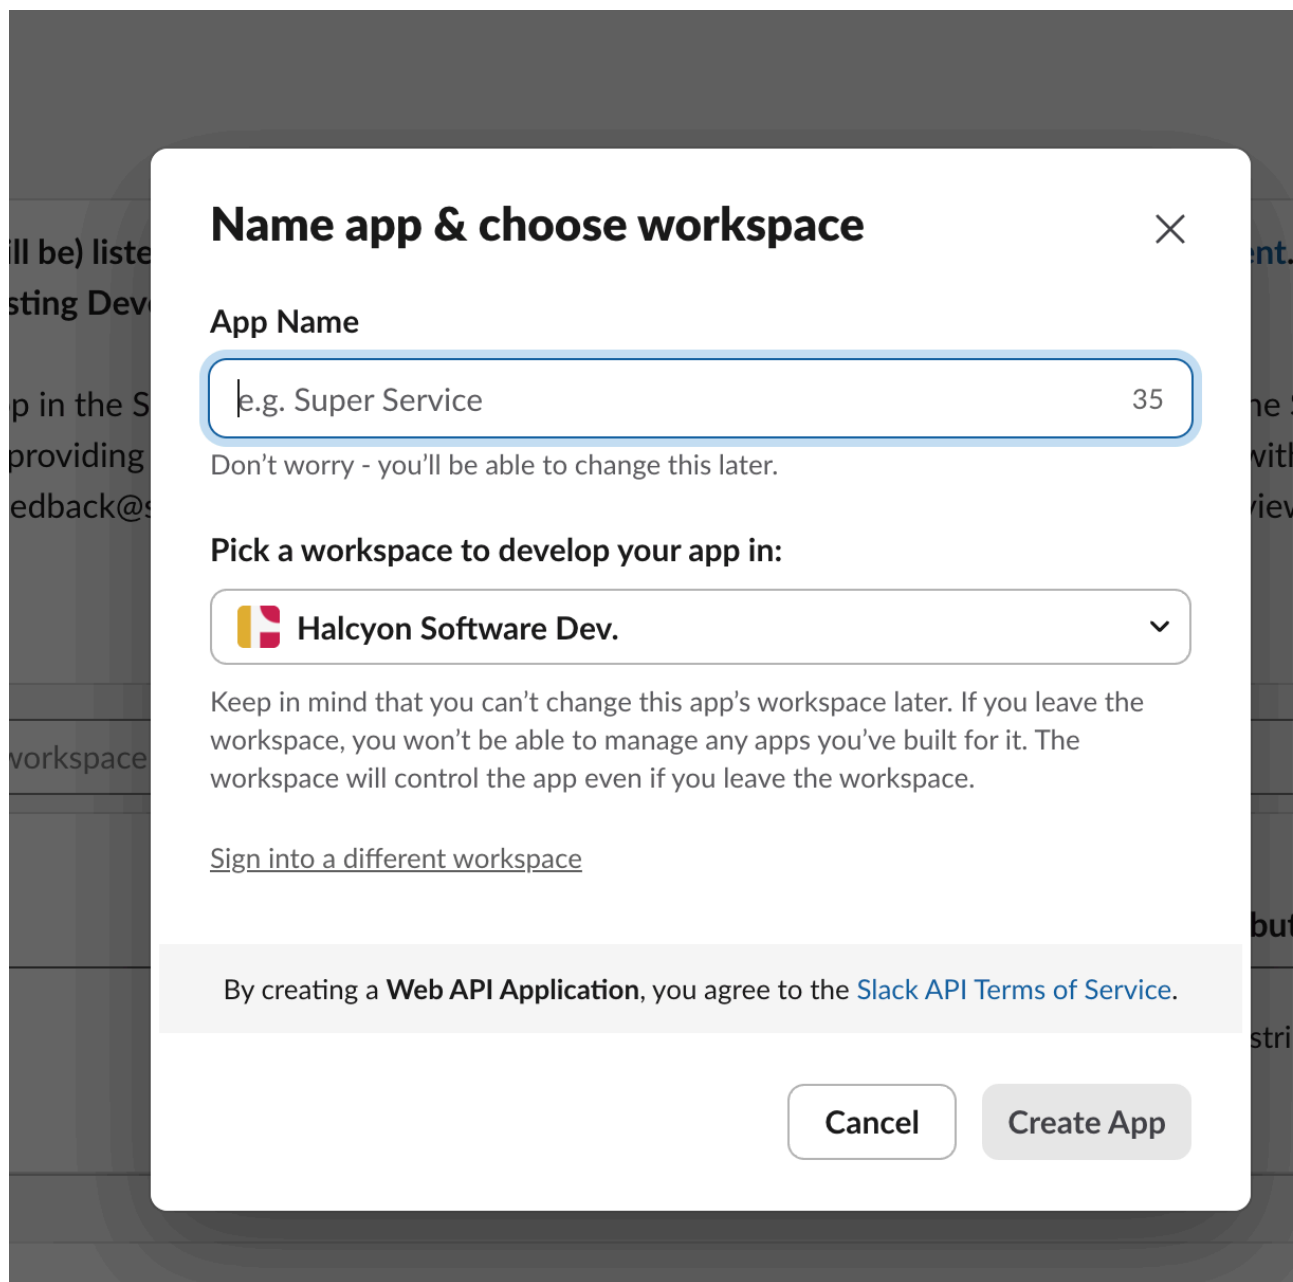

The image shows a screenshot of a Slack dialog box titled "Name app & choose workspace". The dialog has a close button (X) in the top right corner. It contains the following elements:

- App Name:** A text input field with the placeholder text "e.g. Super Service" and a character count "35". Below the field is a note: "Don't worry - you'll be able to change this later."
- Pick a workspace to develop your app in:** A dropdown menu showing "Halcyon Software Dev." with a downward arrow.
- Disclaimer:** A paragraph stating: "Keep in mind that you can't change this app's workspace later. If you leave the workspace, you won't be able to manage any apps you've built for it. The workspace will control the app even if you leave the workspace."
- Link:** A link labeled "Sign into a different workspace".
- Footer:** A line of text: "By creating a **Web API Application**, you agree to the [Slack API Terms of Service](#)."
- Buttons:** Two buttons at the bottom right: "Cancel" and "Create App".

Create เสร็จก็จะมาหน้านี้

slack api

Q Search

DocumentationTutorialsYour Apps

Test

Settings

Basic Information

Collaborators

Socket Mode

Install App

Manage Distribution

Features

App Home

Agents & AI Apps

Workflow Steps

Org Level Apps

Incoming Webhooks

Interactivity & Shortcuts

Slash Commands

Steps from Apps

OAuth & Permissions

Event Subscriptions

User ID Translation

App Manifest

Basic Information

App Credentials

These credentials allow your app to access the Slack API. They are secret. Please don't share your app credentials with anyone, include them in public code repositories, or store them in insecure ways.

App ID

A09994ZHPC3

Date of App Creation

August 7, 2025

Client ID

8684966204980.9315169601411

Client Secret

.....

Show

Regenerate

You'll need to send this secret along with your client ID when making your [oauth.v2.access](#) request.

Signing Secret

.....

Show

Regenerate

Slack signs the requests we send you using this secret. Confirm that each request comes from Slack by verifying its unique signature.

Verification Token

Discard Changes

Save Changes

ให้กด incoming webhooking เปิดเป็น ON

slack api

Q Search

DocumentationTutorialsYour Apps

Test

Settings

Basic Information

Collaborators

Socket Mode

Install App

Manage Distribution

Features

App Home

Agents & AI Apps

Workflow Steps

Org Level Apps

Incoming Webhooks

Interactivity & Shortcuts

Slash Commands

Steps from Apps

OAuth & Permissions

Event Subscriptions

User ID Translation

App Manifest

Beta Features

Submit to Slack

Incoming Webhooks

Activate Incoming Webhooks

Off

Incoming webhooks are a simple way to post messages from external sources into Slack. They make use of normal HTTP requests with a JSON payload, which includes the message and a few other optional details. You can include [message attachments](#) to display richly-formatted messages.

Adding incoming webhooks requires a bot user. If your app doesn't have a [bot user](#), we'll add one for you.

Each time your app is installed, a new Webhook URL will be generated.

ก็จะได้ web hook URL เพื่อนำไปใส่ใน Kuma

Webhook URL

Channel

Added By

https://hooks.slack.com/services/T08L4U Copy	#test	ChanasornK Aug 7, 2025
--	-------	--

Add New Webhook