
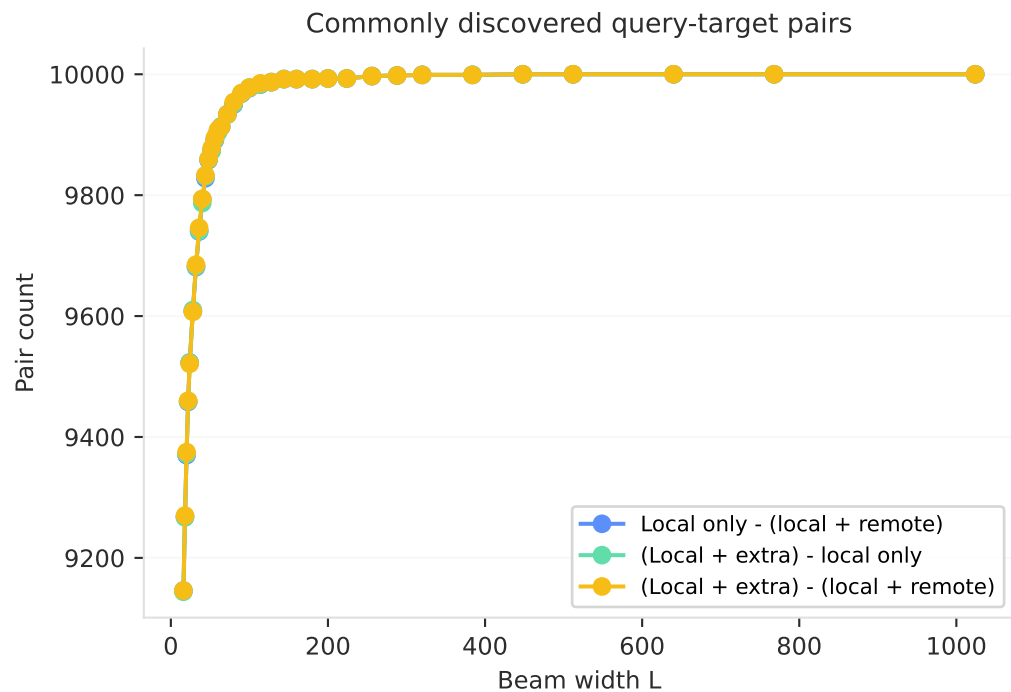


sift | N=1,000,000, k=10, 8 threads | diagnostic n=1000

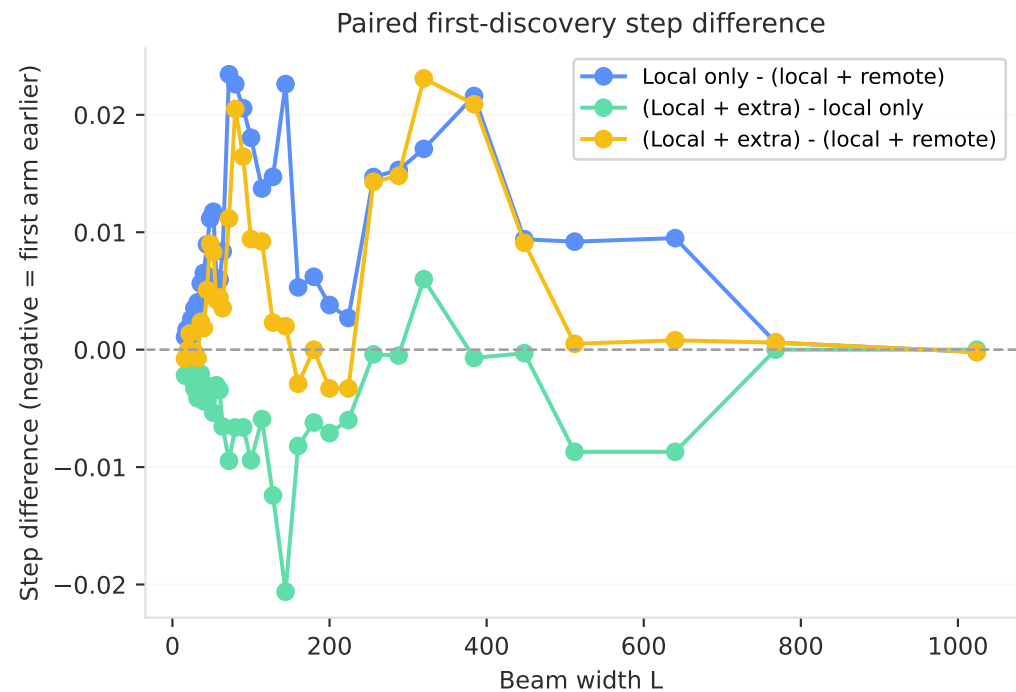

Each comparison uses its own common-target intersection. Missing comparisons are gaps, not zero.