Who connects to whom

Every .h file and every QML file, drawn from the real #include lines and the names each QML file uses. Each wrapper has its own colour.

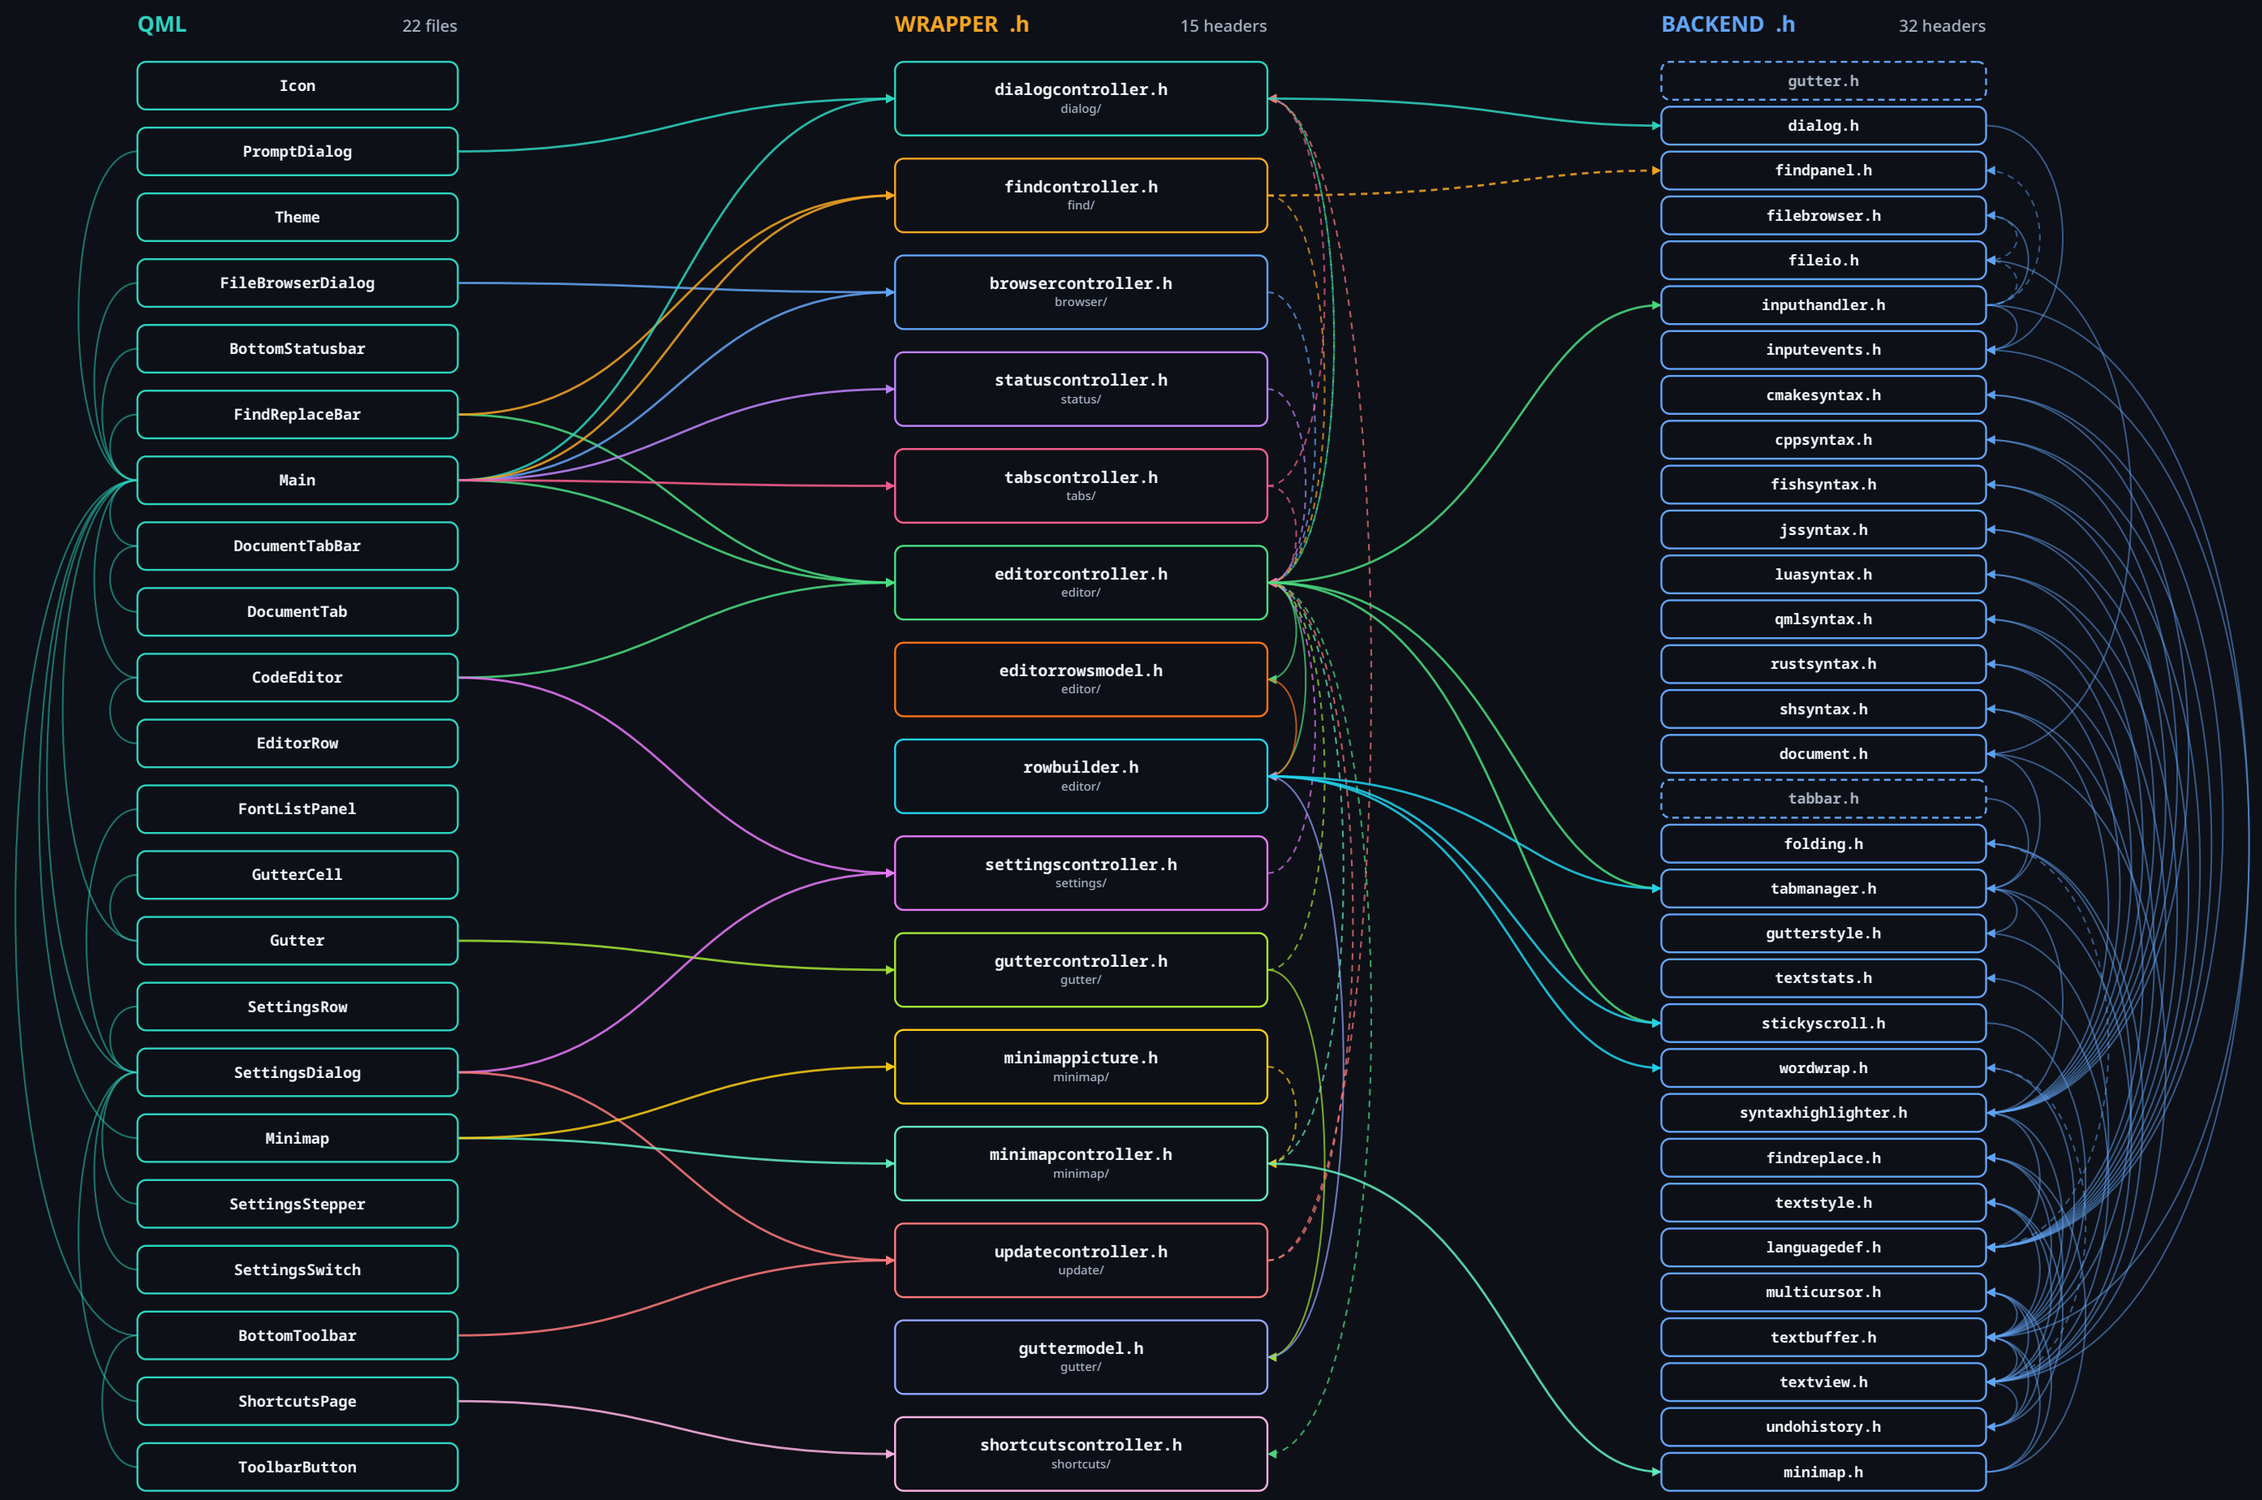

——— uses / includes - - - - - - only the .cpp includes it Dashed box: nothing includes it (gutter.h, tabbar.h). main.cpp, not drawn, includes editorcontroller.h and updatecontroller.h. editorrowsmodel.h and guttermodel.h reach QML through their controllers, so they have no QML line. Theme and Icon are used nearly everywhere, so their lines are left out.

Backend headers

Names are headers without .h. A * means only the .cpp includes it; the rest are in the .h itself.

File	Includes	Included by	Used by QML
`gutter.h`	-	-	-
`dialog.h`	inputevents	dialogcontroller	-
`findpanel.h`	-	findcontroller*, inputhandler*	-
`filebrowser.h`	fileio*	inputhandler	-
`fileio.h`	-	document, filebrowser*, inputhandler*	-
`inputhandler.h`	filebrowser, fileio*, findpanel*, inputevents, textview	editorcontroller	-
`inputevents.h`	textbuffer	dialog, inputhandler	-
`cmakesyntax.h`	languagedef	syntaxhighlighter	-
`cppsyntax.h`	languagedef	syntaxhighlighter	-
`fishsyntax.h`	languagedef	syntaxhighlighter	-
`jssyntax.h`	languagedef	syntaxhighlighter	-
`luasyntax.h`	languagedef	syntaxhighlighter	-
`qmlsyntax.h`	languagedef	syntaxhighlighter	-
`rustsyntax.h`	languagedef	syntaxhighlighter	-
`shsyntax.h`	languagedef	syntaxhighlighter	-
`document.h`	fileio, textview	tabmanager	-
`tabbar.h`	tabmanager	-	-
`folding.h`	languagedef*, textbuffer	textview	-
`tabmanager.h`	document, gutterstyle, syntaxhighlighter, textview	editorcontroller, rowbuilder, tabbar	-
`gutterstyle.h`	textbuffer	tabmanager	-
`textstats.h`	-	textview	-
`stickyscroll.h`	textbuffer	editorcontroller, rowbuilder	-
`wordwrap.h`	textbuffer	rowbuilder, textview*	-
`syntaxhighlighter.h`	cmakesyntax, cppsyntax, fishsyntax, jssyntax, languagedef, luasyntax, qmlsyntax, rustsyntax, shsyntax, textbuffer	tabmanager	-
`findreplace.h`	textbuffer	minimap, textview	-
`textstyle.h`	textbuffer	textview, undohistory	-
`languagedef.h`	-	cmakesyntax, cppsyntax, fishsyntax, folding*, jssyntax, luasyntax, qmlsyntax, rustsyntax, shsyntax, syntaxhighlighter	-
`multicursor.h`	textbuffer	minimap, textview, undohistory	-
`textbuffer.h`	-	findreplace, folding, gutterstyle, inputevents, minimap, multicursor, stickyscroll, syntaxhighlighter, textstyle, textview, undohistory, wordwrap	-
`textview.h`	findreplace, folding, multicursor, textbuffer, textstats, textstyle, undohistory, wordwrap*	document, inputhandler, tabmanager	-
`undohistory.h`	multicursor, textbuffer, textstyle	textview	-
`minimap.h`	findreplace, multicursor, textbuffer	minimapcontroller	-

Wrapper headers and QML

Same table for the wrapper, then what each QML file uses and places.

File	Includes	Included by	Used by QML
`dialogcontroller.h`	dialog, editorcontroller*	editorcontroller*, tabscontroller*, updatecontroller*	Main, PromptDialog
`findcontroller.h`	editorcontroller*, findpanel*	-	FindReplaceBar, Main
`browsercontroller.h`	editorcontroller*	-	FileBrowserDialog, Main
`statuscontroller.h`	editorcontroller*	-	Main
`tabscontroller.h`	dialogcontroller*, editorcontroller*	-	Main
`editorcontroller.h`	dialogcontroller*, editorrowsmodel, inputhandler, rowbuilder, shortcutscontroller*, stickyscroll, tabmanager	browsercontroller*, dialogcontroller*, findcontroller*, guttercontroller*, minimapcontroller*, settingscontroller*, statuscontroller*, tabscontroller*, updatecontroller*	CodeEditor, FindReplaceBar, Main
`editorrowsmodel.h`	rowbuilder	editorcontroller	-
`rowbuilder.h`	stickyscroll, tabmanager, wordwrap	editorcontroller, editorrowsmodel, guttermodel	-
`settingscontroller.h`	editorcontroller*	-	CodeEditor, SettingsDialog
`guttercontroller.h`	editorcontroller*, guttermodel	-	Gutter
`minimappicture.h`	minimapcontroller*	-	Minimap
`minimapcontroller.h`	editorcontroller*, minimap	minimappicture*	Minimap
`updatecontroller.h`	dialogcontroller*, editorcontroller*	-	BottomToolbar, SettingsDialog
`guttermodel.h`	rowbuilder	guttercontroller	-
`shortcutscontroller.h`	-	editorcontroller*	ShortcutsPage

QML files

File	Wrapper headers it uses	QML files it places
`BottomStatusbar.qml`	-	-
`BottomToolbar.qml`	updatecontroller	ToolbarButton
`CodeEditor.qml`	editorcontroller, settingscontroller	EditorRow
`DocumentTab.qml`	-	-
`DocumentTabBar.qml`	-	DocumentTab
`EditorRow.qml`	-	-
`FileBrowserDialog.qml`	browsercontroller	-
`FindReplaceBar.qml`	editorcontroller, findcontroller	-
`FontListPanel.qml`	-	-
`Gutter.qml`	guttercontroller	GutterCell
`GutterCell.qml`	-	-
`Icon.qml`	-	-
`Main.qml`	browsercontroller, dialogcontroller, editorcontroller, findcontroller, statuscontroller, tabscontroller	CodeEditor, FileBrowserDialog, FindReplaceBar, Gutter, Minimap, PromptDialog, SettingsDialog, BottomStatusbar, DocumentTabBar, BottomToolbar
`Minimap.qml`	minimapcontroller, minimappicture	-
`PromptDialog.qml`	dialogcontroller	-
`SettingsDialog.qml`	settingscontroller, updatecontroller	FontListPanel, SettingsRow, SettingsStepper, SettingsSwitch, ShortcutsPage
`SettingsRow.qml`	-	-
`SettingsStepper.qml`	-	-
`SettingsSwitch.qml`	-	-
`ShortcutsPage.qml`	shortcutscontroller	-
`Theme.qml`	-	-
`ToolbarButton.qml`	-	-