


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Successfully purchase item	13.120 s	1	0	1	0	7	1	1	5

FAIL & SKIP SCENARIOS -- 3 --


# 1	Feature Name	Scenario Name
1	Successfully purchase item	Add to cart and purchase item

FEATURES SUMMARY -- 4

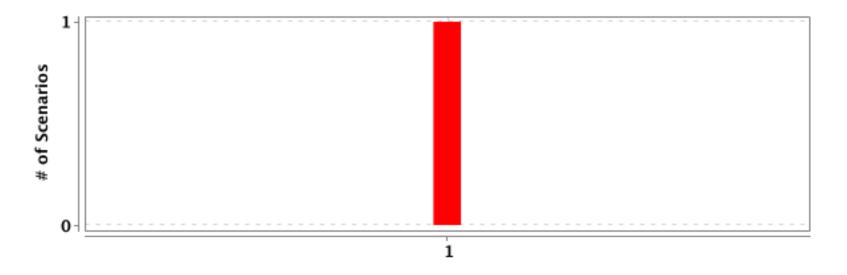

#	Feature Name	T	P	F	S	Duration
1	Successfully purchase item	1	0	1	0	13.120 s

SCENARIOS SUMMARY -- 5

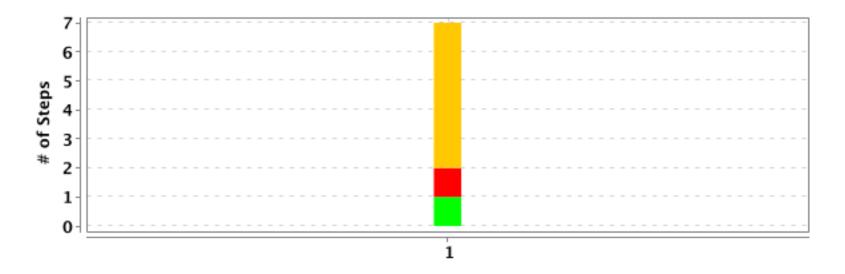


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Successfully purchase item	Add to cart and purchase item	7	1	1	5	13.116 s

DETAILED SECTION -- 6 --

Successfully purchase item

FAILED DURATION - 13.120 s	Scenarios		Steps	
	Total - 1		Total - 7	
/ 12:42:12.518 PM // 12:42:25.638 PM /	Pass - 0	1	Pass - 1	7
	Fail - 1		Fail - 1	
	Skip - 0		Skip - 5	

Add to cart and purchase item

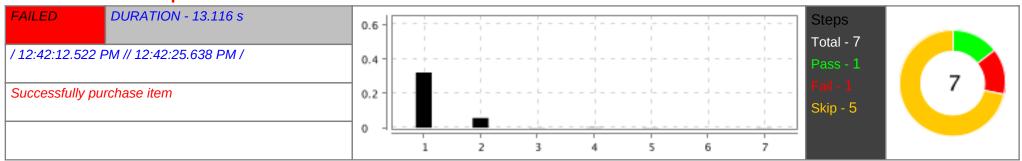

#	Step / Hook Details	Status	Duration
1	Given user is login	PASSED	0.321 s
	AFTER_STEP - hook.Hook.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.473 s
	Add to cart and purchase item		
	Practice Website for the Students Students Steely Additions Students		
2	And click add to cart	FAILED	0.056 s
	org.openqa.selenium.NoSuchElementException: Unable to locate element: //button[contains(text(),'Add To Cart')] For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.15.0', revision: '1d14b5521b' System info: os.name: 'Mac OS X', os.arch: 'x86_64', os.version: '15.6.1', java.version: '23.0.1' Driver info: org. openqa.selenium.firefox.FirefoxDriver Command: [57354acf-5f4c-406f-b9a3-27593c5ef924, findElement {using=xpath, value=//button[contains(text(),'Add To Cart')]}] Capabilities {acceptInsecureCerts: true, browserName: firefox, browserVersion: 142.0.1, moz:accessibilityChecks: false, moz:buildID: 20250827004350, moz:geckodriverVersion: 0.36.0, moz:headless: false, moz:platformVersion: 24.6.0, moz:processID: 65405, moz:profile: /var/folders/13/t53d0qcs67x, moz:shutdownTimeout: 60000, moz:webdriverClick: true,		

#	Step / Hook Details	Status	Duration
timeo} Se: at j at j at o	windowless: false, pageLoadStrategy: normal, platformName: mac, proxy: Proxy(), setWindowRect: true, strictFileInteractability: false, buts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, userAgent: Mozilla/5.0 (Macintosh; Int. ssion ID: 57354acf-5f4c-406f-b9a3-27593c5ef924 iava.base/jak.internal.reflect.DirectConstructorHandleAccessor.newInstance(DirectConstructorHandleAccessor.java:62) iava.base/java.lang.reflect.Constructor.newInstance(WithCaller(Constructor.java:501) iava.base/java.lang.reflect.Constructor.newInstance(Constructor.java:485) org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:200) org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:175) org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:607) org.openqa.selenium.remote.ElementLocation\$Element(Flement(Element(ElementLocation.java:165) org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:364) org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:358) StepDefinition.PurchaseSteps.click_add_to_cart(PurchaseSteps.java:33)		
I —	ER_STEP - hook.Hook.addScreenshot(io.cucumber.java.Scenario)	PASSED	0.179 s
ACCO TO	cart and purchase item		
3 Then	validate message	SKIPPED	0.001 s
4 And	click to cart	SKIPPED	0.002 s
5 And o	click check out	SKIPPED	0.001 s
6 And f	fill payment option	SKIPPED	0.000 s
7 And	click place order	SKIPPED	0.001 s