MySQL 26.7 Command Line C

```
Enter password: *******
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 13
Server version: 26.7.0 MySQL Community Server - GPL

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> show databases;
+--------------------+
| Database           |
+--------------------+
| information_schema |
| mysql              |
| performance_schema |
| sys                |
+--------------------+
4 rows in set (0.011 sec)

mysql> CREATE DATABASE College;
Query OK, 1 row affected (0.073 sec)

mysql> USE College;
Database changed
mysql> CREATE TABLE Student(Student_ID INT,Name VARCHAR(30),Age INT,Marks INT,City VARCHAR(20));
Query OK, 0 rows affected (0.148 sec)

mysql> INSERT INTO Student VALUES(1,'Chandu',20,90,'Bengaluru'),(2,'Dev',25,91,'Kerala'),(3,'Anish',22,87,'Mysuru');
Query OK, 3 rows affected (0.122 sec)
Records: 3  Duplicates: 0  Warnings: 0

mysql> SELECT * FROM Student;
+------------+--------+------+-------+-----------+
| Student_ID | Name   | Age  | Marks | City      |
+------------+--------+------+-------+-----------+
|          1 | Chandu |   20 |    90 | Bengaluru |
|          2 | Dev    |   25 |    91 | Kerala    |
```

27°C
Mostly sunny

Search

MySQL 26.7 Command Line C

```
mysql> SELECT * FROM Student;
+------------+--------+------+-------+-----------+
| Student_ID | Name   | Age  | Marks | City      |
+------------+--------+------+-------+-----------+
|          1 | Chandu |   20 |    90 | Bengaluru |
|          2 | Dev    |   25 |    91 | Kerala    |
|          3 | Anish  |   22 |    87 | Mysuru    |
+------------+--------+------+-------+-----------+
3 rows in set (0.004 sec)

mysql> SELECT Name, Marks =5 AS New_Marks
    -> FROM Student;
+--------+-----------+
| Name   | New_Marks |
+--------+-----------+
| Chandu |         0 |
| Dev    |         0 |
| Anish  |         0 |
+--------+-----------+
3 rows in set (0.008 sec)

mysql> SELECT Name, Marks + 5 AS New_Marks
    -> FROM Student;
+--------+-----------+
| Name   | New_Marks |
+--------+-----------+
| Chandu |        95 |
| Dev    |        96 |
| Anish  |        92 |
+--------+-----------+
3 rows in set (0.005 sec)

mysql> SELECT Name, Marks - 5 AS New_Marks
    -> FROM Student;
+--------+-----------+
| Name   | New_Marks |
+--------+-----------+
| Chandu |        85 |
| Dev    |        86 |
| Anish  |        82 |
+--------+-----------+
3 rows in set (0.006 sec)
```

27°C
Mostly sunny
Search

MySQL 26.7 Command Line C

```
mysql> SELECT Name, Marks - 5 AS Reduced_Marks
    -> FROM Student;
+---------+---------------+
| Name    | Reduced_Marks |
+---------+---------------+
| Chandu  |            85 |
| Dev     |            86 |
| Anish   |            82 |
+---------+---------------+
3 rows in set (0.005 sec)

mysql> SELECT Name, Marks * 2 AS Double_Marks
    -> FROM Student;
+---------+---------------+
| Name    | Double_Marks  |
+---------+---------------+
| Chandu  |           180 |
| Dev     |           182 |
| Anish   |           174 |
+---------+---------------+
3 rows in set (0.005 sec)

mysql> SELECT Name, Marks / 2 AS Half_Marks
    -> FROM Student;
+---------+-------------+
| Name    | Half_Marks  |
+---------+-------------+
| Chandu  |     45.0000 |
| Dev     |     45.5000 |
| Anish   |     43.5000 |
+---------+-------------+
3 rows in set (0.005 sec)

mysql> SELECT Name, Marks % 10 AS Remainder
    -> FROM Student;
+---------+-----------+
| Name    | Remainder |
+---------+-----------+
| Chandu  |         0 |
| Dev     |         1 |
| Anish   |         7 |
+---------+-----------+
```

27°C
Mostly sunny
Search

MySQL 26.7 Command Line C

```
3 rows in set (0.005 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks = 90;
+------------+--------+------+-------+-----------+
| Student_ID | Name   | Age  | Marks | City      |
+------------+--------+------+-------+-----------+
|          1 | Chandu |   20 |    90 | Bengaluru |
+------------+--------+------+-------+-----------+
1 row in set (0.007 sec)

mysql> SELECT * FROM Student
    -> WHERE City != Kerala;
ERROR 1054 (42S22): Unknown column 'Kerala' in 'where clause'
mysql> WHERE City != 'Kerala';
ERROR 1064 (42000): You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'WHERE City != 'Ker
la'' at line 1
mysql> SELECT * FROM Student
    -> WHERE City != 'Kerala';
+------------+--------+------+-------+-----------+
| Student_ID | Name   | Age  | Marks | City      |
+------------+--------+------+-------+-----------+
|          1 | Chandu |   20 |    90 | Bengaluru |
|          3 | Anish  |   22 |    87 | Mysuru    |
+------------+--------+------+-------+-----------+
2 rows in set (0.005 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks > 90;
+------------+------+------+-------+--------+
| Student_ID | Name | Age  | Marks | City   |
+------------+------+------+-------+--------+
|          2 | Dev  |   25 |    91 | Kerala |
+------------+------+------+-------+--------+
1 row in set (0.005 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks < 20;
Empty set (0.012 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks >= 90;
```

27°C
Mostly sunny
Search
ENG
IN
06:05
18-09-2026

MySQL 26.7 Command Line C

```
mysql> SELECT * FROM Student
    -> WHERE Marks >= 90;
+------------+---------+------+-------+-----------+
| Student_ID | Name    | Age  | Marks | City      |
+------------+---------+------+-------+-----------+
|          1 | Chandu  |   20 |    90 | Bengaluru |
|          2 | Dev     |   25 |    91 | Kerala    |
+------------+---------+------+-------+-----------+
2 rows in set (0.007 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks > 20 AND Age < 20;
Empty set (0.008 sec)

mysql> SELECT * FROM Student
    -> WHERE City = 'Bengaluru' OR City = 'Kerala';
+------------+---------+------+-------+-----------+
| Student_ID | Name    | Age  | Marks | City      |
+------------+---------+------+-------+-----------+
|          1 | Chandu  |   20 |    90 | Bengaluru |
|          2 | Dev     |   25 |    91 | Kerala    |
+------------+---------+------+-------+-----------+
2 rows in set (0.005 sec)

mysql> SELECT * FROM Student
    -> WHERE NOT City = 'Kerala';
+------------+---------+------+-------+-----------+
| Student_ID | Name    | Age  | Marks | City      |
+------------+---------+------+-------+-----------+
|          1 | Chandu  |   20 |    90 | Bengaluru |
|          3 | Anish   |   22 |    87 | Mysuru    |
+------------+---------+------+-------+-----------+
2 rows in set (0.005 sec)

mysql> SELECT 5 & 3 AS Bitwise_AND;
+-------------+
| Bitwise_AND |
+-------------+
|           1 |
+-------------+
1 row in set (0.021 sec)
```

27°C Mostly sunny
Search

MySQL 26.7 Command Line C

```
2 rows in set (0.005 sec)

mysql> SELECT 5 & 3 AS Bitwise_AND;
+-------------+
| Bitwise_AND |
+-------------+
|           1 |
+-------------+
1 row in set (0.021 sec)

mysql> SELECT 5 | 3 AS Bitwise_OR;
+------------+
| Bitwise_OR |
+------------+
|          7 |
+------------+
1 row in set (0.012 sec)

mysql> SELECT 5 ^ 3 AS Bitwise_XOR;
+-------------+
| Bitwise_XOR |
+-------------+
|           6 |
+-------------+
1 row in set (0.008 sec)

mysql> SELECT ~5 AS Bitwise_NOT;
+----------------------+
| Bitwise_NOT          |
+----------------------+
| 18446744073709551610 |
+----------------------+
1 row in set (0.013 sec)

mysql> SELECT 5 << 1 AS Left_Shift;
+------------+
| Left_Shift |
+------------+
|         10 |
+------------+
1 row in set (0.010 sec)
```

27°C Mostly sunny
Search

MySQL 26.7 Command Line C

```
| 18446744073709551610 |
+----------------------+
1 row in set (0.013 sec)

mysql> SELECT 5 << 1 AS Left_Shift;
+------------+
| Left_Shift |
+------------+
|         10 |
+------------+
1 row in set (0.010 sec)

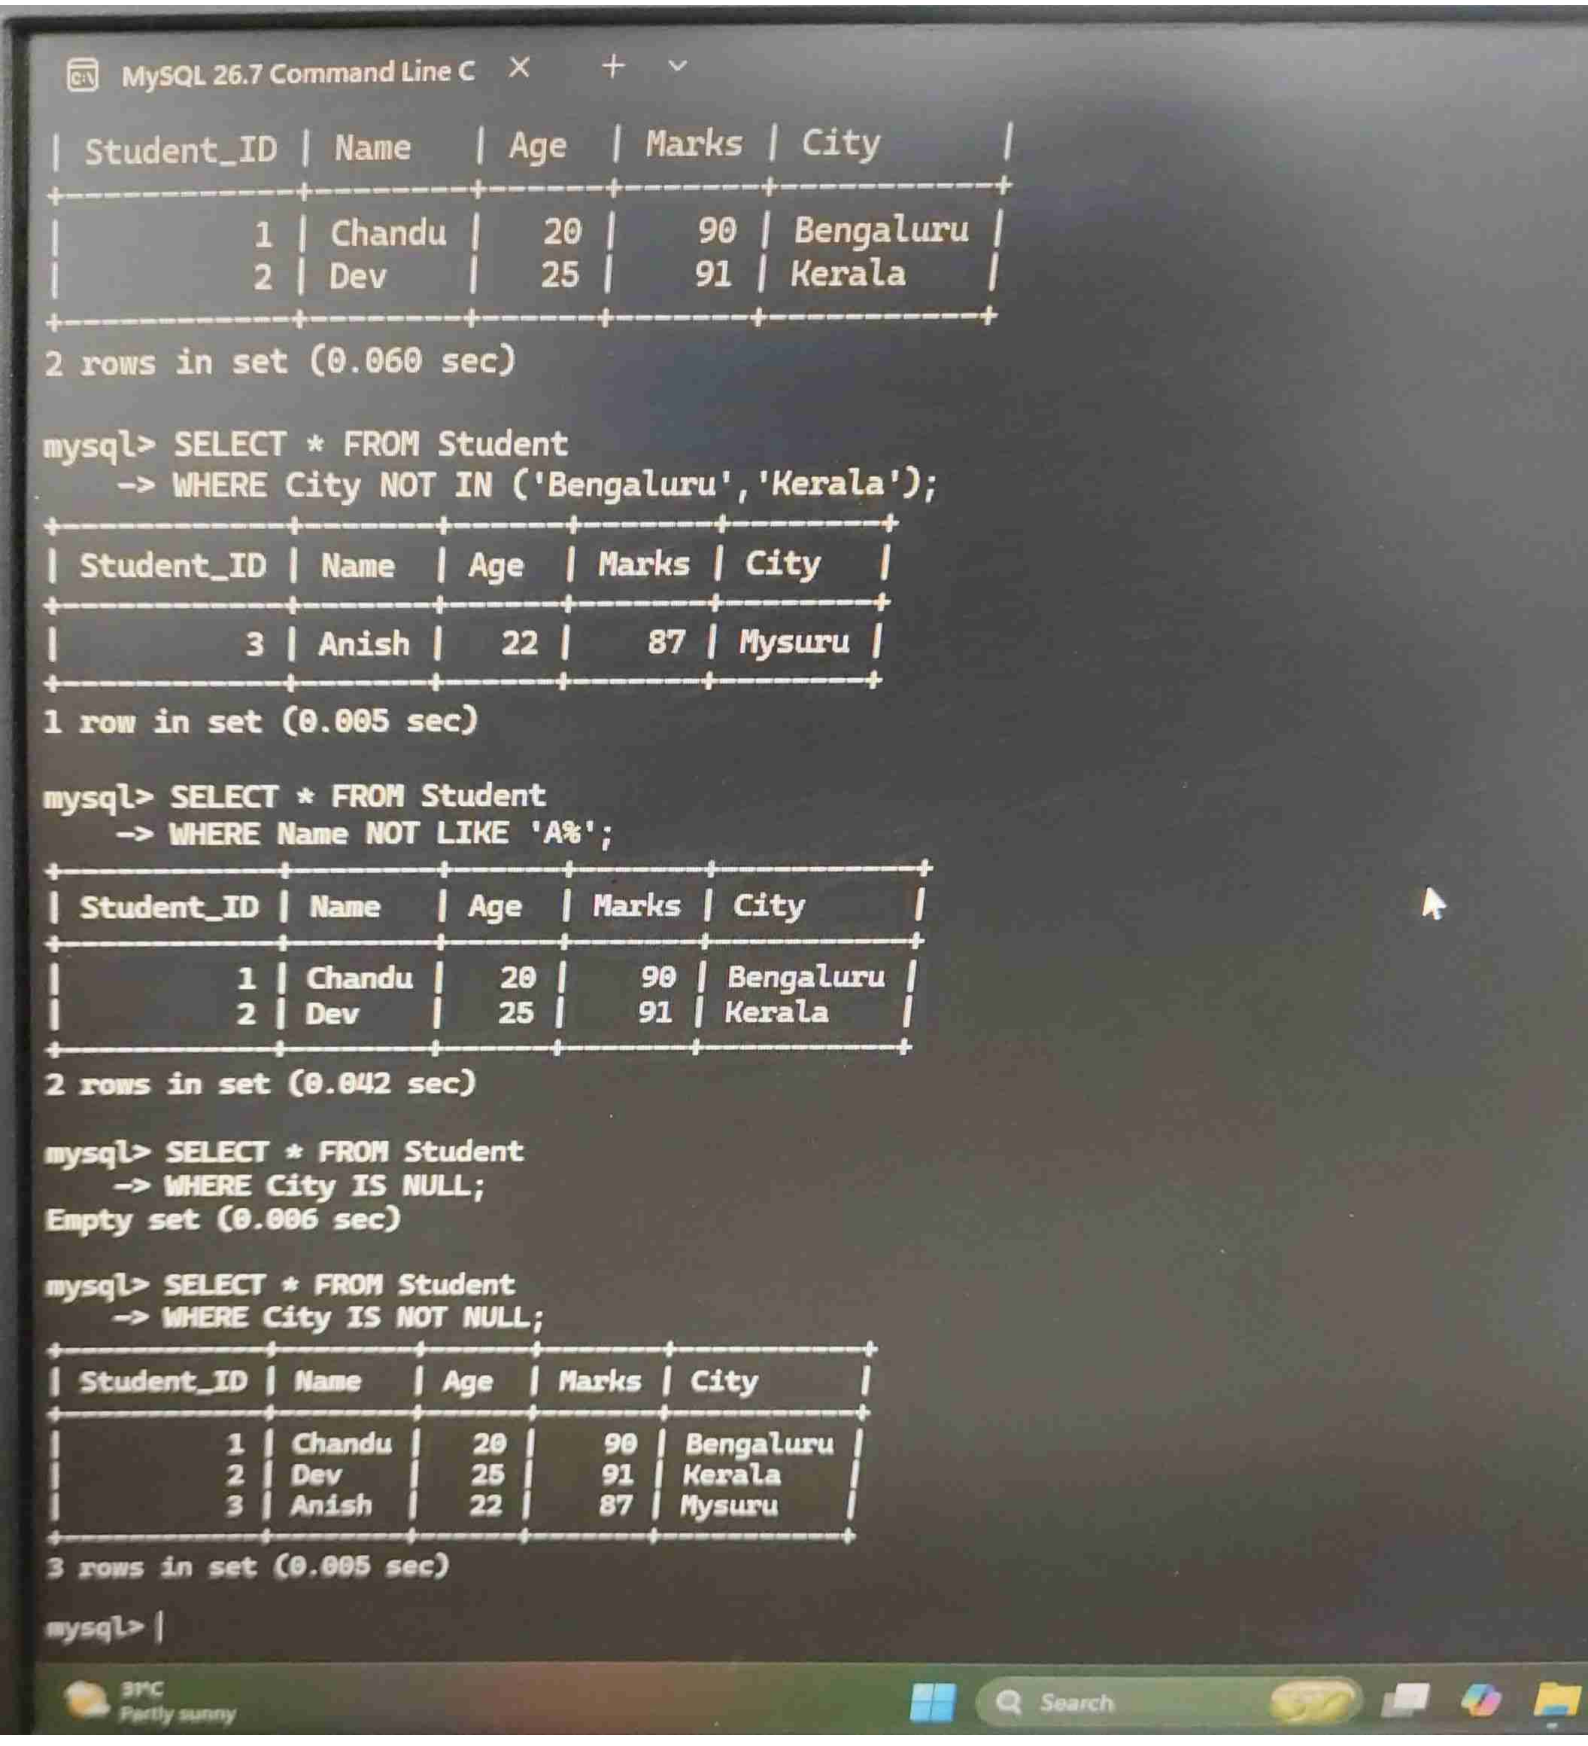
mysql> SELECT 5 >> 1 AS Right_Shift;
+-------------+
| Right_Shift |
+-------------+
|           2 |
+-------------+
1 row in set (0.004 sec)

mysql> SELECT * FROM Student
    -> WHERE Marks BETWEEN 88 AND 92;
+------------+---------+-----+-------+-----------+
| Student_ID | Name    | Age | Marks | City      |
+------------+---------+-----+-------+-----------+
|          1 | Chandu  |  20 |    90 | Bengaluru |
|          2 | Dev     |  25 |    91 | Kerala    |
+------------+---------+-----+-------+-----------+
2 rows in set (0.048 sec)

mysql> SELECT * FROM Student
    -> WHERE City IN ('Bengaluru','Kerala');
+------------+---------+-----+-------+-----------+
| Student_ID | Name    | Age | Marks | City      |
+------------+---------+-----+-------+-----------+
|          1 | Chandu  |  20 |    90 | Bengaluru |
|          2 | Dev     |  25 |    91 | Kerala    |
+------------+---------+-----+-------+-----------+
2 rows in set (0.060 sec)

mysql> SELECT * FROM Student
    -> WHERE City NOT IN ('Bengaluru','Kerala');
```

31°C Partly sunny
Search


MySQL 26.7 Command Line C
Student_ID	Name	Age	Marks	City
1	Chandu	20	90	Bengaluru
2	Dev	25	91	Kerala
2 rows in set (0.060 sec)
mysql> SELECT * FROM Student
-> WHERE City NOT IN ('Bengaluru','Kerala');
| Student_ID | Name | Age | Marks | City |
| 3 | Anish | 22 | 87 | Mysuru |
1 row in set (0.005 sec)
mysql> SELECT * FROM Student
-> WHERE Name NOT LIKE 'A%';
Student_ID	Name	Age	Marks	City
1	Chandu	20	90	Bengaluru
2	Dev	25	91	Kerala
2 rows in set (0.042 sec)
mysql> SELECT * FROM Student
-> WHERE City IS NULL;
Empty set (0.006 sec)
mysql> SELECT * FROM Student
-> WHERE City IS NOT NULL;
Student_ID	Name	Age	Marks	City
1	Chandu	20	90	Bengaluru
2	Dev	25	91	Kerala
3	Anish	22	87	Mysuru
3 rows in set (0.005 sec)
mysql>
Search