

SPRINT DELIVERY – 3

TITLE	Smart Farmer-IOT Enabled Smart Farming Application
DOMAIN NAME	INTERNET OF THINGS
TEAM ID	PNT2022TMID30440
LEADER NAME	GUNAPRIYA.B
TEAM MEMBER NAME	DEEPA.T CHANDRALEKHA. U SANDHIYA.S

Configuration of Node-Red to send commands to IBM cloud

ibmiot out node I used to send data from Node-Red to IBM Watson device. So, after adding it to the flow we need to configure it with credentials of our Watson device.

The screenshot shows the 'Edit ibmiot in node' configuration window in Node-RED. The window has a title bar with 'Node-RED : node-red-hdyfv-202' and a close button. Below the title bar is the URL 'ed/#flow/c7ddb1462b8a000c'. The main area is titled 'Edit ibmiot in node' and contains several configuration options:

- Authentication:** A dropdown menu set to 'API Key'.
- API Key:** A text input field containing 'IBMIOT APIKEY' with a search icon on the left and an edit icon on the right.
- Input Type:** A dropdown menu set to 'Device Event'.
- Device Type:** A radio button labeled 'All or' followed by a text input field containing 'abcd'.
- Device Id:** A radio button labeled 'All or' followed by a text input field containing '7654321'.
- Event:** A radio button labeled 'All or' with a checked checkbox, followed by a text input field containing '+'.
- Format:** A radio button labeled 'All or' followed by a text input field containing 'json'.
- QoS:** A dropdown menu set to '0'.
- Name:** A text input field containing 'IBM IoT'.

At the bottom of the configuration area, there is a checkbox labeled 'Enabled' which is currently unchecked. The window also features 'Delete', 'Cancel', and 'Done' buttons at the top right. The background shows the Node-RED interface with a sidebar on the left and a taskbar at the bottom.

Here we add two buttons in UI

1 -> for motor on

2 -> for motor off

We used a function node to analyse the data received and assign command to each number.

The Java script code for the analyses is:

```
if(msg.payload===1)
```

```
msg.payload={"command": "ON"};
```

```
else if(msg.payload===0)
```


```
msg.payload={"command":
```

```
"OFF"};
```

Then we use another function node to parse the data and get the command and represent it visually with text node.


The Java script code for that function node is:

```
var state=msg.payload;  
msg.payload = state.command;  
return msg;
```

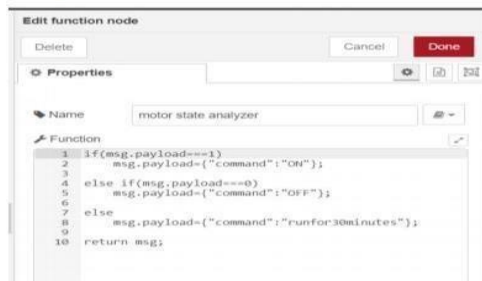


The above images show the java script codes of analyser and state function nodes.

Then we add edit json node to the conversion between JSON string & object and finally connect it to IBM IoT Out.

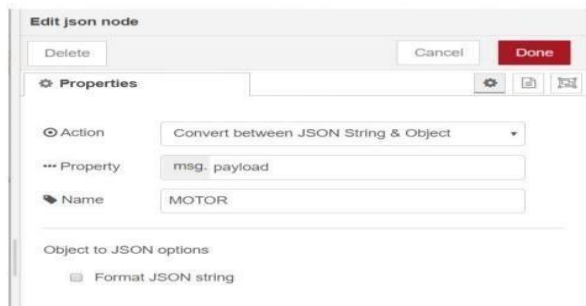

Edit JSON node needs to be configured like this

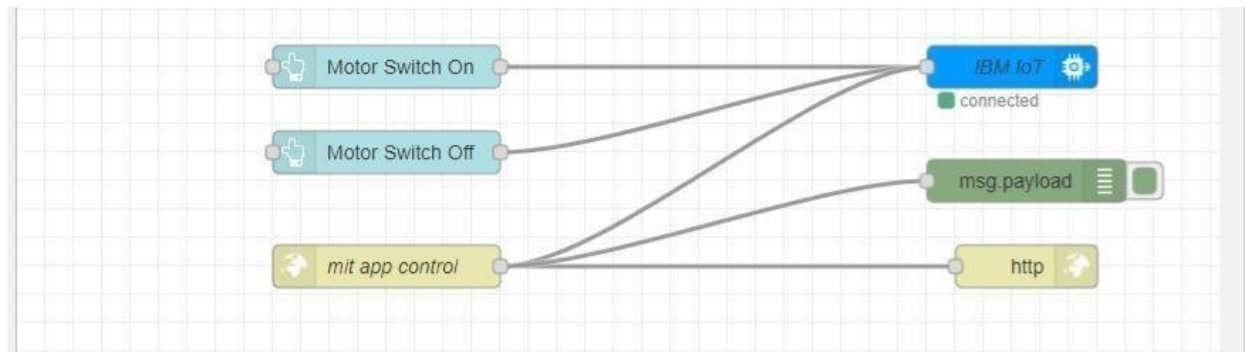


This is the program flow for sending commands to IBM cloud.

Adjusting User Interface


In order to display the parsed JSON data a Node-Red dashboard is created

Here we are using Gauges, text and button nodes to display in the UI and helps to monitor the parameters and control the farm equipment.


Below images are the Gauge, text and button node configurations.

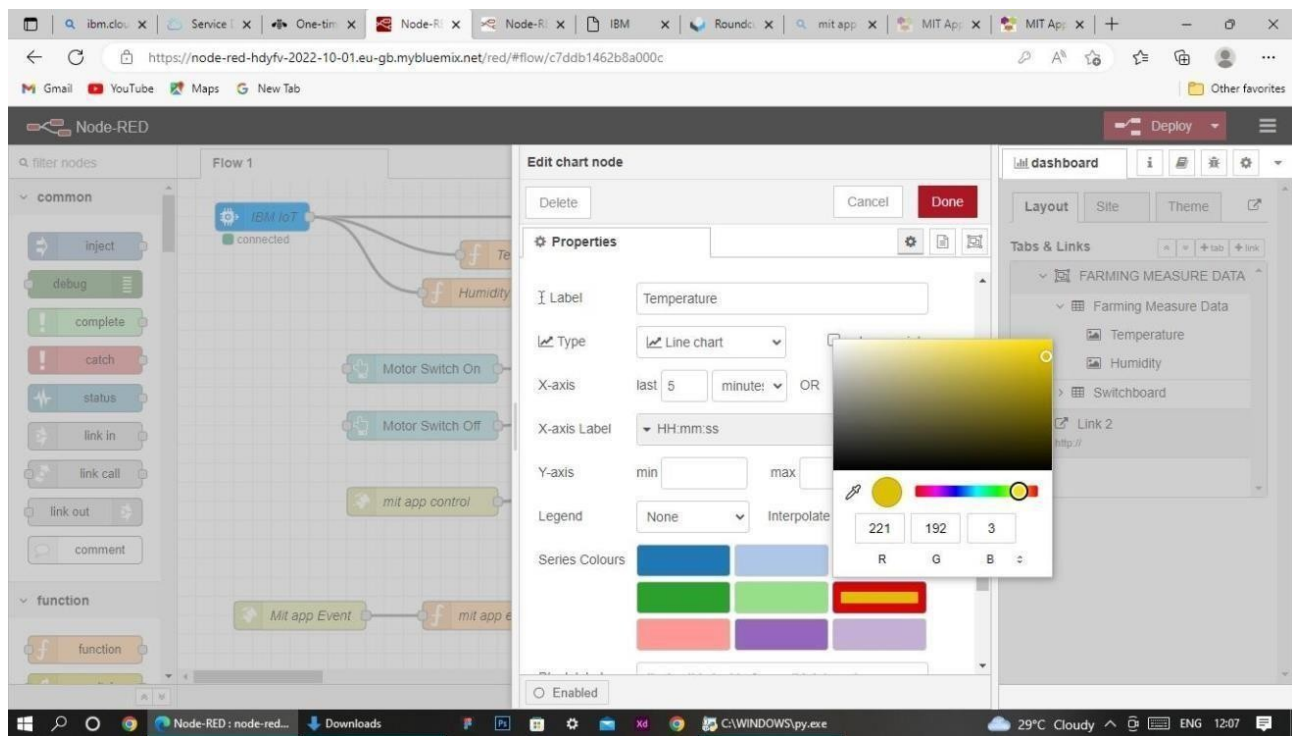


Complete Program Flow

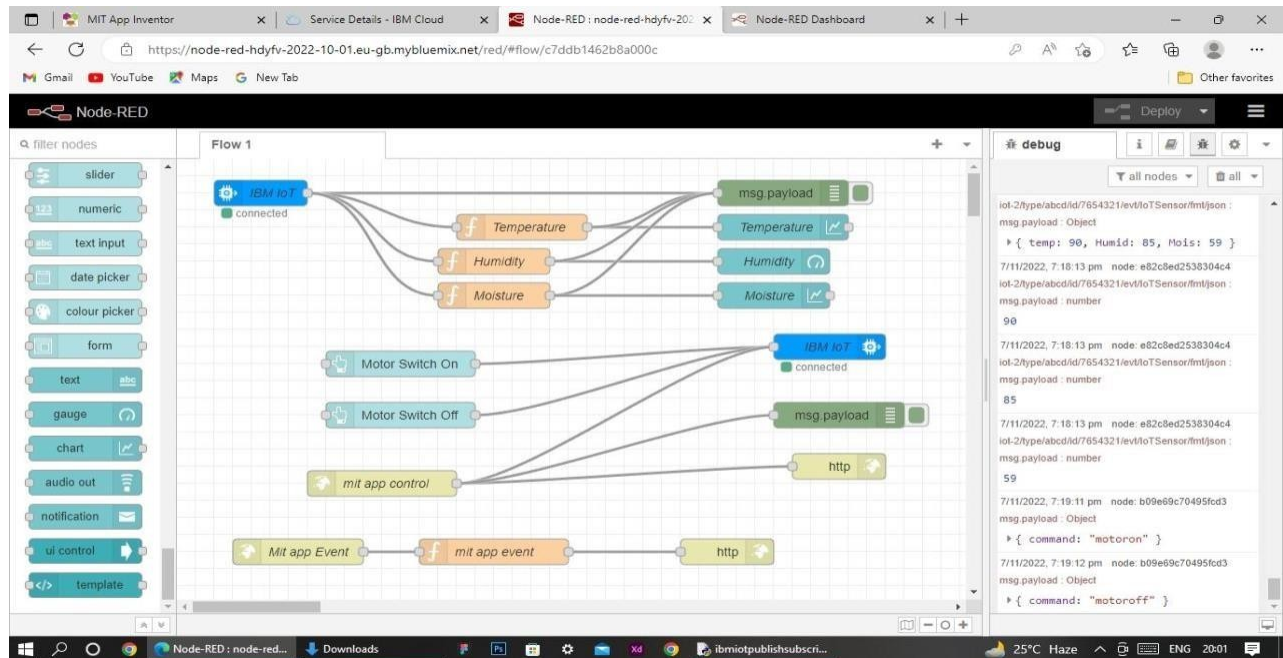

MOBILE APP WEB :

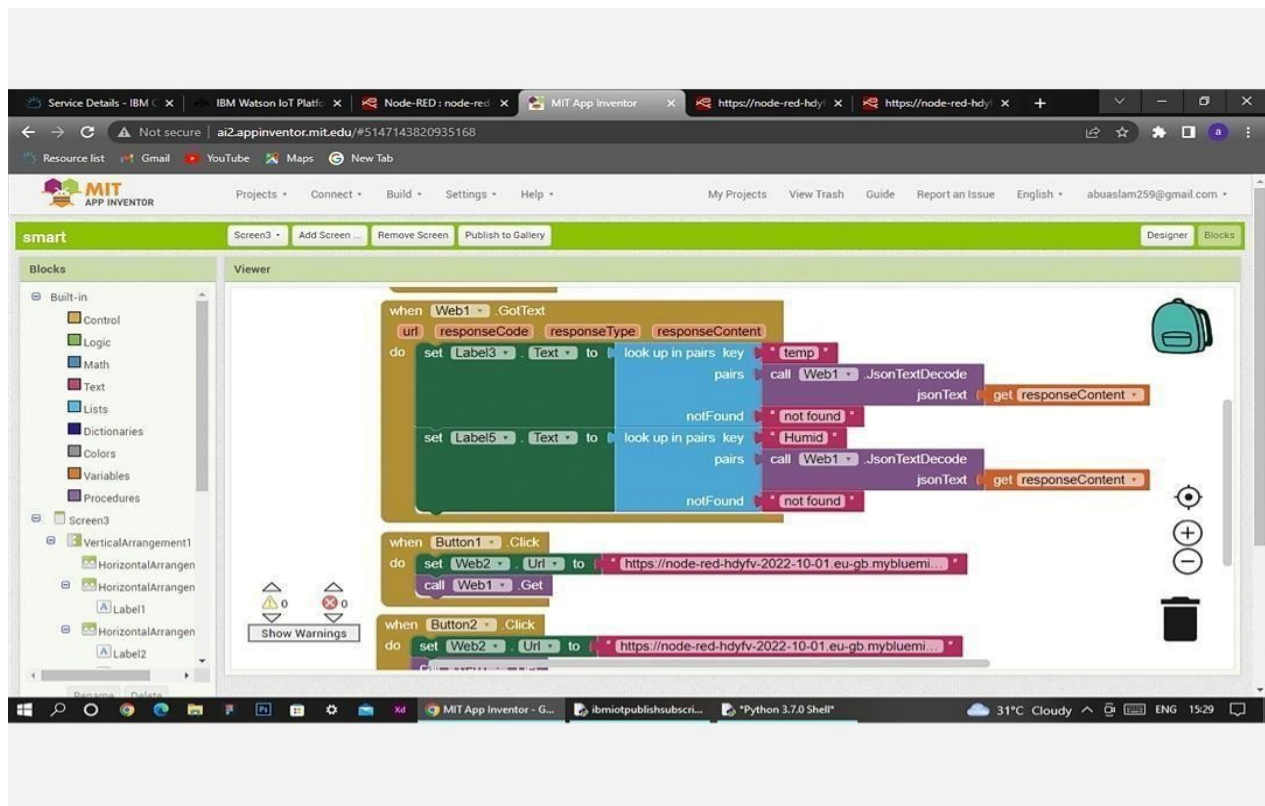


BLOCK DIAGRAM

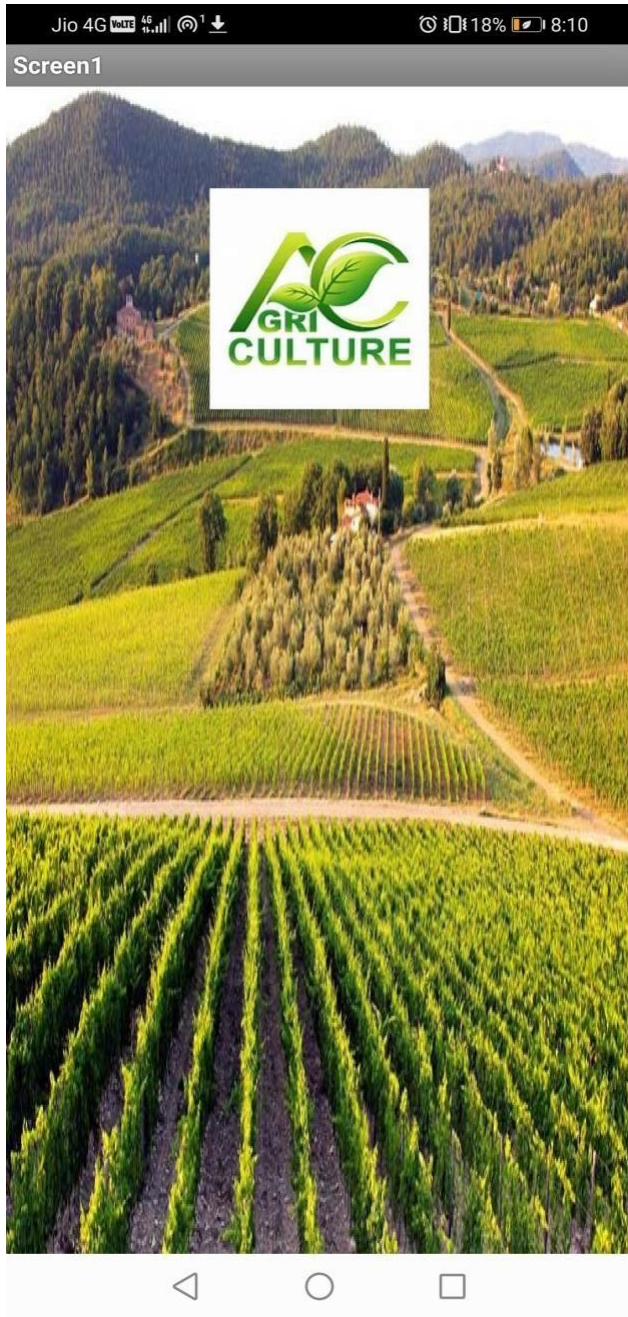

SCREEN – 1



SCREEN - 2

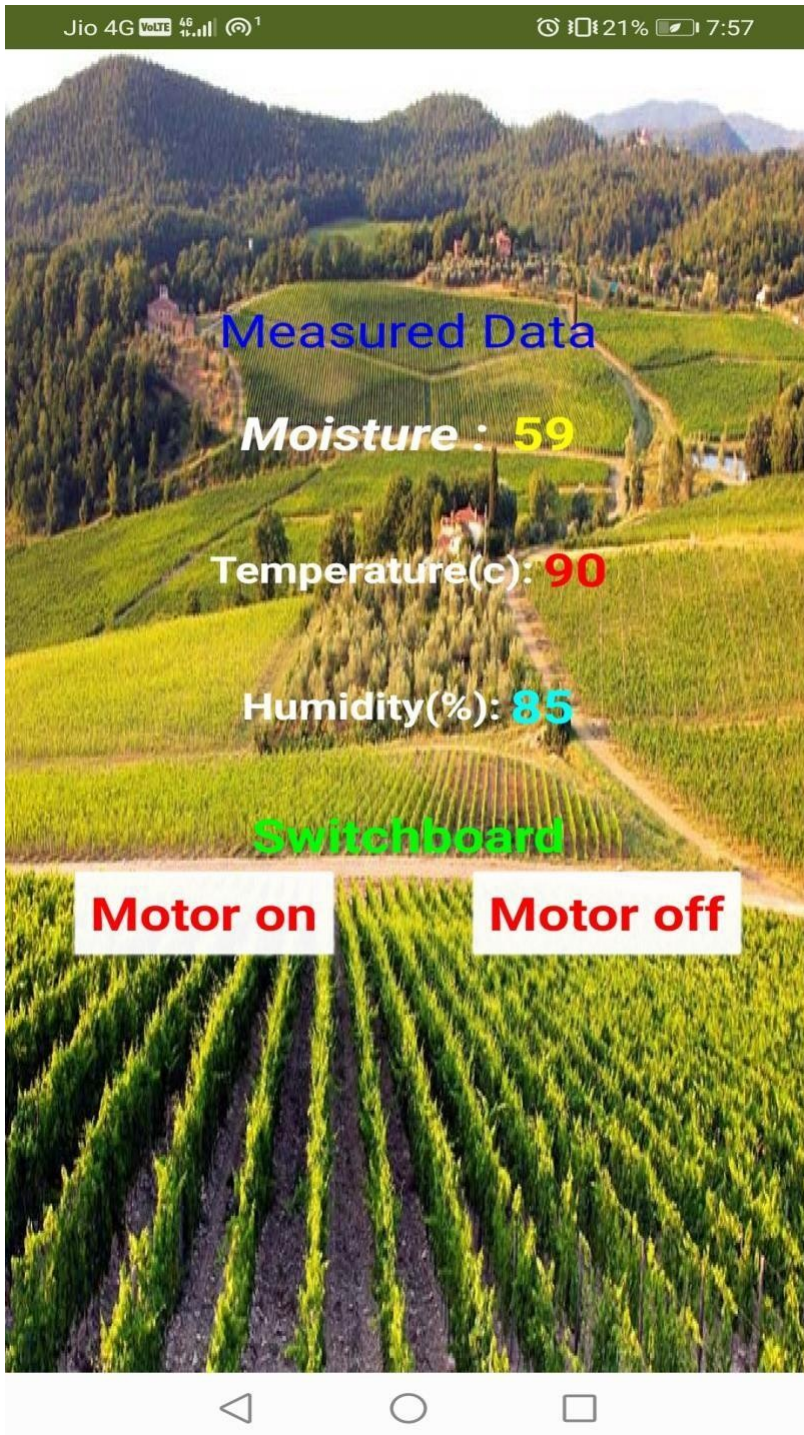

SCREEN - 3

Web APP UI Home Tab

